


Manual Switches

Electronic Control Pushbutton

MML21 Series

LED, INCANDESCENT, OR NON-LIGHTED DISPLAY

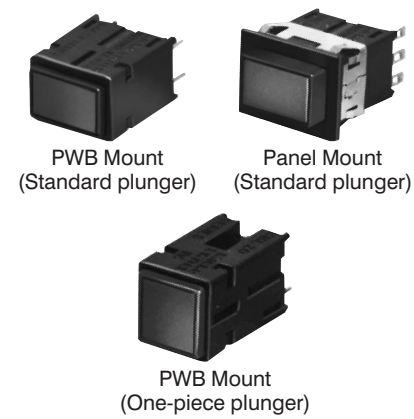

- FEATURES**
- Silver or gold contacts
 - Choice of rectangular or square housings
 - Accepts one LED or incandescent lamp
 - Printed wiring board or snap-in panel mounting
 - Bezels and mounting clips, LEDs and legended lenses can be furnished installed or ordered separately
 - UL recognized, CSA certified

Example: MML21KK3AAK
Electronic control pushbutton switch with standard plunger; rectangular housing (black); bezel (black); mounting clips on long sides, PWB terminals; 1-pole, momentary action, silver contacts, black plunger.

Example: MML21KK3AAKRSDR
As above, except furnished with red LED and red lens installed.

MML21KK3AAHRSXX20 as above, legended.

Catalog listing codes for switch, less assembled display options

MML21 STANDARD PLUNGER SWITCHES ORDER GUIDE

MML21K		K		3		AA	
Housing Type		Mounting		Terminals		Circuitry/Action (Each pole is double throw)	
		Rectangular	Square			Rectangular	Square
MML21K Rectangular Black Housing		A No bezel (PWB mounting)	A No bezel (PWB mounting)	3 Printed Wiring Board		Silver Contacts: AA 1 pole, mom. action	Silver contacts: AA 1-pole, mom. action
MML21H Square Black Housing		K Black bezel, mtg. clip/long sides	R Black bezel & mtg. clip	2 Solder		AB 1 pole, alt. action AC 2 pole, mom. action AD 2 pole, alt. action Gold Contacts: BA 1 pole, mom. action BB 1 pole, alt. action BC 2 pole, mom. action BD 2 pole, alt. action	AB 1-pole, alt. action BA 1-pole, mom. action BB 1-pole, alt. action

MML21 ONE PIECE LENS/PLUNGER SWITCHES ORDER GUIDE

Catalog listing codes for switch, less assembled display options

MML21H		K		3		AA	
Housing Type		Mounting		Terminals		Circuitry/Action (Each pole is double throw)	
		Rectangular	Square			Rectangular	Square
MML21K Rectangular Black Housing		A No bezel (PWB mounting)	A No bezel (PWB Mounting)	3 Printed Wiring Board		Silver Contacts: AA 1 pole, mom. action	Silver contacts: AA 1-pole, mom. action
MML21H Square Black Housing		K Black bezel, mtg. clip/long sides	R Black bezel & mtg. clip	2 Solder		AB 1 pole, alt. action AC 2 pole, mom. action AD 2 pole, alt. action Gold Contacts: BA 1 pole, mom. action BB 1 pole, alt. action BC 2 pole, mom. action BD 2 pole, alt. action	AB 1-pole, alt. action BA 1-pole, mom. action BB 1-pole, alt. action

Electrical Data page 69
Bezels page 84
Strip and matrix mounting page 83
PWB pin locations page 91

Order display options assembled to switch by adding codes below³

Diagram showing switch configurations for Plunger Type (K, W), LED* (XX, RS, YS, GS), Lens (XX, DR, DY, DG, LR, LY, LG, LW, LK), and Legend (20). Includes a CUSTOMER INSTALLATION section with instructions for LED and Incandescent Lamp.

Order display options assembled to switch by adding codes below

Diagram showing switch configurations for Button Color (One Piece Plunger) (H, L, N, R, Y, G, Z), LED* (XX, RS, YS, GS), and Legend (XX20). Includes instructions for legend order sheet FO-74024.

- *Notes:
1. When an LED is specified in a rectangular MML21 listing, MICRO SWITCH will permanently install it in the housing.
2. MICRO SWITCH does not permanently install an LED in a square MML21 listing. To install an LED in a square housing, order a MML93L or MML93G receptacle and a MML92 LED (see pages 86 and 88).
3. Include four digits (XXXX or XX DR) when a legend is required.
4. For square or rectangular only.
5. For rectangular only.

Manuals

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Honeywell:

[MML21HR2AAKXXLK](#) [MML21KA3BAKXXLK](#) [MML21KK2BAKXXDG](#) [MML21KA3BAK-004](#) [MML21KA3BAKXXDR](#)
[MML21KK2ADK](#) [MML21KA3ADKYSIW](#) [MML21KK2BAKXXLW20](#) [MML21HA3BBK](#) [MML21HA3AAK](#) [MML21KA2ADK](#)
[MML21KK3ADKRSDR](#) [MML21HR3AAKXXLW](#) [MML21KK2BBKXXLK20](#) [MML21HA3AAKXXDY](#) [MML21HR2AAK](#)
[MML21KA3AAKYSIDY](#) [MML21HR2ABK](#) [MML21KK2AAKRSDR](#) [MML21HA3AAN](#) [MML21KK3BCK](#)
[MML21HA3BAKXXDY](#) [MML21KA3ACKYSIW](#) [MML21KA3AAR](#) [MML21HA2ABK](#) [MML21HA3BAHXXXX20](#)
[MML21HR3BAN](#) [MML21KA2ABK](#) [MML21HA2AAKXXLG](#) [MML21HA3AAKXXDR](#) [MML21KK2ABKGSDG](#)
[MML21KA3AAK](#) [MML21HA2AAK](#) [MML21KA3BCK](#) [MML21KA2BAK](#) [MML21KA3BAK](#) [MML21HA3BAZXXXX20](#)
[MML21KK2BAKXXLW](#) [MML21KA3BCKRSDR](#) [MML21HR2AAR](#) [MML21HR3BAH](#) [MML21HR2BBK](#) [MML21KA3ADK](#)
[MML21HA3AAH](#) [MML21KA3ACK](#) [MML21KA3AAKXXLW](#) [MML21HA3AAKXXDG](#) [MML21HA2AAKXXLR](#)
[MML21KK2AAKYSIDY](#) [MML21KK3AAKRSDR](#) [MML21HA3ABZ](#) [MML21HA3BANXXXX20](#) [MML21KA3ADKRSDR](#)