
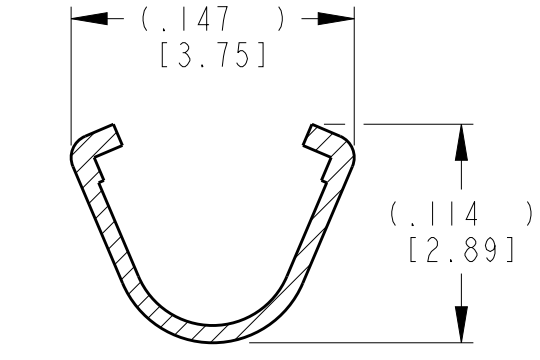
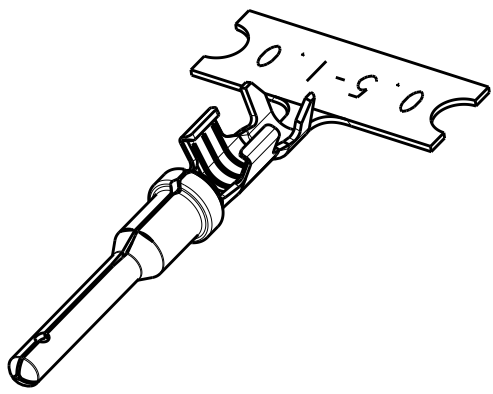



2

1

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			D	REVISED PER E.O. PI9510	18MAY2007	JA	RDR
			E	REVISED PER E.O. P20396	25JUN2010	JA	RDR
			F	REVISED PER ECO-15-007761	28MAY2015	RL	DM
			FI	REVISED PER PCN E-17-014802	06OCT2017	AJ	DM

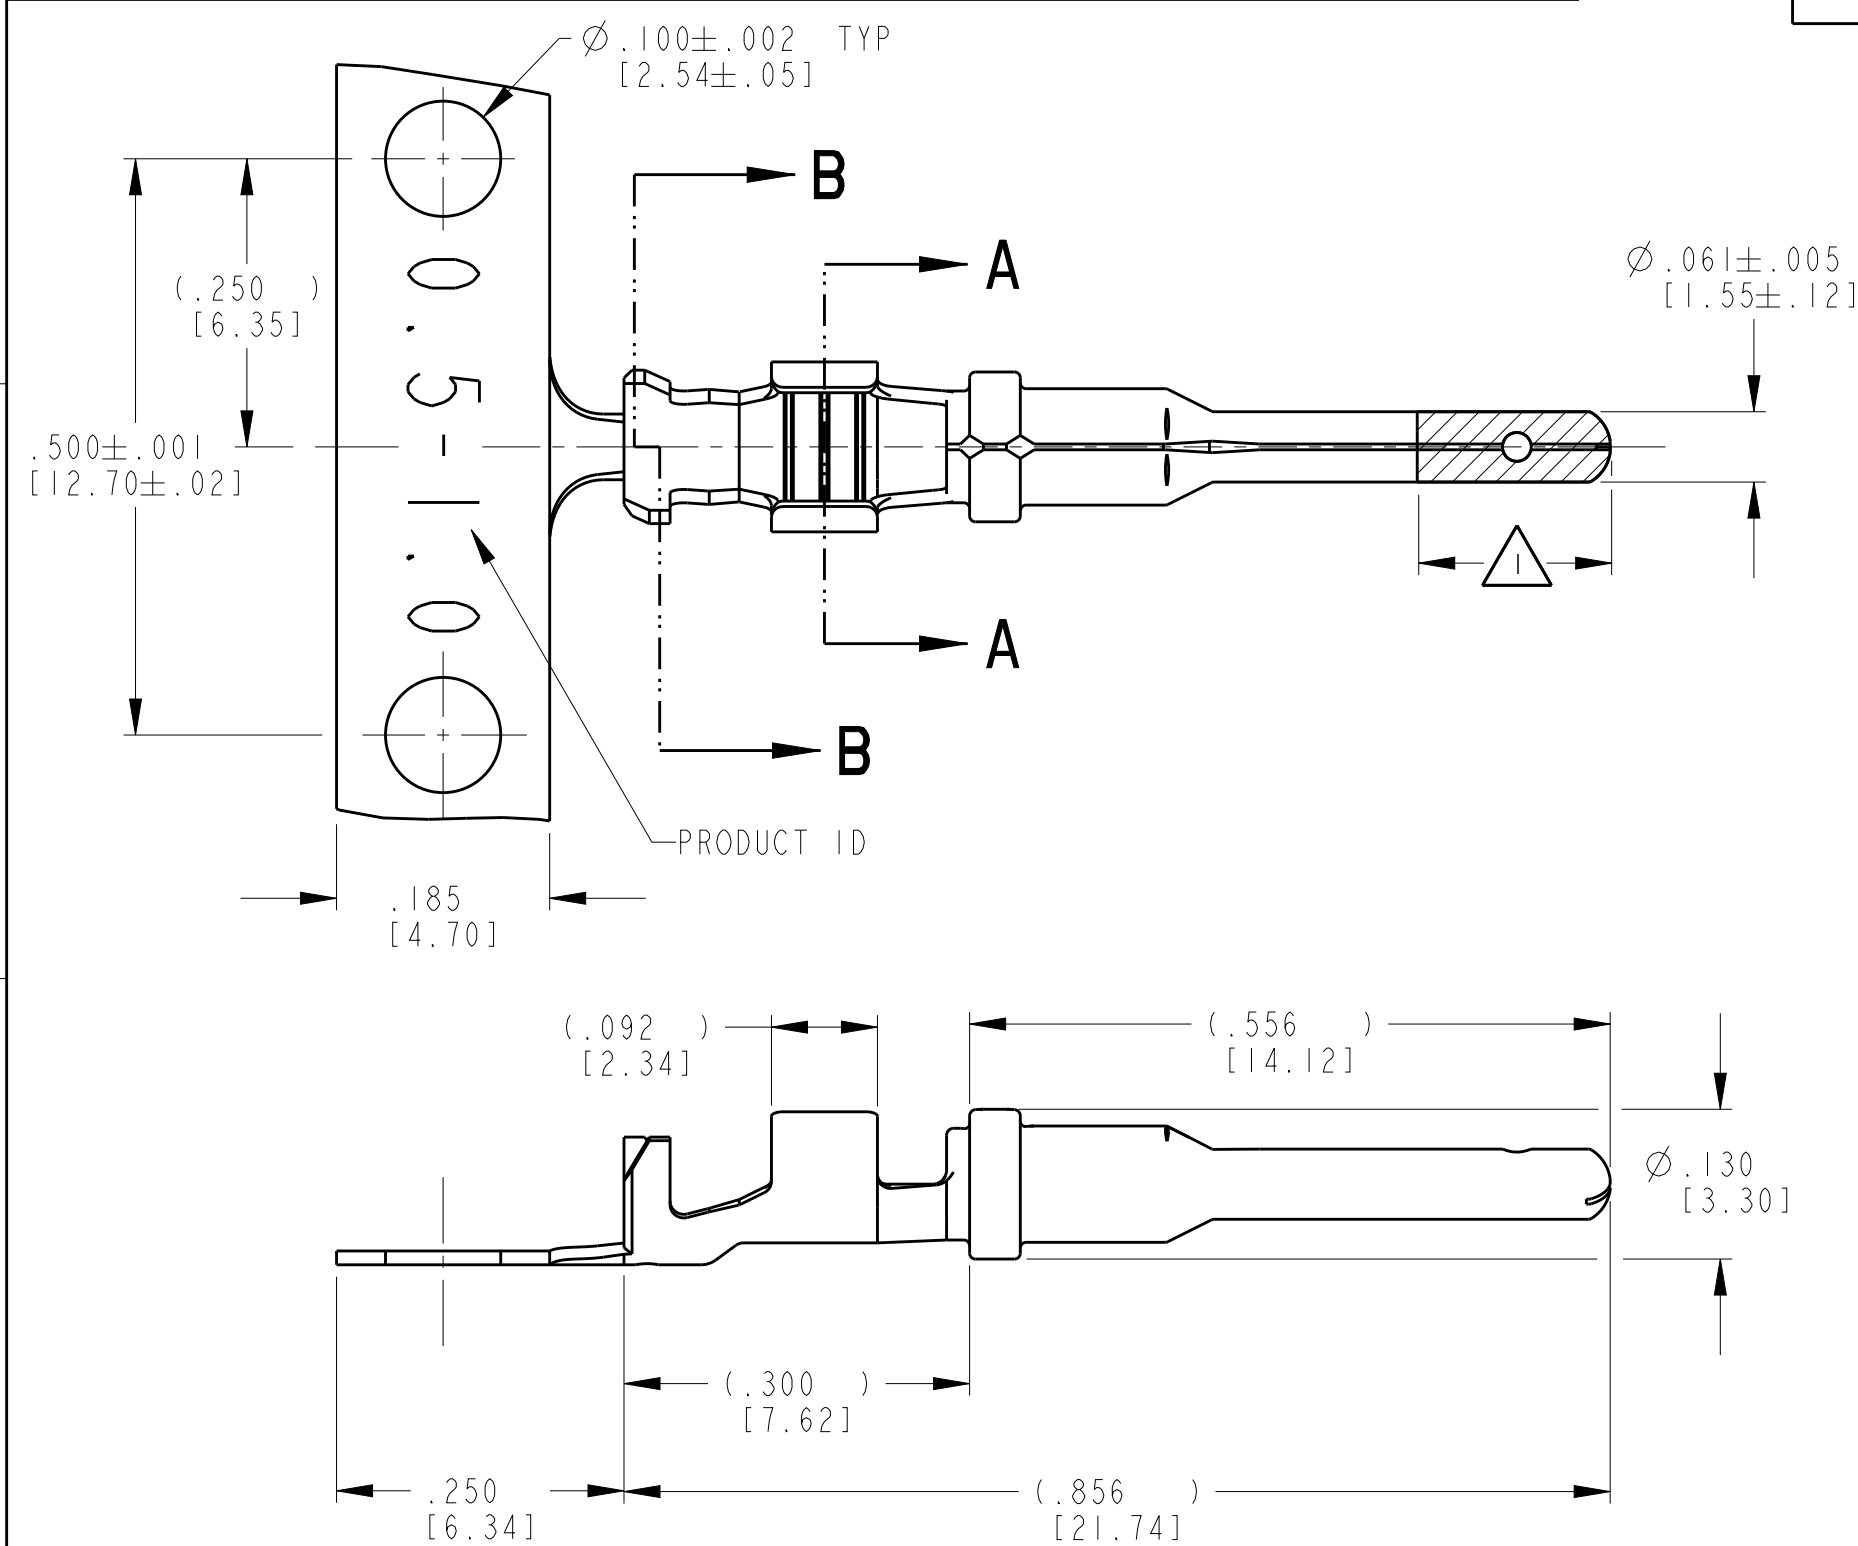

SECTION A-A
WIRE BARREL

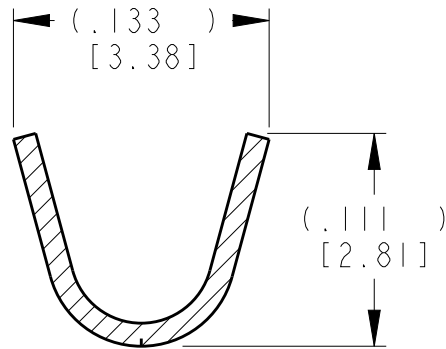


SECTION B-B
INSULATION BARREL

TE INTERNAL PN	DEUTSCH PN	PLATING
1060-16-0622	1060-16-0622	NICKEL
1060-16-0644	1060-16-0644	SELECTIVE GOLD
1060-16-0677	1060-16-0677	TIN
1060-16-0688	1060-16-0688	PALLADIUM NICKEL GOLD

- 3 MATERIAL: .012 [0.30] THICK COPPER ALLOY
2. WIRE RANGE: 20 AWG TO 16 AWG [0.5-1.0 mm²]
INSULATION RANGE: Ø.055-.100 [Ø1.40-2.54]
- 1 APPLIED ONLY TO SELECTIVE GOLD 1060-16-0644.
INDICATED DIMENSION SHOWS GOLD PLATED AREA.

NOTES: UNLESS OTHERWISE SPECIFIED

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN STEVE PALLUTH 28NOV2000		 TE Connectivity									
DIMENSIONS: INCHES[mm]		CHK VLADIMIR TOMSA 06DEC2000											
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. REED 08DEC2000		NAME STAMPED CONTACT PIN SIZE 16								
	0 PLC ±		PRODUCT SPEC										
	1 PLC ±		0425-015-0000										
	2 PLC ±		APPLICATION SPEC										
3 PLC ±.025 [0.64]		114-151000		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO			
4 PLC ±		WEIGHT		A3		4AFU8		C-1060-16-06XX					
ANGLES ±		0.32 g		Customer Drawing		SCALE		SHEET		OF		REV	
MATERIAL 		FINISH SEE TABLE				6:1		1		1		FI	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

[1060-16-0688 \(Cut Strip\)](#) [1060-16-0622 \(Mouser Reel\)](#) [1060-16-0622 \(Cut Strip\)](#) [1060-16-0988 \(Mouser Reel\)](#) [1060-16-0644 \(Cut Strip\)](#) [1060-16-0644 \(Mouser Reel\)](#) [1060-16-0988 \(Cut Strip\)](#) [1060-16-0688 \(Mouser Reel\)](#) [1060-16-0644 \(Loose Piece\)](#) [1060-16-0622 \(Loose Piece\)](#) [1060-16-0688 \(Loose Piece\)](#) [1060-16-0988 \(Loose Piece\)](#)