


NOTES 1 : LEAD CO-PLANARITY INCLUDE REINFORCED METAL FITTINGS SHALL BE 0.1mm MAX.
 2> HRS MARK AND CAV NO. ARE INDICATED IN APPROX POSITION SHOWN.
 3> 9 TO 25 CONTACT CONNECTORS HAVE ONE LOCK AT CENTER OF HOUSING.
 31 TO 51 CONTACT CONNECTORS HAVE TWO LOCKS AS PER DRAWING.

2	PHOSPHOR BRONZE	CONTACT AREA:GOLD PLATED 0.2 μ m min LEAD AREA:TIN PLATED 1 μ m min UNDER PLATING:NICKEL 0.3 μ m min	7	PS	REINFORCEMENT COLLAR
			6	PS	BLACK(PLASTIC REEL)
			5	POLYIMIDE	BROWN(HEAT-RESISTANCE TAPE)
			4	POLYESTER	CLEAR(COVER TAPE)
1	POLYAMIDE	BEIGE, UL94V-0	3	PS	CLEAR(EMBOSSSED CARRIER TAPE)
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED :KH. IKEDA	12. 01. 16	DRAWING NO.	EDC3-162417-03			
		CHECKED :AR. TAKAHASHI	12. 01. 16	PART NO.	DF9A-*S-1V(69)			
		DESIGNED :SH. HOSODA	12. 01. 16	CODE NO.	CL540-			
		DRAWN :KR. AJITO	12. 01. 16	 				

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

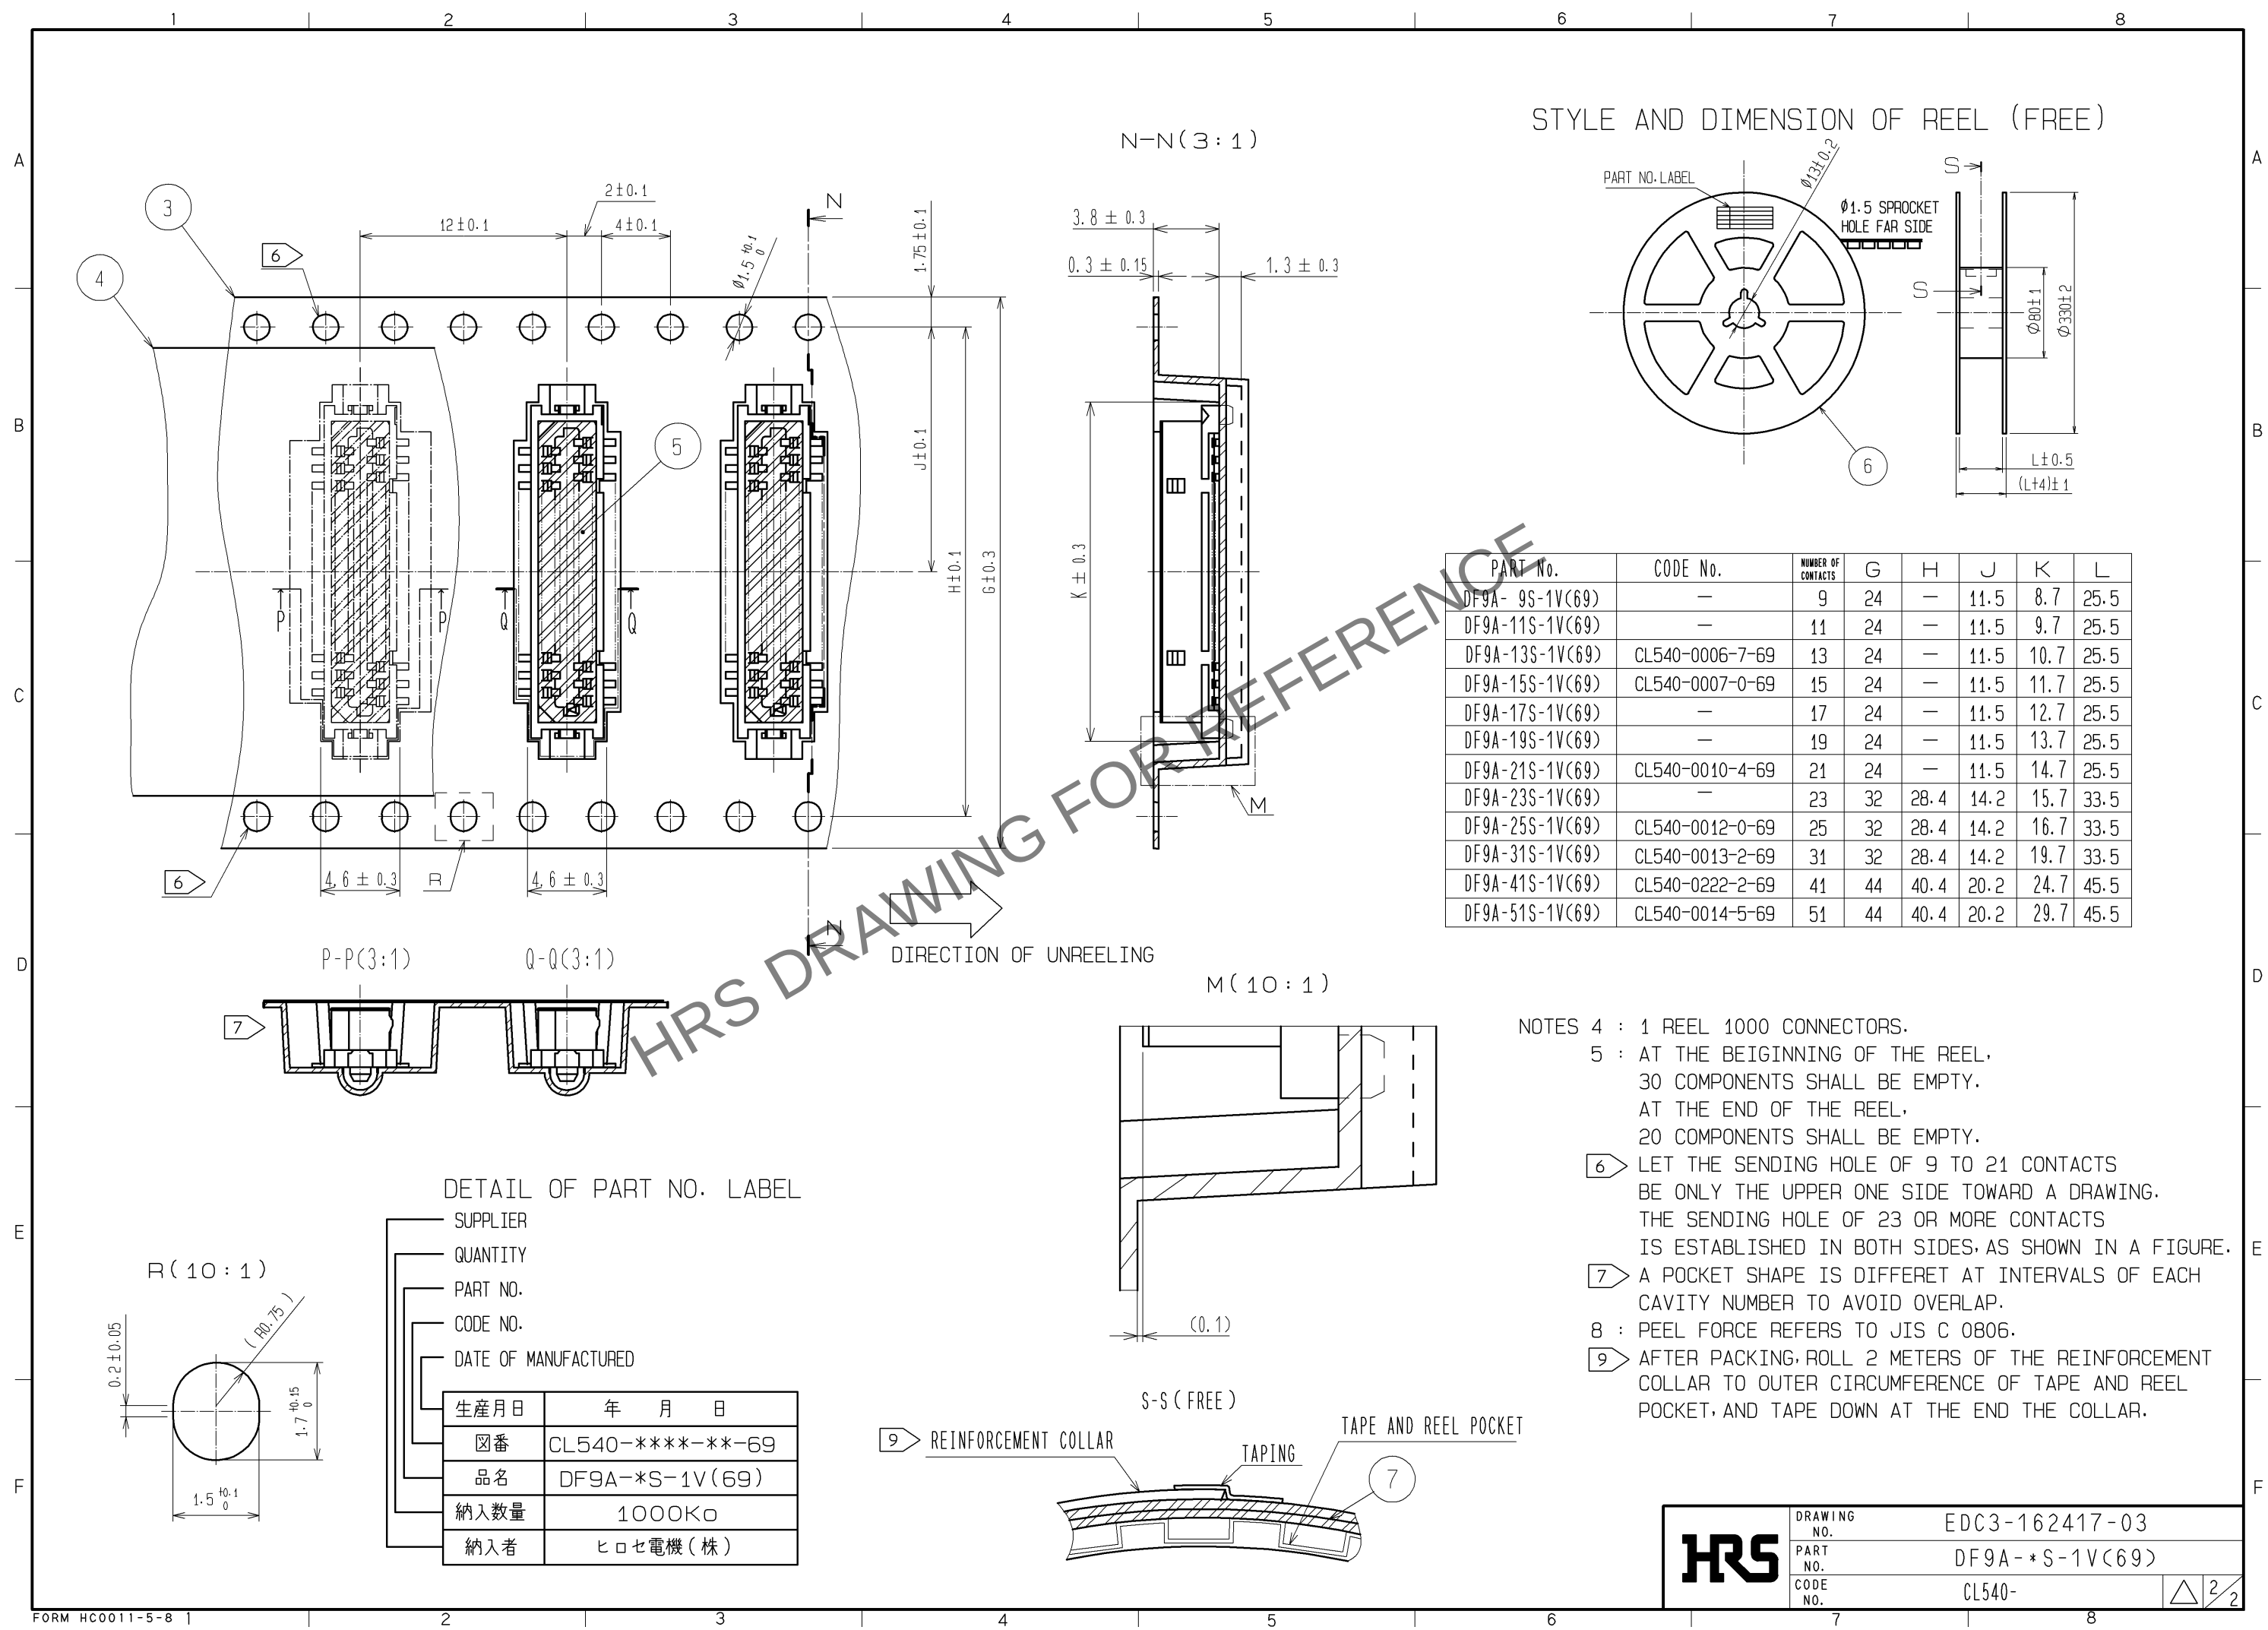

DRAWING NO.	EDC3-162417-03	
PART NO.	DF9A-*S-1V(69)	
CODE NO.	CL540-	22