



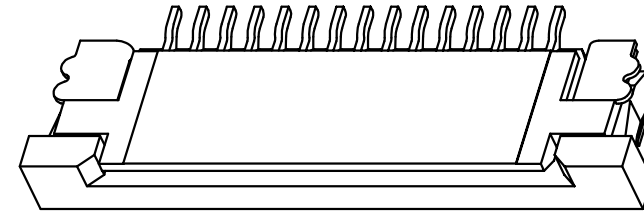


技术指标(Technical Index):

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena.)
2. 温度范围(Temperature range): $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$.
3. 额定电压(Rated voltage): 50V, AC/DC(=等效).
4. 接触电阻(Contact resistance): $\leq 0.03\Omega$.
5. 绝缘电阻(Insulation resistance): $\geq 500\text{M}\Omega$.

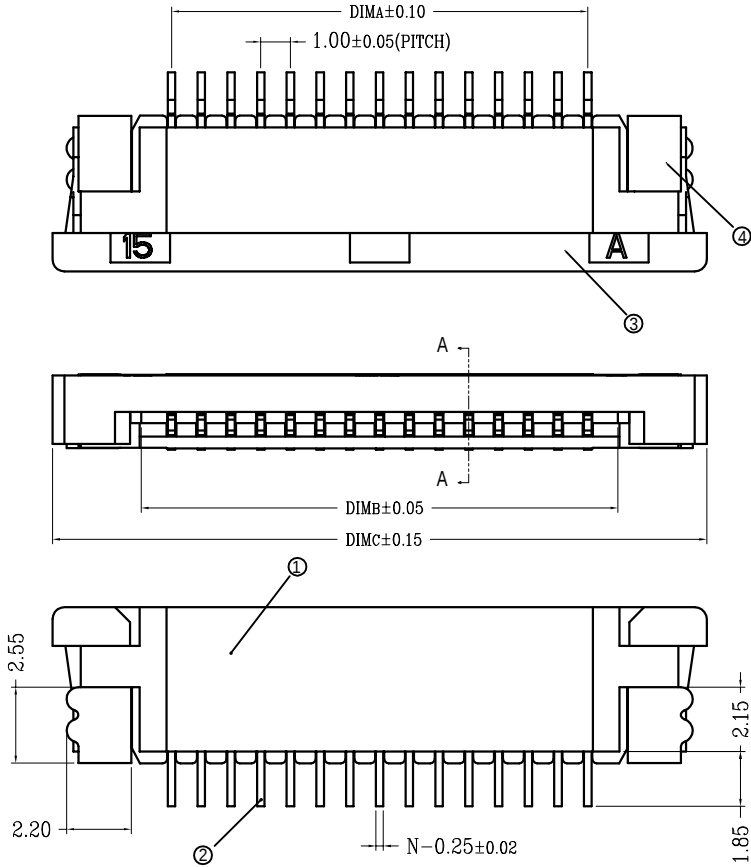

SECTION A-A

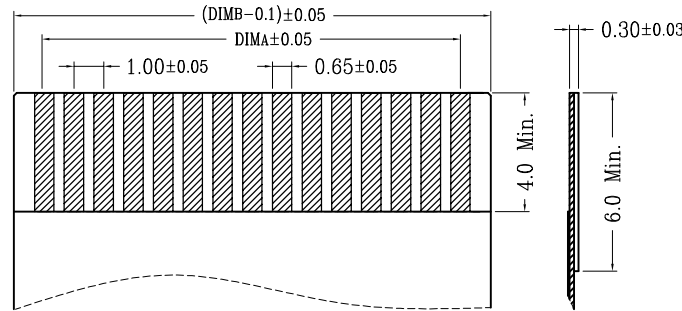

适用扁平线(Applicable Flat Cable)

CKT	DIM A	DIM B	DIM C
4	3.00	5.03	11.10
5	4.00	6.03	12.10
6	5.00	7.03	13.10
7	6.00	8.03	14.10
8	7.00	9.03	15.10
9	8.00	10.03	16.10
10	9.00	11.03	17.10
11	10.00	12.03	18.10
12	11.00	13.03	19.10
13	12.00	14.03	20.10
14	13.00	15.03	21.10
15	14.00	16.03	22.10
16	15.00	17.03	23.10
17	16.00	18.03	24.10
18	17.00	19.03	25.10
19	18.00	20.03	26.10
20	19.00	21.03	27.10
21	20.00	22.03	28.10
22	21.00	23.03	29.10
23	22.00	24.03	30.10
24	23.00	25.03	31.10
25	24.00	26.03	32.10
26	25.00	27.03	33.10
27	26.00	28.03	34.10
28	27.00	29.03	35.10
29	28.00	30.03	36.10
30	29.00	31.03	37.10
31	30.00	32.03	38.10
32	31.00	33.03	39.10
33	32.00	34.03	40.10
34	33.00	35.03	41.10
35	34.00	36.03	42.10
36	35.00	37.03	43.10
37	36.00	38.03	44.10
38	37.00	39.03	45.10
39	38.00	40.03	46.10
40	39.00	41.03	47.10

序号	品名	材质
①	1.0K型胶芯(H2.5) 1.0K Type Housing (H2.5)	LCP UL94V-0 本色 Natural
②	1.0K型下端子(H2.5) 1.0K Type Under Terminal (H2.5)	铜合金/表面镀锡 Copper Alloy/ Tin Plating
③	1.0K型卧式后盖(H2.5) 1.0K Type Fitting (H2.5)	LCP UL94V-0 黑色 Black
④	1.0K型卧式焊片(H2.5) 1.0K Type Fitting Nail(H2.5)	铜合金/表面镀锡 Copper Alloy/ Tin Plating

深圳市万骏达电子有限公司 http://www.wanjunda.com	
品名 (ITEM NO)	1.0 Pitch K型卧式下接(H=2.5) 1.0 Pitch H2.5 ZIF R/A Type Under CONN.
料号 (PART NO)	FPC-1.0-nP-2.5H-X
模号 (MODEL NO)	

图号 (DWG NO)		单位 (UNIT): MM
版本 (REV)		比例 (SCALE): 1:1
日期 (DATE)		
设计 (DESIGN)		
审核 (CHECKED)		
核准 (APPROVED)		

未注公差 TOLERANCE UNSPECIFIED
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
X' ±5°
X.X" ±2°

适用线路板(PCB LAYOUT)