

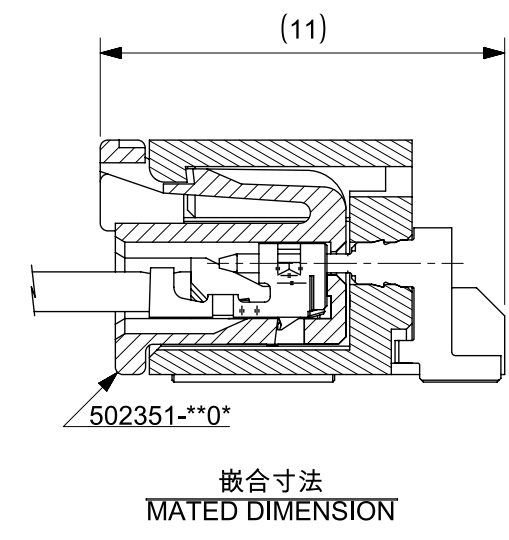
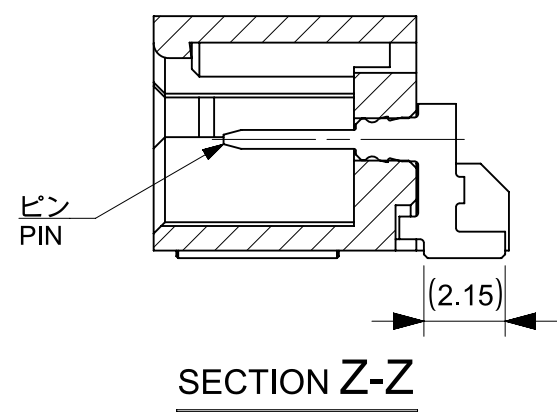
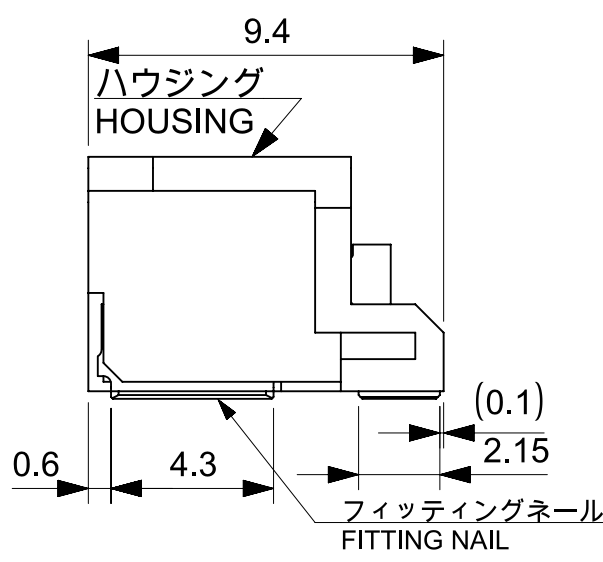
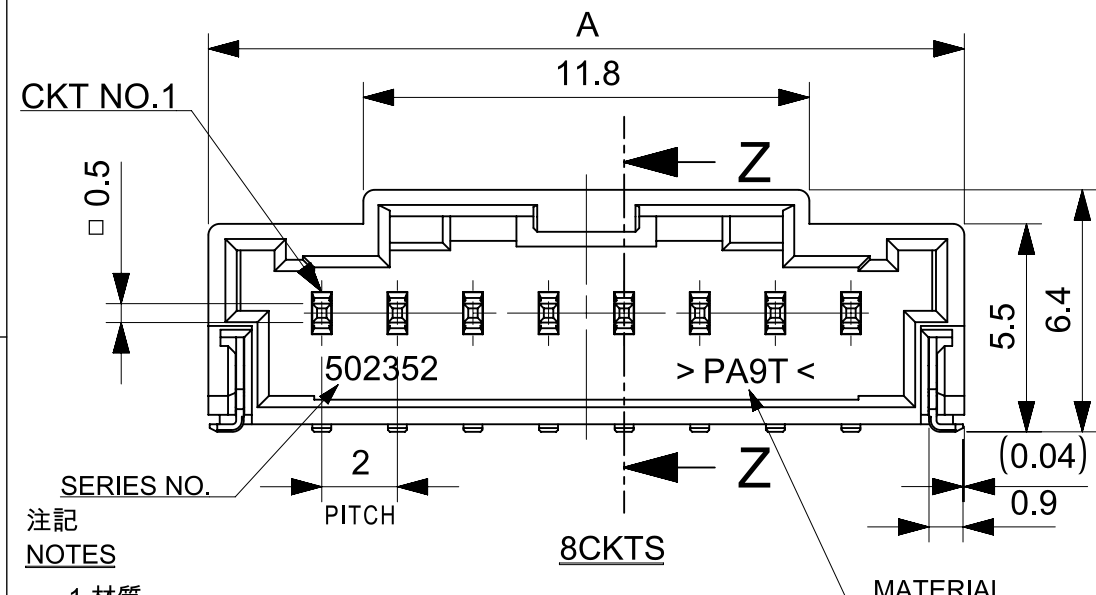
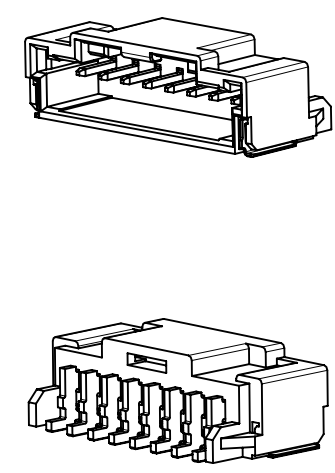
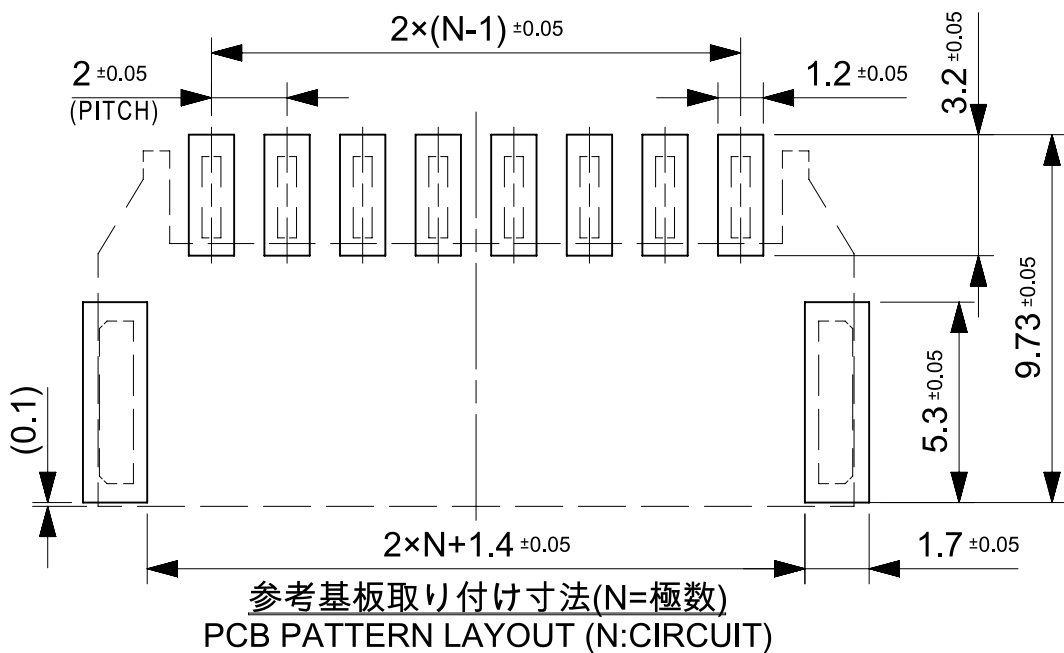


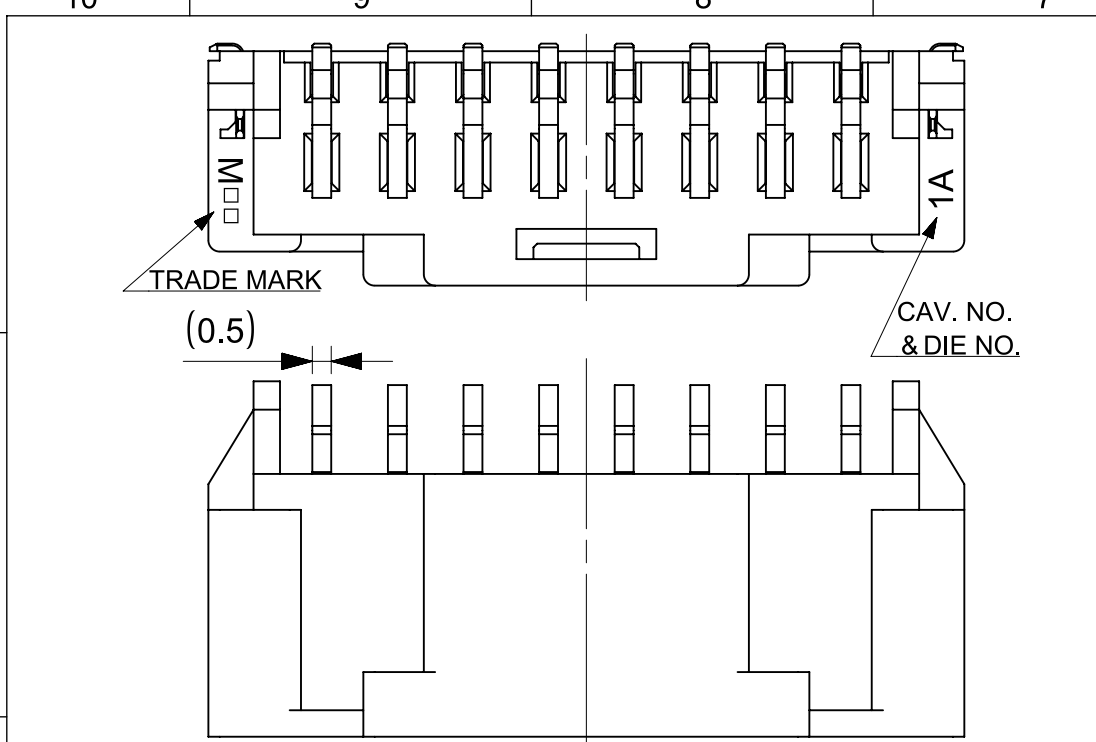

- 注記
NOTES
- 材質
ハウジング：耐熱性ナイロンUL94V-0
ピン：銅合金、ニッケル下地、錫メッキ、金メッキ
フィッティングネール：銅合金、ニッケル下地、錫メッキ
MATERIAL
HOUSING:POLYAMIDE UL94V-0
PIN: COPPER ALLOY, GOLD OR TIN OVER NICKEL PLATE.
FITTING NAIL: COPPER ALLOY, TIN OVER NICKEL PLATE.
 - 色：ナチュラル、黒、赤、青
COLOR:NATURAL, BLACK, RED, BLUE
 - 嵌合相手
ハウジング：502351-**0*
錫メッキ端子：50212-8*00,50372-8*00,560085-0101
金メッキ端子：56161-8*81
MATES WITH
HOUSING:502351-**0*
SN PLATING TERMINAL:50212-8*00,50372-8*00,560085-0101
AU PLATING TERMINAL:56161-8*81
 - エンボス梱包品の詳細はSD-502352-002参照
DETAILED TAPING PACKAGE, SEE SD-502352-002.
 - ELV及びRoHS適合
ELV AND RoHS COMPLIANT
 - 半田付け面のコプラナリティ：0.1mm MAX.
CO-PLANARITY OF SOLDERING TAILS TO BE 0.1mm MAX.
- 7.一般公差
GENERAL TOLERANCES
10 UNDER: ±0.2
10 OVER 30 UNDER: ±0.25
30 OVER: ±0.3
ANGULAR: ±3°

INITIAL REVISION:		
DRWN	SHSHIBATA	2007/12/18
CHECK	HKOMATSU	2007/12/18
APPR	AKANESHIGE	2007/12/18

FUNCTIONAL SYMBOLS FA = 0 FB = 0 FC = 0 DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
	DIMENSION UNITS		SCALE		CURRENT REV DESC: For fixing wrong view of 6ckt			molex 2.0MM PITCH W/B CONN. WAFER ASSY R/A SMT		
	mm		5:1							
	GENERAL TOLERANCES (UNLESS SPECIFIED)									
	ANGULAR TOL ± 0.5°									
	4 PLACES ±									
	3 PLACES ±		STATUS: Production DRWN: Hideo Yoneyama 2024-05-14 CHK'D: Hiromichi Komatsu 2024-05-16 APPR: Takashi Iida 2024-05-16			PRODUCT SALES DRAWING				
	2 PLACES ±					DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
	1 PLACE ±					SD-502352-001		PSD	001	L4
	0 PLACES ±					MATERIAL NUMBER		CUSTOMER		SHEET NUMBER
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION				DRAWING	SERIES	SEE CHART		GENERAL MARKET

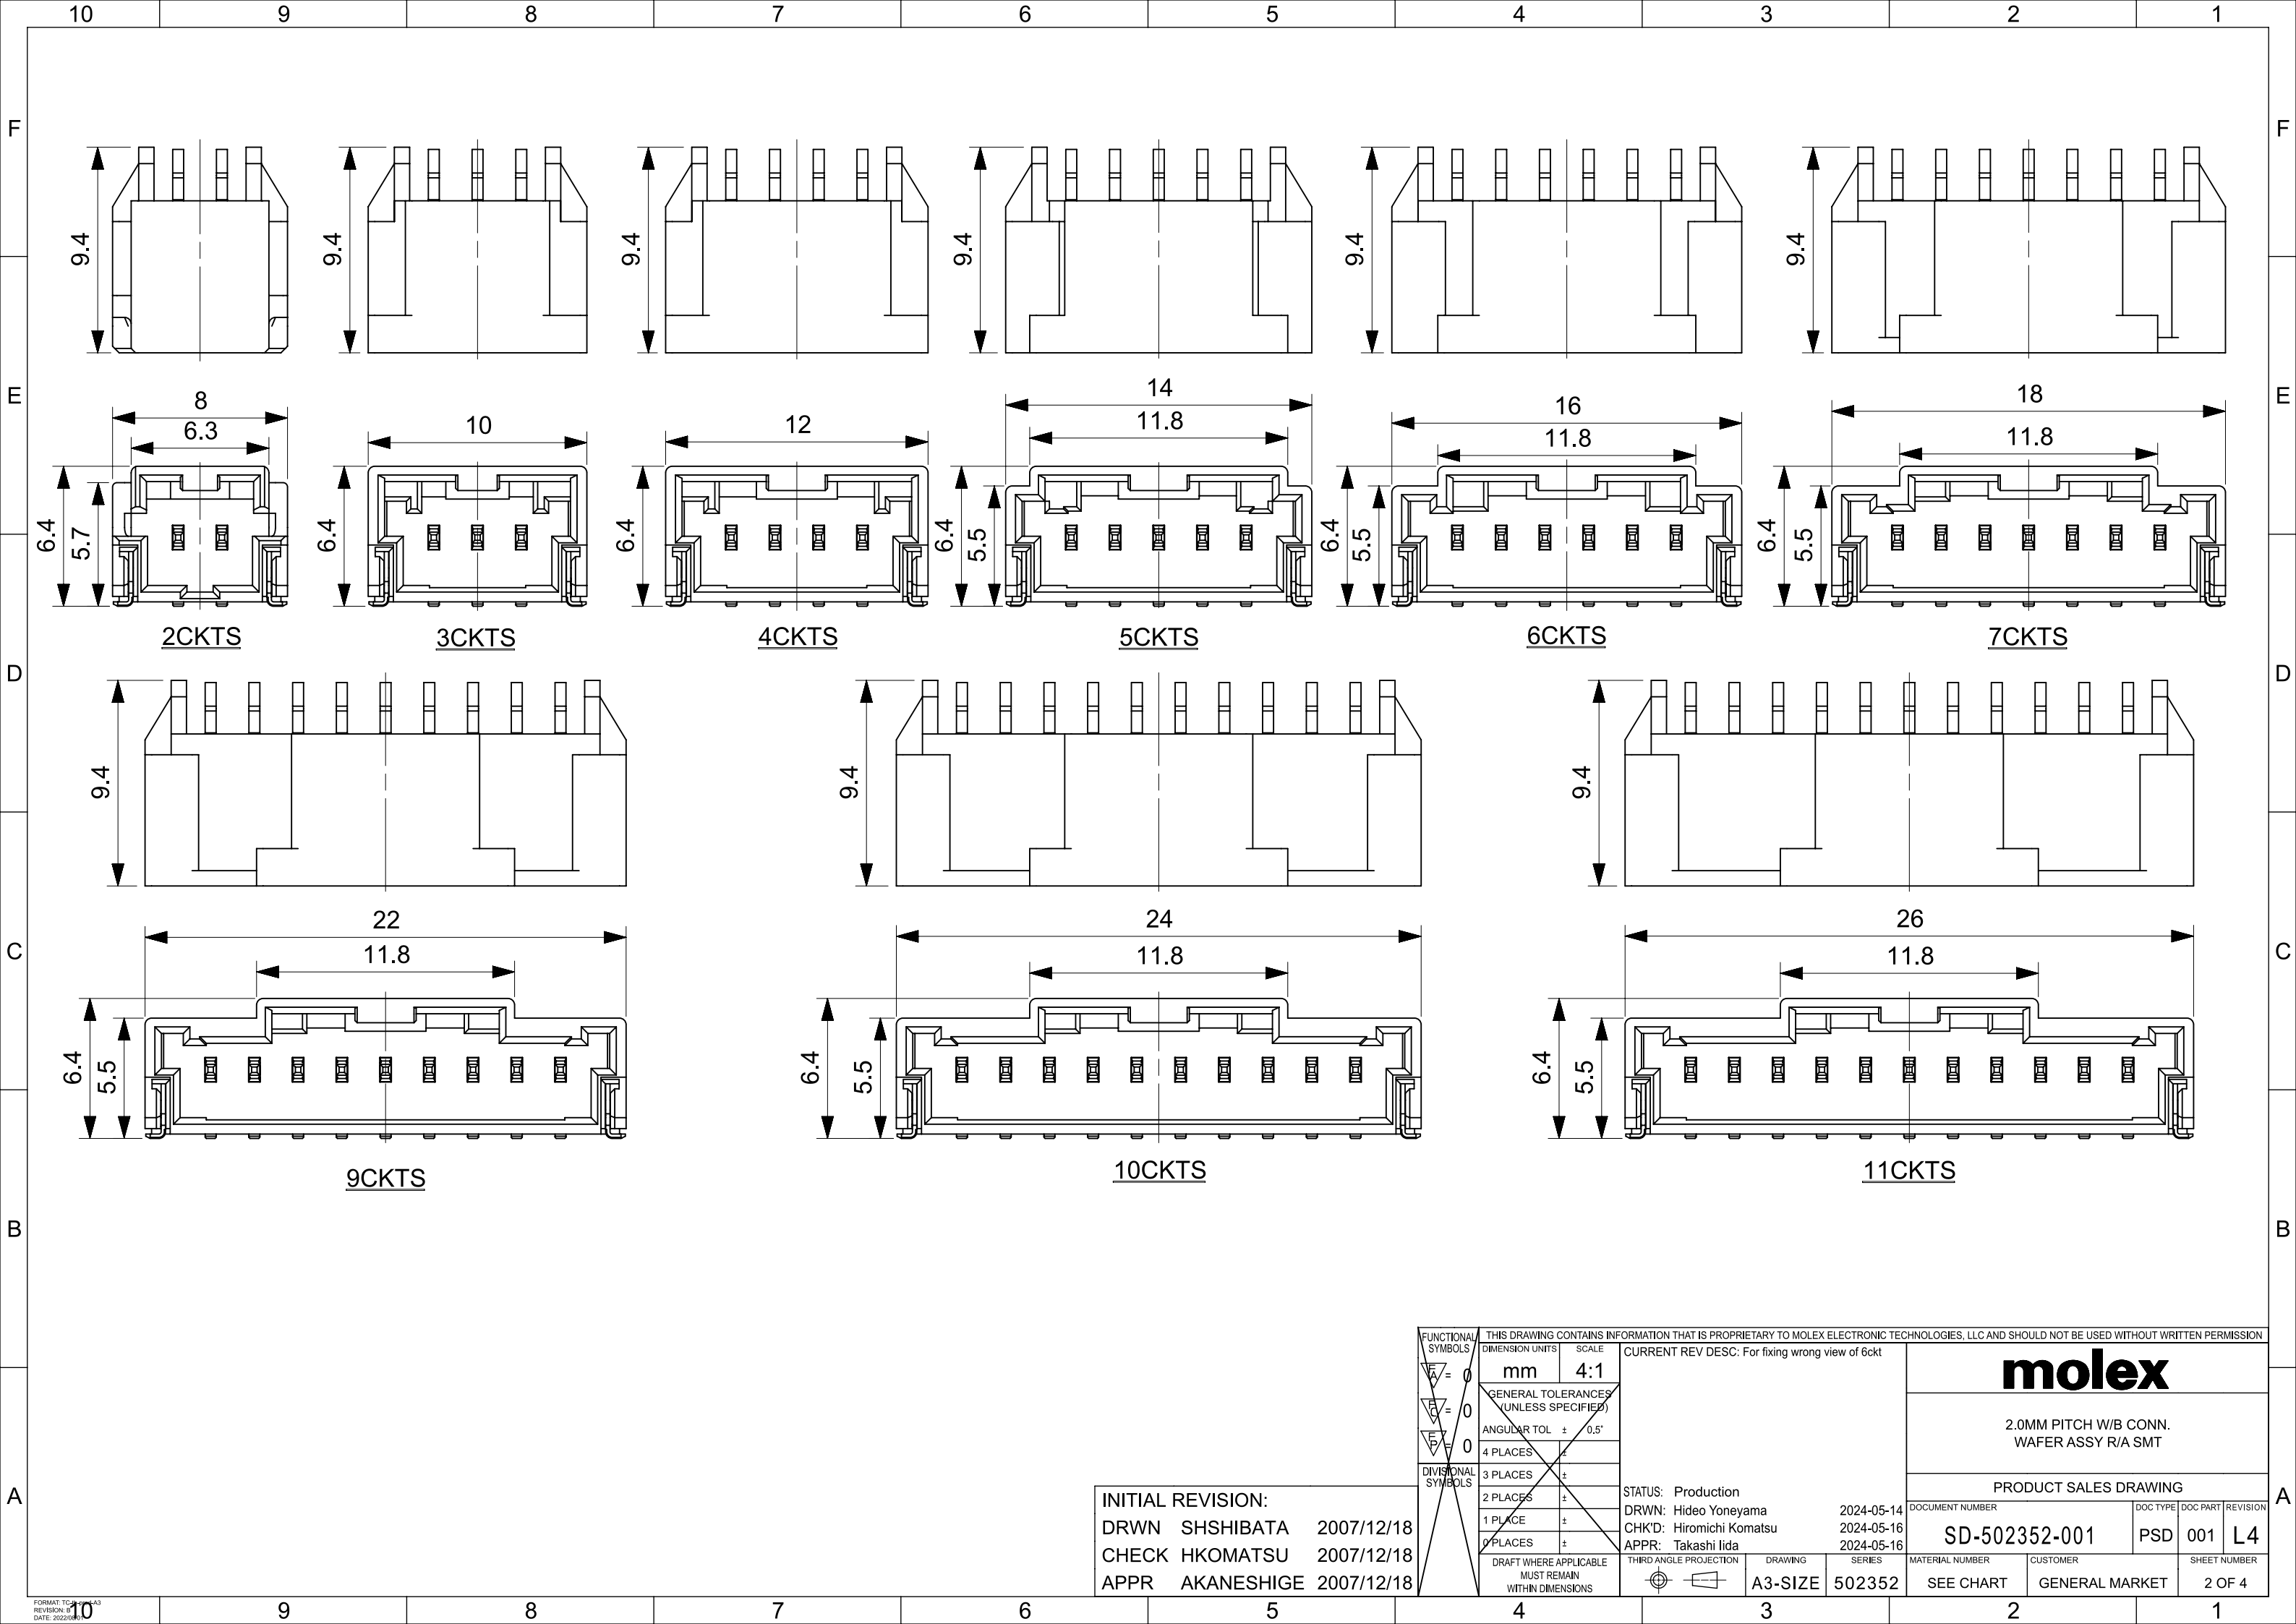

[illegible]

注記
NOTES

1. 製品番号

ナチュラル・錫めっき: 502352-**00

ナチュラル・金めっき: 502352-**10

黒・錫めっき: 502352-**01

赤・錫めっき: 502352-**02

青・錫めっき: 502352-**03

詳細寸法については、製品単体図面を参照下さい。

PART NO.

NATURAL Sn Plating: 502352-**00

NATURAL Au Plating: 502352-**10

BLACK Sn Plating: 502352-**01

RED Sn Plating: 502352-**02

BLUE Sn Plating: 502352-**03

SEE SALES DRAWING FOR CONNECTOR

2. 梱包数量: 700個/リール

NUMBER OF CONNECTORS 700PCS/REEL

3. リードテープ長さ

LEAD TAPE LENGHT

4. 材料

MATERIAL

キャリアテープ: ポリスチレン

CARRIER TAPE: POLYSTYRENE

トップテープ: PET, PE, PEF

TOP TAPE: PET, PE, PEF

リール: ポリスチレン

REEL: POLYSTYRENE

5. 一般公差


GENERAL TOLERANCES

10 UNDER: ± 0.2

10 OVER 30 UNDER: ± 0.25

30 OVER: ± 0.3

ANGULAR: $\pm 1^\circ$

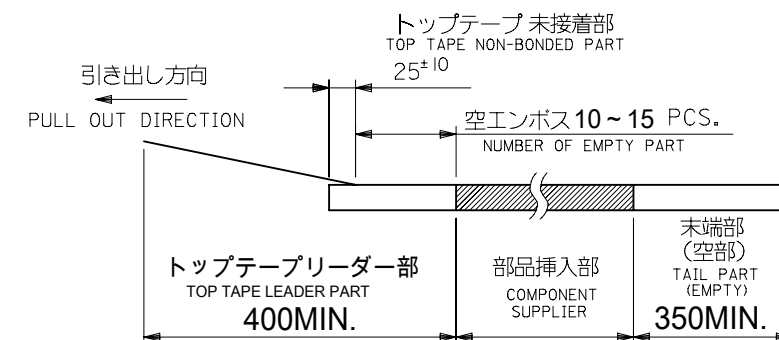

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex				
mm		NTS										
GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± ° 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ± DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				EC NO: 629663				2.0MM PITCH W/B CONN. WAFER ASSY EMBOSSED TAPE PACKAGE				
				DRWN: MSATO08		2019/12/26						
				CHK'D: HIJIMA		2019/12/27						
				APPR: TOSADA		2019/12/27		PRODUCT CUSTOMER DRAWING				
				INITIAL REVISION:								
				DRWN: SHSHIBATA		2007/06/19		DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
				APPR: AKANESHIGE		2007/06/19		SD-502352-002		PSD	001	K2
				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER
		A3-SIZE		502352		SEE CHART		GENERAL MARKET	1 OF 2			

