



Solid Polymer Electrochemical Gas Sensing Technology

ES4-NH₃-100-01 Ammonia Gas Sensor Datasheet



Easy Gas Sensor

ES4-NH₃-100 Ammonia



Part Number

01-ES4-NH₃-100-01

>>> Futures

- Extreme Linear Response Up to High Concentration
- Low Noise
- No Electrolyte Leakage
- Low Cost at Large Volumes
- Individually Calibrated Including Test Report

>>> Typical applications

- Smart Farm
- Emission Monitoring



>>> Technical Specifications

Performance

Sensitivity	20 nA/ppm ± 10nA/ppm	
Zero Current	± 2nA	
Range	0-100ppm	
Maximum Overload	200ppm	
Resolution (16Bit ADC)	0.1ppm	
Response Time	T50 < 100s; T90 < 300s	
Repeatability	1%	
Linear Range	100ppm	

Environment

Operating Temperature Range	-40 to +50℃
Operating Humidity Range	10-95%RH. Non-condensing
Operating Pressure Range	800 to 1200 hPa
Storage Temperature	0 to 20℃

Operation

Operating Principle	Amperometric, 3-electrode
Bias Voltage	0 mV
Recommended Load Resistor	100Ω
Warm Up Time	< 20s

Lifetime


Long-Term Drift	< 1 %/month
Expected Lifetime	> 3 years in air
Storage Life	6 months
Warranty	12 months


Housing


Housing Material	PPO
Weight	< 6g



Dimensions








>>> Cross Sensitivity

Gas	Formula	Test Concentration	Sensor Reading
Sulfur Dioxide	SO ₂	50ppm	0ppm
Carbon Monoxide	CO	50ppm	0ppm
Carbon Dioxide	CO ₂	1000ppm	0ppm
Chlorine	Cl ₂	10ppm	-1ppm
Hydrocarbons (unsaturated)	/	/	n.a
Hydrogen	H ₂	100ppm	0ppm
Hydrogen Cyanide	HCN	10ppm	< -5ppm
Isopropanol	C ₃ H ₇ OH	1000ppm	n.a
Nitric Oxide	NO	25ppm	< -3ppm
Nitrogen Dioxide	NO ₂	10ppm	-10ppm

Note

- 1) The avove interference factors may vary due to different sensors and service life, please refer to the actual test results.
- 2) This table is not complete for all cross gases, other gas please contact with us.

>>> Temperature Curve

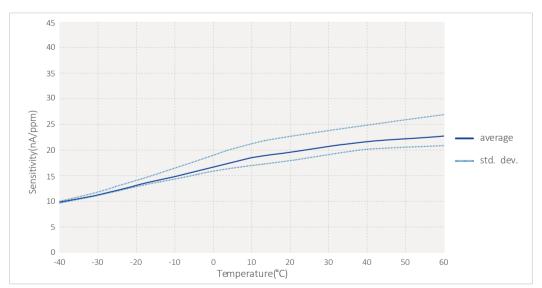

Note: The above parameters are the test results at a temperature of 25°C, a relative humidity of 50%RH and a normal pressure environment. The performance of the sensor is different under different environmental conditions. If you have any questions, please contact us.



Disclaimer

The EC Sense performance data stated above is based on data obtained under test conditions using the EC Sense gas distribution system and AQS test software. In the interest of continuous product improvement, EC Sense reserves the right to change design features and specifications without notice. We are not responsible for any loss, injury or damage caused by this. EC Sense assumes no responsibility for any indirect loss, injury or damage resulting from the use of this document, the information contained therein or any omissions or errors herein. This document does not constitute an offer to sell. The data it contains are for informational purposes only and cannot be considered a guarantee. Any use of the given data must be evaluated and determined by the user to comply with federal, state and local laws and regulations. All specifications outlined are subject to change without notice.

Warning

EC Sense sensors are designed for use in a variety of environmental conditions. However, due to the principles and characteristics of solid polymer electrochemical sensors and to ensure normal use, users must strictly follow this article during storage, assembly and operation of the module. General-purpose PCB circuit board application methods and illegal applications / violation of the application will not be covered by the warranty. Although our products are highly reliable, we recommend checking the module's response to the target gas prior to utilization to ensure on-site use. At the end of the products service life, please do not discard any electronics in the domestic waste, instead follow the local governments electronic waste recycling regulations for disposal.



Business Centre Europe and the rest of the world

EC Sense GmbH Wangener Weg 3 82069 Hohenschäftlarn, Germany Tel: +49(0)8178-99992-10 Fax: +49(0)8178-99992-11

Email: office@ecsense.com

www.ecsense.com www.ecnose.de

Business Centre

Ningbo AQSystems Technology Co., Ltd. F4-17 Building, Zhong Wu Technology Park No.228, Jin Gu Bei Road, Yinzhou District NingBo, Zhejiang Provence, P.R. China Post Code: 315100

Tel: +86(0)574 88097236, 88096372

Email: info@aqsystems.cn

www.ecsense.cn, www.ecnose.com