



Spec No. :DS35-2020-0100 Effective Date: 12/03/2020

Revision: -

LITE-ON DCC

RELEASE

BNS-OD-FC001/A4



1. Description

SMD LEDs from Lite-On are available in miniature sizes and special configurations for automated PC board assembly and space-sensitive applications. These SMD LEDs are suitable for use in a wide variety of electronic equipment, including cordless and cellular phones, notebook computers, network systems, home appliances, and indoor signboard applications.


1.1 Features

- Meet ROHS
- Package in 8mm tape on 7" diameter reels
- EIA STD package
- I.C. compatible
- Compatible with automatic placement equipment
- Compatible with infrared reflow solder process
- Preconditioning: accelerate to JEDEC level 3
- Built-in zener diode withstanding ESD voltage up to 8000V

1.2 Applications

- Telecommunication, Office automation, home appliances, industrial equipment
- Status indicator
- Signal and Symbol Luminary
- Front panel backlighting

2. Package Dimensions

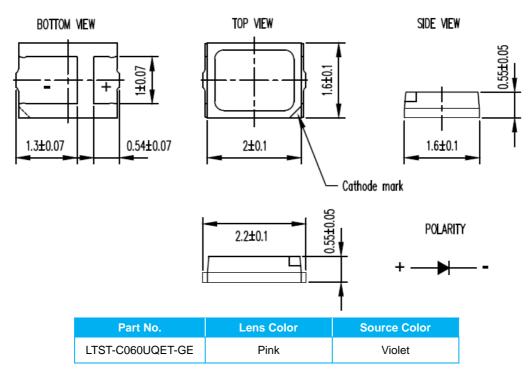

Notes:

- 1. All dimensions are in millimeters.
- 2. Tolerance is ±0.2 mm (.008") unless otherwise noted.




3. Rating and Characteristics

3.1 Absolute Maximum Ratings at Ta=25℃

Parameter Parameter	LTST-C060UQET-GE	Unit	
Power Dissipation	0.768	W	
Peak Forward Current (50ms:ON , 950ms: OFF , D=0.05)	500	mA	
DC Forward Current	240	mA	
Operating Temperature Range	-40℃ to + 85℃		
Storage Temperature Range	-40℃ to + 100℃		

3.2 Suggest IR Reflow Condition for Pb Free Process:

IR-Reflow Soldering Profile for lead free soldering (Acc. to J-STD-020B)

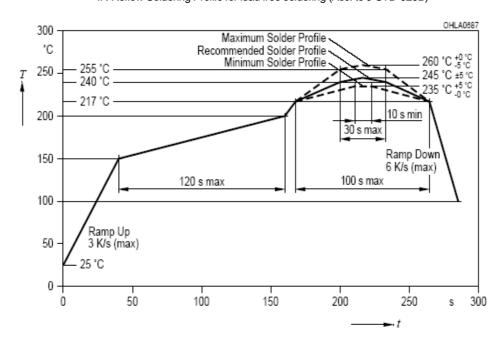



3.3 Electrical / Optical Characteristics at Ta=25℃

Deventor	Cumbal	LTST-C060UQET-GE				Test
Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	ensity IV 710 - 1400		mcd	d IF = 20mA Note 1		
Viewing Angle	2 θ _{1/2}	-	120	- deg		Note 2 (Fig.5)
Chromoticity Coordinates	х	-	0.255	-		IF = 20mA
Chromaticity Coordinates	у	-	0.105	-	-	Note 3
Forward Voltage	VF	2.4	-	3.2	V IF = 20mA Note 4	
Reverse Current	IR	-	-	10	μΑ	VR = 5V Note 5

Notes:

- Luminous intensity is measured with a light sensor and filter combination that approximates the CIE
 eye-response curve.
- 2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3. The chromaticity coordinates (x , y) is derived from the 1931 CIE chromaticity diagram.
- 4. Forward Voltage Tolerance is +/- 0.1 volt.
- 5. Reverse voltage (VR) condition is applied to IR test only. The device is not designed for reverse operation.



4. Bin Rank

4.1 VF Rank

Forward	l Voltage Unit : V	@20mA
Bin Code	Bin Code	Bin Code
F5	2.4	2.6
F6	2.6	2.8
F7	2.8	3.0
F8	3.0	3.2

Tolerance on each Forward Voltage bin is +/-0.1 volt

4.2 IV Rank

Luminous	Intensity Unit : mo	Unit : mcd @20mA		
Bin Code	Bin Code	Bin Code		
U2	710	900		
V1	900	1120		
V2	1120	1400		

Tolerance on each Intensity bin is +/-11%




4.3 Category Code Table

Color Bin Table					Test	@2	0mA				
Bin Code	Color Bin Limits					Bin Code	Color Bin Limits				
Bill Code	CIE-	Point1	Point2	Point3	Point4	Bill Code	CIE-	Point1	Point2	Point3	Point4
DO.	х	0.2360	0.2482	0.2482	0.2360	B5 -	х	0.2604	0.2726	0.2726	0.2604
В3	у	0.0680	0.0760	0.1130	0.1050		у	0.0840	0.0920	0.1290	0.1210
B4	х	0.2482	0.2604	0.2604	0.2482		-	-	-	-	-
	у	0.0760	0.0840	0.1210	0.1130		-	-	-	-	-

Tolerance on each Hue bin (x, y) bin is \pm -0.01.

4.4 Chromaticity Coordinate

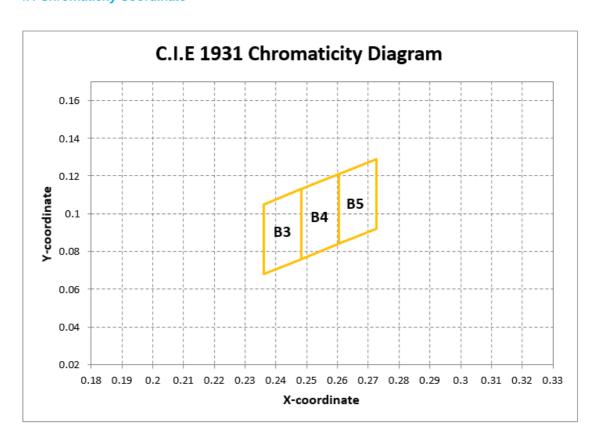



5. Typical Electrical / Optical Characteristics Curves.

(25℃ Ambient Temperature Unless Otherwise Noted)

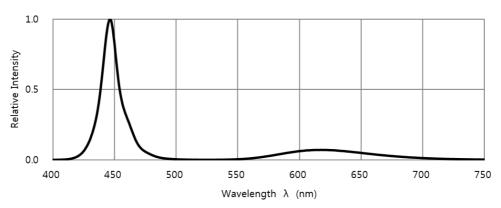



Fig. 1 RELATIVE INTENSITY VS. WAVELENGTH






Fig. 3 FORWARD CURRENT VS. DERATING CURVE




Fig. 4 RELATIVE LUMIOUS INTENSITY VS. FORWARD CURRENT




Fig. 5 Spatial Distribution



6. User Guide


6.1 Cleaning

Do not use unspecified chemical liquid to clean LED they could harm the package. If cleaning is necessary, immerse the LED in ethyl alcohol or isopropyl alcohol at normal temperature for less one minute.

6.2 Recommend Printed Circuit Board Attachment Pad

Infrared / vapor phase

Reflow Soldering





Notes:

1. Suggest stencil thickness is maximum 0.10mm.



6.3 Package Dimensions of Tape And Reel

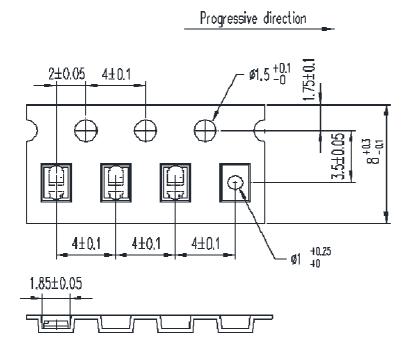




Note:

- 1. Drawings not to scale.
- 2. All dimensions are in millimeters.
- 3. All dimensions without tolerances are for reference only.



6.4 Package Dimensions of Reel

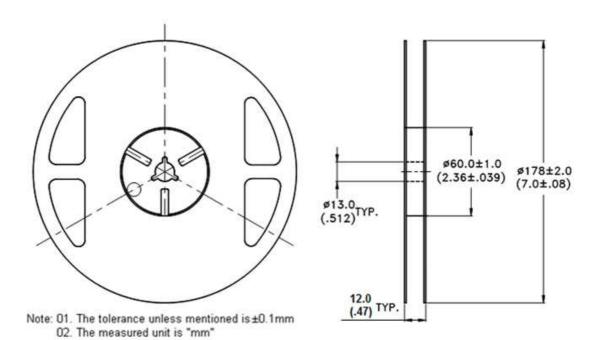

Notes:

- 1. Drawings not to scale.
- 2. All dimensions are in millimeters.
- 3. All dimensions without tolerances are for reference only.
- 4. Minimum package quantity is 500 pieces for remainders.
- 5. 7 inch reel-3000 pieces.
- 6. Empty component pockets sealed with top cover tape.
- 7. The maximum number of consecutive missing lamps is two
- 8. In accordance with EIA-481 specifications



7. Cautions

7.1 Application

The LEDs described here are intended to be used for ordinary electronic equipment (such as office equipment, communication equipment and household applications). Consult Liteon's Sales in advance for information on applications in which exceptional reliability is required, particularly when the failure or malfunction of the LEDs may directly jeopardize life or health (such as in aviation, transportation, traffic control equipment, medical and life support systems and safety devices).

7.2 Storage

The package is sealed:

The LEDs should be stored at 30℃ or less and 70%RH or less. And the LEDs are limited to use within one year, while the LEDs is packed in moisture-proof package with the desiccants inside.

The package is opened:

The storage ambient for the LEDs should not exceed 30°C temperature and 60% relative humidity.

It is recommended that LEDs out of their original packaging are IR-reflowed within 168hrs.

For extended storage out of their original packaging, it is recommended that the LEDs be stored in a sealed container with appropriate desiccant, or in a desiccators with nitrogen ambient.

LEDs stored out of their original packaging for more than 168hrs should be baked at about 60 $^{\circ}$ C for at least 48 hours before solder assembly.

7.3 Cleaning

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED if necessary.

7.4 Soldering

Recommended soldering conditions:

Refle	w soldering	Soldering iron			
Pre-heat	150~200℃	Temperature	300℃ Max.		
Pre-heat time 120 sec. Max.		Soldering time	3 sec. Max.		
Peak temperature 260℃ Max.			(one time only)		
Soldering time	10 sec. Max.(Max. two times)				

Notes:

Because different board designs use different number and types of devices, solder pastes, reflow ovens, and circuit boards, no single temperature profile works for all possible combinations.

However, you can successfully mount your packages to the PCB by following the proper guidelines and PCB-specific characterization.

LITE-ON Runs both component-level verification using in-house **KYRAMX98** reflow chambers and board-level assembly. The results of this testing are verified through post-reflow reliability testing. Profiles used at LITE-ON are based on JEDEC standards to ensure that all packages can be successfully and reliably surface mounted.

Figure on page3 shows a sample temperature profile compliant to JEDEC standards. You can use this example as a generic target to set up your reflow process. You should adhere to the JEDEC profile limits as well as specifications and recommendations from the solder paste manufacturer to avoid damaging the device and create a reliable solder joint.





7.5 Drive Method

A LED is a current-operated device. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended that a current limiting resistor be incorporated in the drive circuit, in series with each LED as shown in Circuit A below.

Circuit model A

Circuit model B





- (A) Recommended circuit.
- (B) The brightness of each LED might appear different due to the differences in the I-V characteristics of those LEDs.

7.6 ESD (Electrostatic Discharge)

Static Electricity or power surge will damage the LED.

Suggestions to prevent ESD damage:

- Use of a conductive wrist band or anti-electrostatic glove when handling these LEDs.
- All devices, equipment, and machinery must be properly grounded.
- Work tables, storage racks, etc. should be properly grounded.
- Use ion blower to neutralize the static charge which might have built up on surface of the LED's plastic lens as a result of friction between LEDs during storage and handling.

ESD-damaged LEDs will exhibit abnormal characteristics such as high reverse leakage current, low forward voltage, or "no lightup" at low currents.

To verify for ESD damage, check for " lightup " and Vf of the suspect LEDs at low currents.

The Vf of "good" LEDs should be >2.0V@0.1mA for InGaN product and >1.4V@0.1mA for AllnGaP product.



8. Reliability Test

No.	Test item	Test condition	Reference standard
1	Resistance to soldering heat	Tsld = 260℃, 10sec. 3 times	JEITA ED-4701 300 301
2	Solderability	Tsld=245± 5℃ (Lead Free Solder, Coverage ≧ 95% of the dipped surface)	JEITA ED-4701 300 303
3	Thermal Shock	85 ± 5℃ ~ -30℃ ± 5℃ 30min 30min 100cycles	JEITA ED-4701 300 307
4	Temperature Cycle	-55℃ ~ 25℃ ~ 100℃ ~ 25℃ 30min 5min 30min 5min 100cycles	JEITA ED-4701 100 105
5	High Temperature Storage	100℃ 1000hrs	JEITA ED- 4701 200 201
6	Low Temperature Storage	-55℃ 1000hrs	JEITA ED-4 701 200 202
7	Temperature Humidity Storage	60℃/90%RH 300hrs	JEIT A ED-4701 100 103
8	Room temp life test	25℃, IF: Typical current , 100 0hrs	

9. Others

The appearance and specifications of the product may be modified for improvement without prior notice.



10. Suggested Checking List

Training and Certification

- 1. Everyone working in a static-safe area is ESD-certified?
- 2. Training records kept and re-certification dates monitored?

Static-Safe Workstation & Work Areas

- 1. Static-safe workstation or work-areas have ESD signs?
- 2. All surfaces and objects at all static-safe workstation and within 1 ft measure less than 100V?
- 3. All ionizer activated, positioned towards the units?
- 4. Each work surface mats grounding is good?

Personnel Grounding

- 1. Every person (including visitors) handling ESD sensitive (ESDS) items wears wrist strap, heel strap or conductive shoes with conductive flooring?
- 2. If conductive footwear used, conductive flooring also present where operator stand or walk?
- 3. Garments, hairs or anything closer than 1 ft to ESD items measure less than 100V*?
- 4. Every wrist strap or heel strap/conductive shoes checked daily and result recorded for all DLs?
- 5. All wrist strap or heel strap checkers calibration up to date?

Note: *50V for InGaN LED.

Device Handling

- 1. Every ESDS items identified by EIA-471 labels on item or packaging?
- 2. All ESDS items completely inside properly closed static-shielding containers when not at static-safe workstation?
- 3. No static charge generators (e.g. plastics) inside shielding containers with ESDS items?
- 4. All flexible conductive and dissipative package materials inspected before reuse or recycles?

Others

- 1. Audit result reported to entity ESD control coordinator?
- 2. Corrective action from previous audits completed?
- 3. Are audit records complete and on file?

Part No. : LTST-C060UQET-GI BNS-OD-FC002/A4