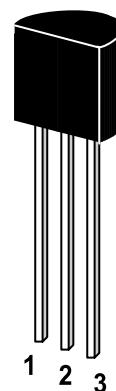


NPN Silicon Epitaxial Planar Transistor

for high voltage switching and amplifier applications.

The transistor is subdivided into one group according to its DC current gain. As complementary type the PNP transistor MPSA 92 and MPSA 93 is recommended.

On special request, these transistors can be manufactured in different pin configurations.



1. Emitter 2. Base 3. Collector

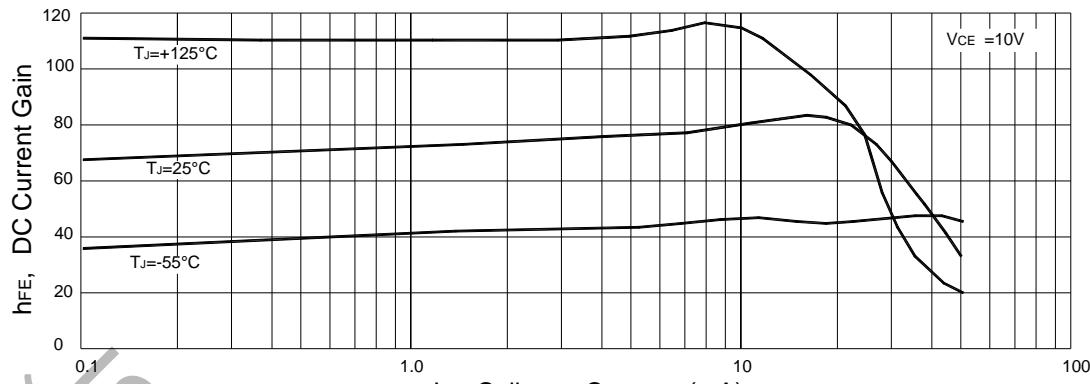
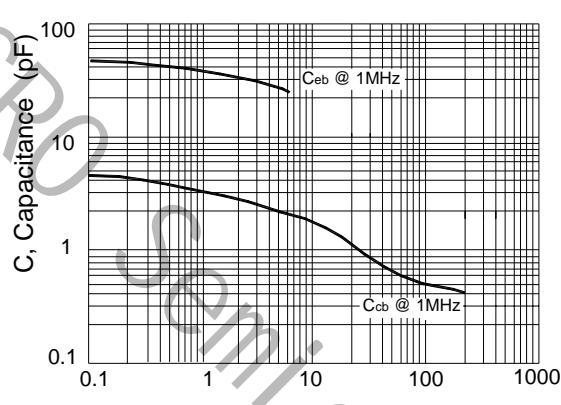
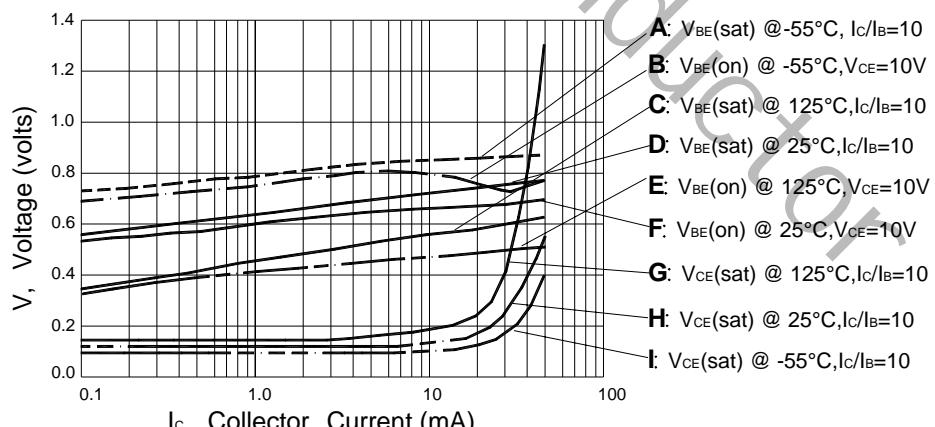
 TO-92 Plastic Package
 Weight approx. 0.19g

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

	Symbol	Value		Unit
		MPSA 42	MPSA 43	
Collector Base Voltage	V_{CBO}	300	200	V
Collector Emitter Voltage	V_{CEO}	300	200	V
Emitter Base Voltage	V_{EBO}	6		V
Collector Current	I_C	500		mA
Total Device Dissipation @ $T_a=25^\circ\text{C}$	P_{tot}	625		mW
Derate above 25°C		5.0		$\text{mW}/^\circ\text{C}$
Total Device Dissipation @ $T_c=25^\circ\text{C}$	P_{tot}	1.5		W
Derate above 25°C		12		$\text{mW}/^\circ\text{C}$
Junction Temperature	T_j	150		$^\circ\text{C}$
Storage Temperature Range	T_s	-55 to +150		$^\circ\text{C}$

Characteristics at $T_{amb}=25\text{ }^{\circ}\text{C}$

	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $I_C=1\text{mA}, V_{CE}=10\text{V}$ at $I_C=10\text{mA}, V_{CE}=10\text{V}$ at $I_C=30\text{mA}, V_{CE}=10\text{V}$	h_{FE} h_{FE} h_{FE}	25 40 40	- - -	- - -	- - -
Emitter Cutoff Current at $V_{EB}=6\text{V}$ $V_{EB}=4\text{V}$	I_{EBO} I_{EBO}	- -	- -	0.1 0.1	μA μA
Collector Cutoff Current at $V_{CB}=200\text{V}$ $V_{CB}=160\text{V}$	I_{CBO} I_{CBO}	- -	- -	0.1 0.1	μA μA
Collector Base Breakdown Voltage at $I_C=100\mu\text{A}$	$V_{(BR)CBO}$ $V_{(BR)CBO}$	300 200	- -	- -	V V
Collector Emitter Breakdown Voltage at $I_C=1\text{mA}$	$V_{(BR)CEO}$ $V_{(BR)CEO}$	300 200	- -	- -	V V
Emitter Base Breakdown Voltage at $I_E=100\mu\text{A}$	$V_{(BR)EBO}$	6	-	-	V
Collector Saturation Voltage at $I_C=20\text{mA}, I_B=2\text{mA}$	$V_{CE(\text{sat})}$	-	-	0.5	V
Base Saturation Voltage at $I_C=20\text{mA}, I_B=2\text{mA}$	$V_{BE(\text{sat})}$	-	-	0.9	V
Gain Bandwidth Product at $I_C=10\text{mA}, V_{CE}=20\text{V}, f=100\text{MHz}$	f_T	50	-	-	MHz
Collector Output Capacitance at $V_{CB}=20\text{V}, f=1\text{MHz}$	C_{ob} C_{ob}	- -	- -	3 4	pF pF


Figure 1. DC Current Gain

Figure 2. Capacitance

Figure 3. "on" Voltages