

TP65H050G4BS

650V SuperGaN® FET in TO-263 (source tab)

Description

The TP65H050G4BS 650V, 50 mΩ gallium nitride (GaN) FET is a normally-off device using Renesas's Gen IV platform. It combines a state-of-the-art high voltage GaN HEMT with a low voltage silicon MOSFET to offer superior reliability and performance.

The Gen IV SuperGaN® platform uses advanced epi and patented design technologies to simplify manufacturability while improving efficiency over silicon via lower gate charge, output capacitance, crossover loss, and reverse recovery charge.


Related Literature

- [Recommended External Circuitry for GaN FETs](#)
- [Printed Circuit Board Layout and Probing](#)


Ordering Information

Part Number	Package	Package Configuration
TP65H050G4BS	TO-263	Source Tab

TP65H050G4BS
TO-263
(top view)



Cascode Schematic Symbol



Cascode Device Structure

Features

- JEDEC qualified GaN technology
- Dynamic $R_{DS(on)eff}$ production tested
- Robust design, defined by
 - Wide gate safety margin
 - Transient over-voltage capability
- Enhanced inrush current capability
- Very low Q_{RR}
- Reduced crossover loss

Benefits

- Enables AC-DC bridgeless totem-pole PFC designs
 - Increased power density
 - Reduced system size and weight
 - Overall lower system cost
- Achieves increased efficiency in both hard- and soft-switched circuits
- Easy to drive with commonly-used gate drivers
- GSD pin layout improves high speed design

Applications

- Datacom
- Broad industrial
- PV inverter
- Servo motor



Key Specifications

V_{DSS} (V)	650
$V_{DSS(TR)}$ (V)	800
$R_{DS(on)eff}$ (mΩ) max*	60
Q_{RR} (nC) typ	120
Q_G (nC) typ	16

* Dynamic on-resistance; see Figures 18 and 19

Absolute Maximum Ratings ($T_c=25^\circ\text{C}$ unless otherwise stated.)

Symbol	Parameter		Limit Value	Unit
V_{DSS}	Drain to source voltage ($T_J = -55^\circ\text{C}$ to 150°C)		650	V
$V_{DSS(TR)}$	Transient drain to source voltage ^a		800	
V_{GSS}	Gate to source voltage		± 20	
P_D	Maximum power dissipation @ $T_c=25^\circ\text{C}$		119	W
I_D	Continuous drain current @ $T_c=25^\circ\text{C}$ ^b		34	A
	Continuous drain current @ $T_c=100^\circ\text{C}$ ^b		22	A
I_{DM}	Pulsed drain current (pulse width: 10 μs)		150	A
T_c	Operating temperature	Case	-55 to +150	$^\circ\text{C}$
T_J		Junction	-55 to +150	$^\circ\text{C}$
T_s	Storage temperature		-55 to +150	$^\circ\text{C}$
T_{SOLD}	Soldering peak temperature ^c		260	$^\circ\text{C}$


Notes:

- a. In off-state, spike duty cycle $D < 0.01$, spike duration $< 30\mu\text{s}$, non repetitive
b. For increased stability at high current operation, see Circuit Implementation on page 3
c. Reflow MSL3

Thermal Resistance

Symbol	Parameter	Typical	Unit
$R_{\theta JC}$	Junction-to-case	1.05	$^\circ\text{C/W}$
$R_{\theta JA}$	Junction-to-ambient	40	$^\circ\text{C/W}$

Circuit Implementation

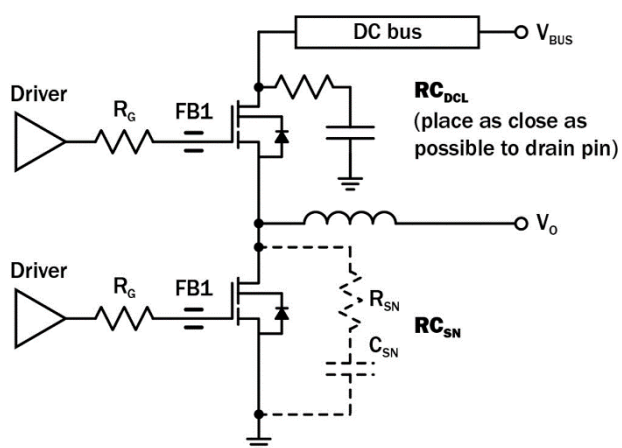

Simplified Half-bridge Schematic (See also on Figure 14)

For additional gate driver options/configurations, please see Application Note [Recommended External Circuitry for GaN FETs](#)

Layout Recommendations

Gate Loop:

- Gate Driver: SiLab Si823x/Si827x
- Keep gate loop compact

Power loop: (For reference see page 13)

- Minimize power loop path inductance
- Minimize switching node coupling with high and low power plane
- Add DC bus snubber to reduce to voltage ringing
- Add Switching node snubber for high current operation

Recommended gate drive: (0V, 12V) with $R_G = 30\Omega$

Gate Ferrite Bead (FB1)	Required DC Link RC Snubber (RC_{DCL}) ^a	Recommended Switching Node RC Snubber (RC_{SN}) ^b
200 – 300 Ω at 100MHz	[4.7nF + 8 Ω] x 2	Not necessary ^b

Notes:

- RC_{DCL} should be placed as close as possible to the drain pin
- RC_{SN} (200pF + 5 Ω) is needed only if R_G is smaller than recommendations

Electrical Parameters ($T_J=25^\circ\text{C}$ unless otherwise stated)

Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
Forward Device Characteristics						
$V_{DS(BL)}$	Drain-source voltage	650	—	—	V	$V_{GS}=0V$
$V_{GS(th)}$	Gate threshold voltage	3.3	4	4.8	V	$V_{DS}=V_{GS}$, $I_D=0.7\text{mA}$
$\Delta V_{GS(th)}/T_J$	Gate threshold voltage temperature coefficient	—	-6.2	—	mV/ $^\circ\text{C}$	
$R_{DS(on)eff}$	Drain-source on-resistance ^a	—	50	60	m Ω	$V_{GS}=10V$, $I_D=22A$
		—	105	—		$V_{GS}=10V$, $I_D=22A$, $T_J=150^\circ\text{C}$
I_{DSS}	Drain-to-source leakage current	—	4	40	μA	$V_{DS}=650V$, $V_{GS}=0V$
		—	15	—		$V_{DS}=650V$, $V_{GS}=0V$, $T_J=150^\circ\text{C}$
I_{GSS}	Gate-to-source forward leakage current	—	—	100	nA	$V_{GS}=20V$
		—	—	-100		$V_{GS}=-20V$
C_{iss}	Input capacitance	—	1000	—	pF	$V_{GS}=0V$, $V_{DS}=400V$, $f=1\text{MHz}$
C_{oss}	Output capacitance	—	110	—		
C_{RSS}	Reverse transfer capacitance	—	6	—		
$C_{O(er)}$	Output capacitance, energy related ^b	—	164	—	pF	$V_{GS}=0V$, $V_{DS}=0V$ to $400V$
$C_{O(tr)}$	Output capacitance, time related ^c	—	280	—		
Q_G	Total gate charge	—	16	24	nC	$V_{DS}=400V$, $V_{GS}=0V$ to $10V$, $I_D=22A$
Q_{GS}	Gate-source charge	—	6	—		
Q_{GD}	Gate-drain charge	—	5	—		
Q_{OSS}	Output charge	—	120	—	nC	$V_{GS}=0V$, $V_{DS}=0V$ to $400V$
$t_{D(on)}$	Turn-on delay	—	49.2	—	ns	$V_{DS}=400V$, $V_{GS}=0V$ to $10V$, $I_D=22A$, $R_g=45\Omega$, $Z_{FB}=240\Omega$ at 100MHz (See Figure 14)
t_R	Rise time	—	11.3	—		
$t_{D(off)}$	Turn-off delay	—	88.3	—		
t_F	Fall time	—	10.9	—		

Notes:

- a. Dynamic on-resistance; see Figures 17 and 18 for test circuit and conditions
b. Equivalent capacitance to give same stored energy as V_{DS} rises from $0V$ to $400V$
c. Equivalent capacitance to give same charging time as V_{DS} rises from $0V$ to $400V$

Electrical Parameters ($T_J=25^\circ\text{C}$ unless otherwise stated)

Symbol	Parameter	Min	Typ	Max	Unit	Test Conditions
Reverse Device Characteristics						
I_S	Reverse current	—	—	22	A	$V_{GS}=0V$, $T_C=100^\circ\text{C}$, $\leq 25\%$ duty cycle
V_{SD}	Reverse voltage ^a	—	2.2	2.6	V	$V_{GS}=0V$, $I_S=22A$
		—	1.6	1.9		$V_{GS}=0V$, $I_S=11A$
t_{RR}	Reverse recovery time	—	50	—	ns	$I_S=22A$, $V_{DD}=400V$
Q_{RR}	Reverse recovery charge	—	120	—	nC	
$(di/dt)_{RM}$	Reverse diode di/dt ^b	—	—	2500	A/ μs	Circuit implementation and parameters on page 3

Notes:

a. Includes dynamic $R_{DS(on)}$ effectb. Reverse conduction di/dt will not exceed this max value with recommended $R_{\theta JA}$.

Typical Characteristics ($T_c=25^{\circ}\text{C}$ unless otherwise stated)

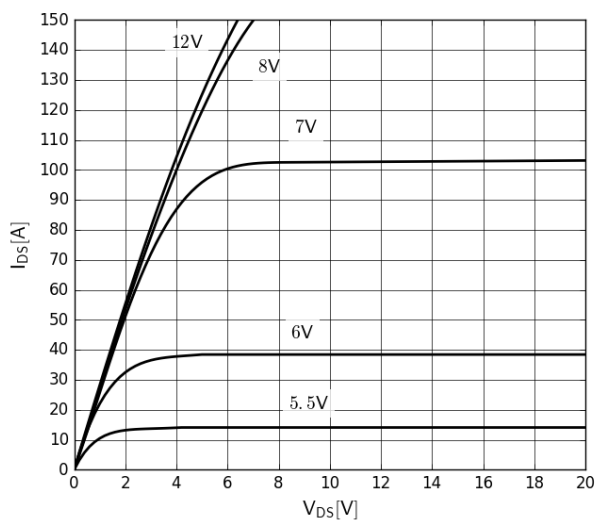


Figure 1. Typical Output Characteristics $T_J=25^{\circ}\text{C}$
Parameter: V_{GS}

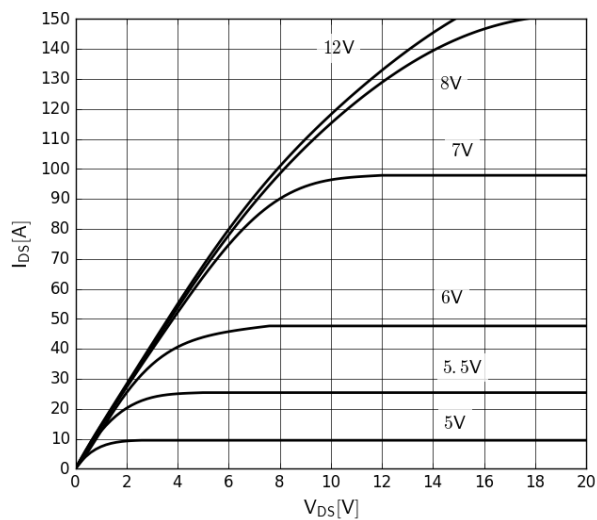


Figure 2. Typical Output Characteristics $T_J=150^{\circ}\text{C}$
Parameter: V_{GS}

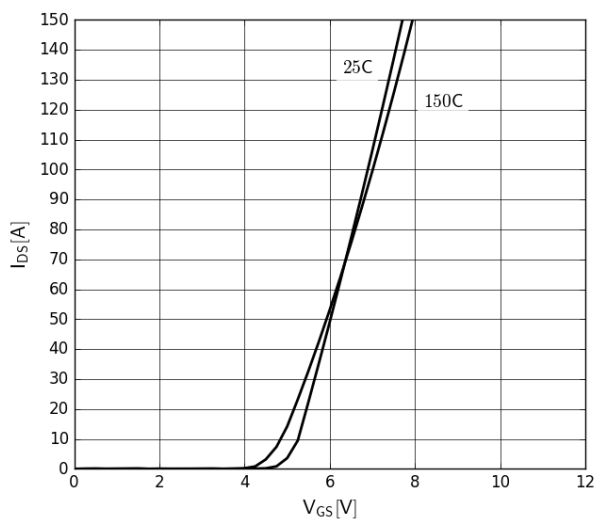


Figure 3. Typical Transfer Characteristics
 $V_{DS}=20\text{V}$, parameter: T_J

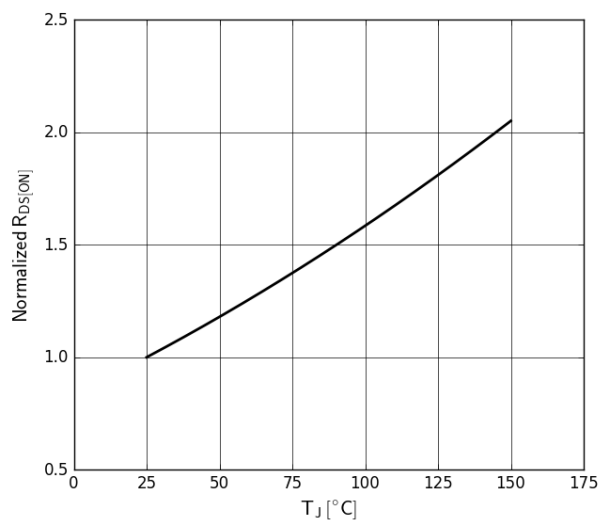


Figure 4. Normalized On-resistance
 $I_D=30\text{A}$, $V_{GS}=8\text{V}$

Typical Characteristics ($T_c=25^\circ\text{C}$ unless otherwise stated)

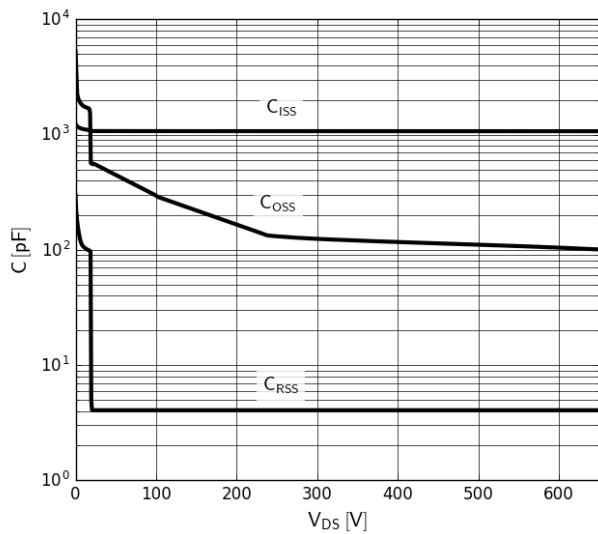


Figure 5. Typical Capacitance

$V_{GS}=0V$, $f=1MHz$

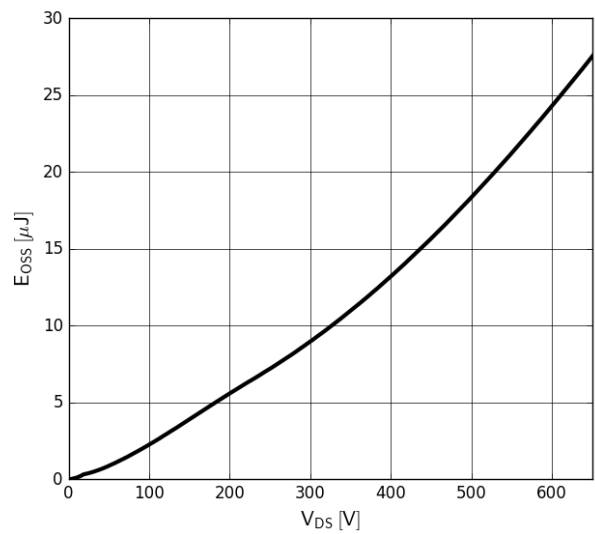


Figure 6. Typical C_{OSS} Stored Energy

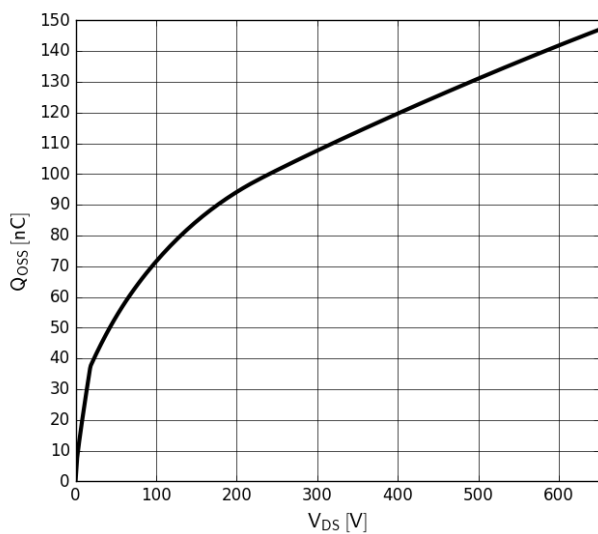


Figure 7. Typical Q_{OSS}

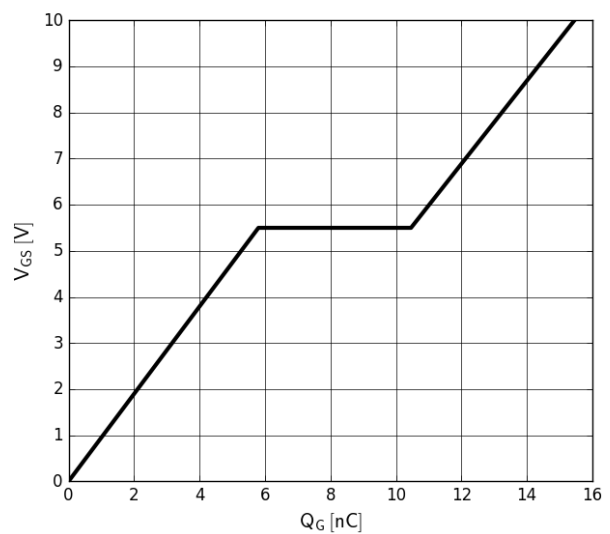
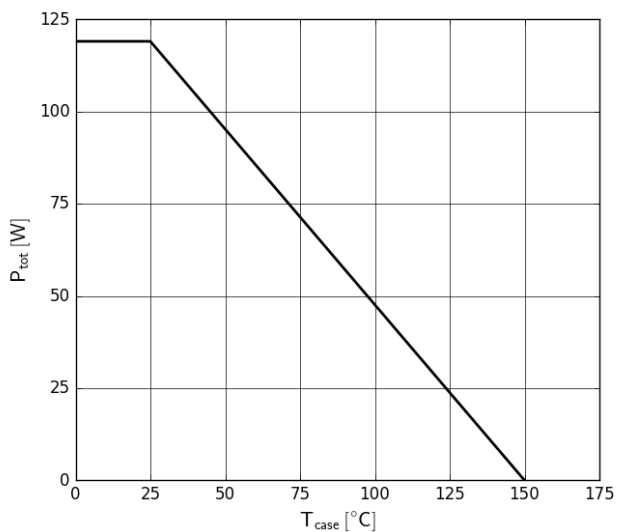
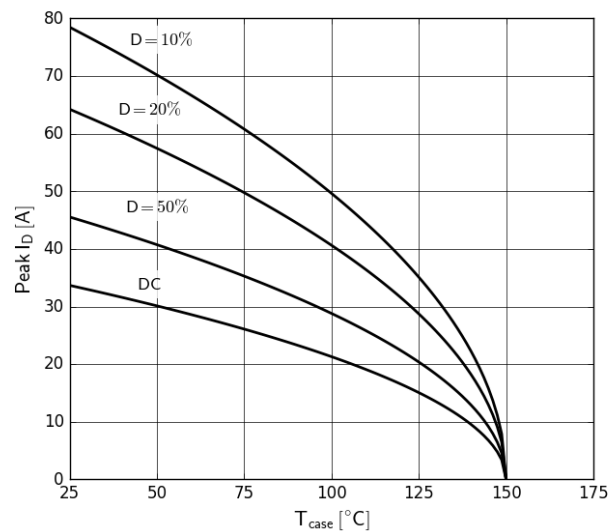
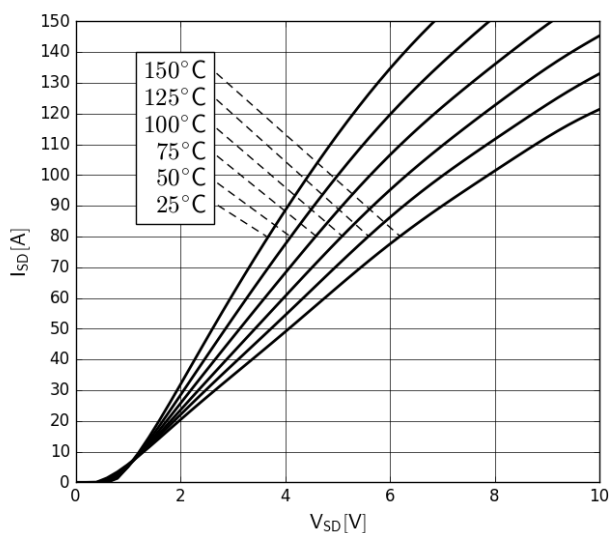
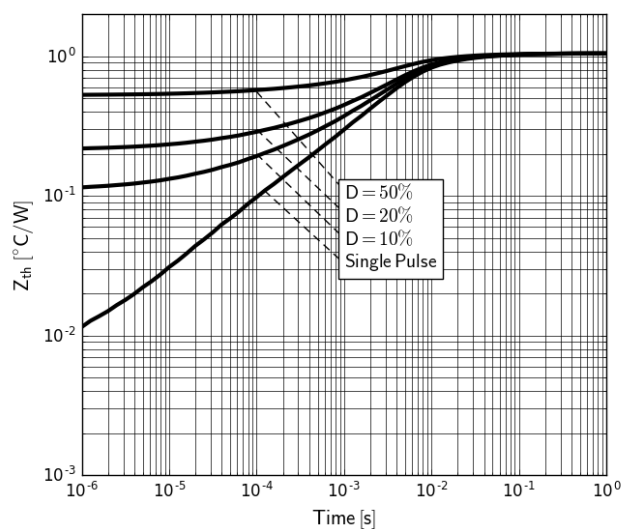
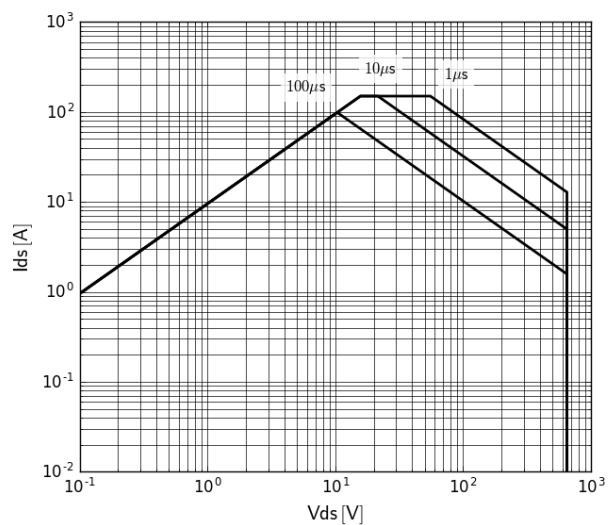


Figure 8. Typical Gate Charge

$I_{DS}=32A$, $V_{DS}=400V$

Typical Characteristics ($T_c=25^\circ\text{C}$ unless otherwise stated)**Figure 9. Power Dissipation****Figure 10. Current Derating**Pulse width $\leq 10\mu\text{s}$, $V_{GS} \geq 10\text{V}$ **Figure 11. Forward Characteristics of Rev. Diode** $I_S=f(V_{SD})$, parameter: T_J **Figure 12. Transient Thermal Resistance**

Typical Characteristics ($T_c=25^\circ\text{C}$ unless otherwise stated)**Figure 13. Safe Operating Area $T_c=25^\circ\text{C}$**

Test Circuits and Waveforms

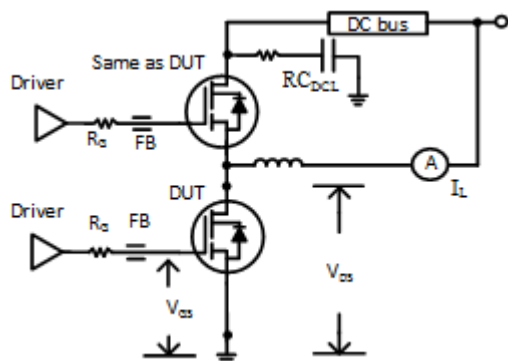


Figure 14. Switching Time Test Circuit

(see circuit implementation on page 3 for methods to ensure clean switching)

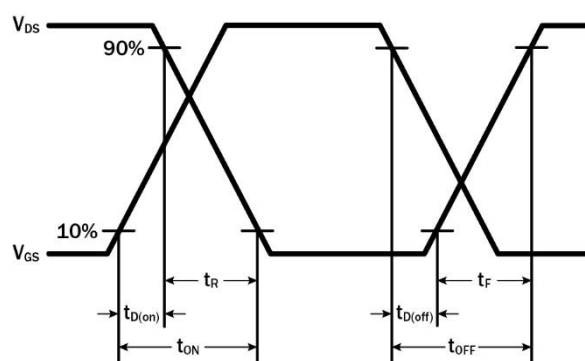


Figure 15. Switching Time Waveform

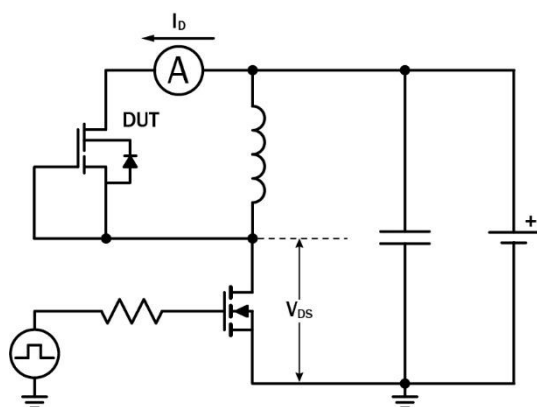


Figure 16. Diode Characteristics Test Circuit

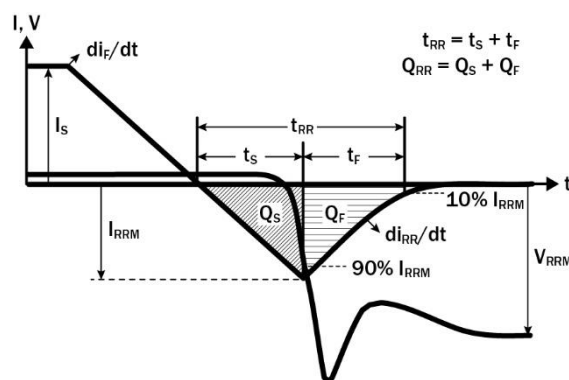
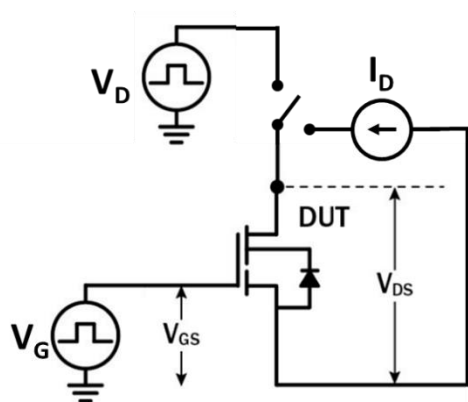
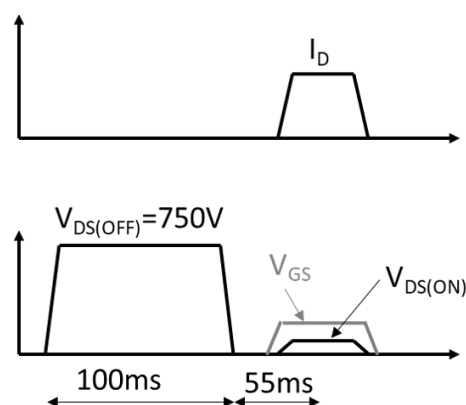


Figure 17. Diode Recovery Waveform

Figure 18. Dynamic $R_{DS(on)eff}$ Test Circuit

$$R_{DS(ON) Eff} = V_{DS(ON)} / I_D$$

Figure 19. Dynamic $R_{DS(on)eff}$ Waveform

Design Considerations

The fast switching of GaN devices reduces current-voltage crossover losses and enables high frequency operation while simultaneously achieving high efficiency. However, taking full advantage of the fast switching characteristics of GaN switches requires adherence to specific PCB layout guidelines and probing techniques.

Before evaluating Renesas GaN devices, see application note [Printed Circuit Board Layout and Probing for GaN Power Switches](#). The table below provides some practical rules that should be followed during the evaluation.

When Evaluating Renesas GaN Devices:

DO	DO NOT
Minimize circuit inductance by keeping traces short, both in the drive and power loop	Twist the pins of TO-220 or TO-247 to accommodate GDS board layout
Minimize lead length of TO-220 and TO-247 package when mounting to the PCB	Use long traces in drive circuit, long lead length of the devices
Use shortest sense loop for probing; attach the probe and its ground connection directly to the test points	Use differential mode probe or probe ground clip with long wire
See Printed Circuit Board Layout and Probing	


GaN Design Resources

The complete technical library of GaN design tools can be found at [Renesasusa.com/design](https://www.renesas.com/design):

- Evaluation kits
- Application notes
- Design guides
- Simulation models
- Technical papers and presentations

Mechanical

3 Lead TO-263 Package

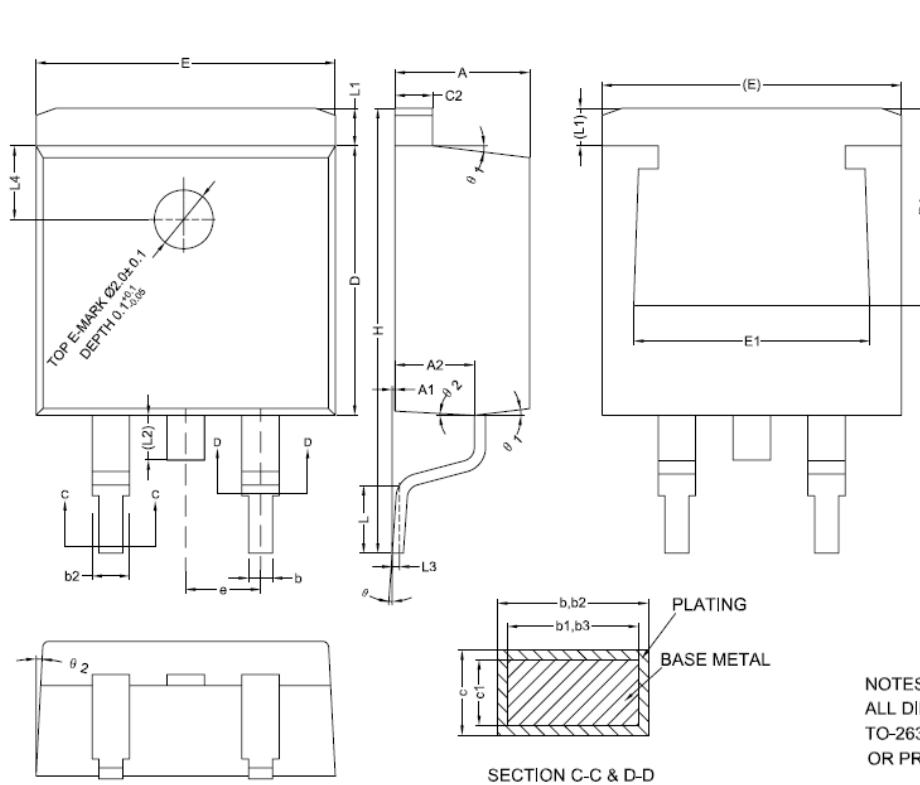


COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)


SYMBOL	MIN	NOM	MAX
A	4.40	4.57	4.70
A1	0	0.10	0.25
A2	2.59	2.69	2.79
b	0.77	-	0.90
b1	0.76	0.81	0.86
b2	1.23	-	1.36
b3	1.22	1.27	1.32
c	0.34	-	0.47
c1	0.33	0.38	0.43
c2	1.22	-	1.32
D	9.05	9.15	9.25
D1	6.60	-	-
E	10.06	10.16	10.26
E1	7.80	-	8.20
e	2.54BSC		
H	14.70	15.10	15.50
L	2.00	2.30	2.60
L1	1.17	1.27	1.40
L2	-	-	1.75
L3	0.25BSC		
L4	2.00REF		
θ	0°	-	8°
θ 1	5°	7°	9°
θ 2	1°	3°	5°

NOTES:
ALL DIMENSIONS REFER TO JEDEC STANDARD
TO-263 AB DO NOT INCLUDE MOLD FLASH
OR PROTRUSIONS.

Half-bridge Reference Schematic and PCB Layout

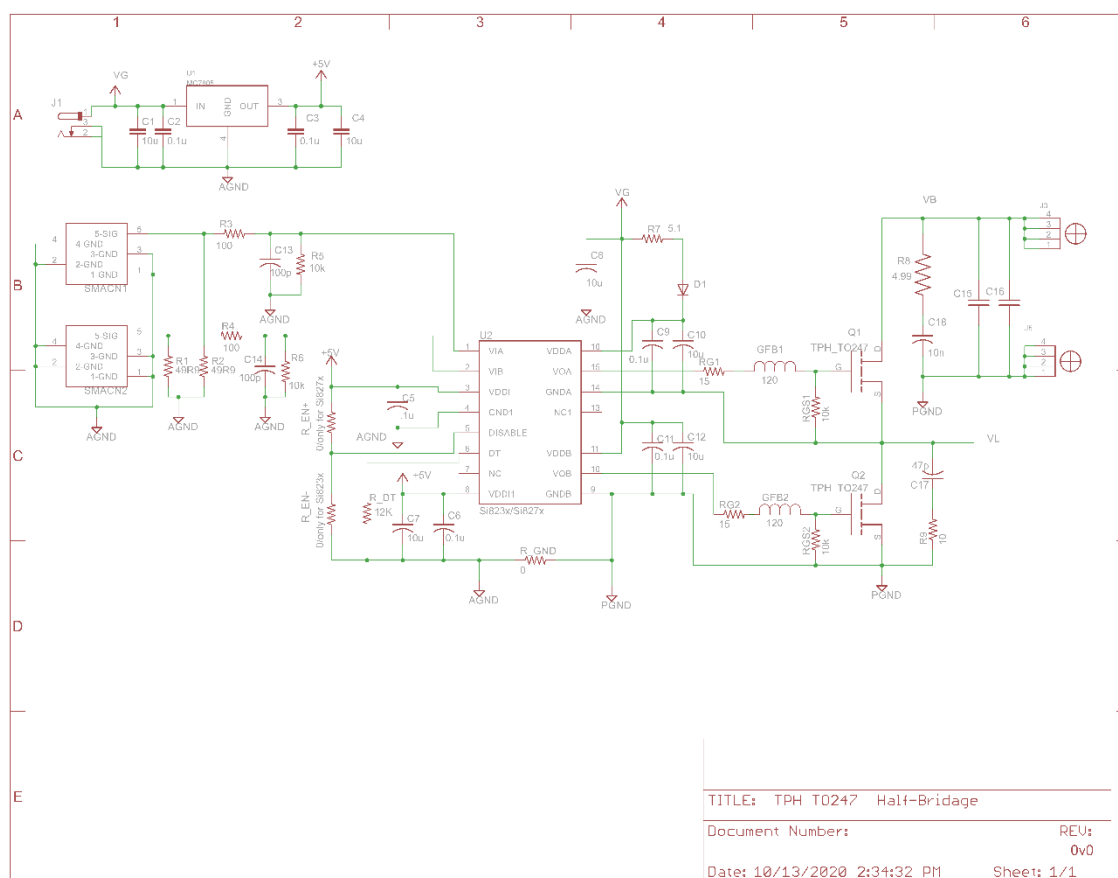

Half-bridge layout Sample (Top Layer)

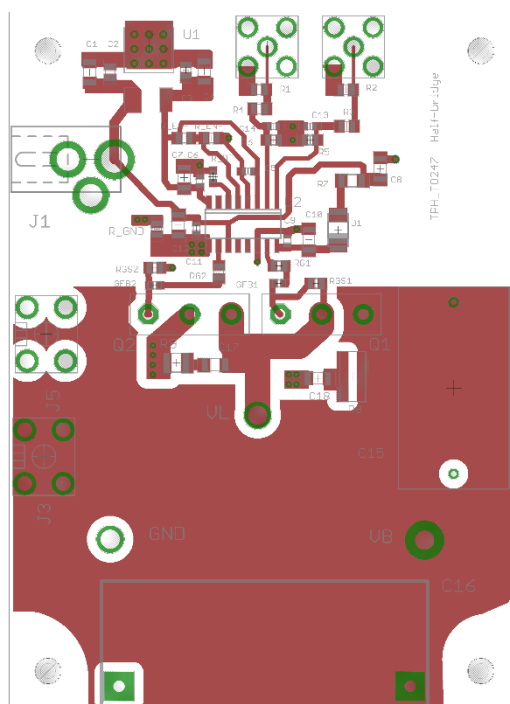

Half-bridge layout Sample (Bottom Layer)

