

MIKROELEKTRONIKA D.O.O, Batajnički drum 23, 11000 Belgrade, Serbia VAT: SR105917343 Registration No. 20490918

Phone: + 381 11 78 57 600 Fax: + 381 11 63 09 644 E-mail: office@mikroe.com

# H-Bridge 12 Click





PID: MIKROE-5690

H Bridge 12 Click is a compact add-on board with an H-Bridge gate driver, also known as a full-bridge pre-driver. This board features the DRV8823, a 4-bridge serial interface motor driver from <u>Texas Instruments</u>. Each of the four H-Bridge driver blocks uses N-channel power MOSFETs configured as H-Bridge to drive the motor windings. All four blocks provide programmable current with up to 1.5A current per channel. This Click board™ makes the perfect solution for the development of printers, scanners, and other office automation applications. It could also be used for developing robots, gaming machines, factory automation, and anywhere where independent control of two different motors is required.

#### How does it work?

H Bridge 12 Click is based on the DRV8823, a four-bridge serial interface motor driver from Texas Instruments. Internally, the motor driver consists of four NMOS H-Bridges, a microstepping indexer, and various fault-protecting features. The motor driver is fully protected against overcurrent, overtemperature, undervoltage, and comes in a thermally-enhanced package. It can control motors that operate in an 8V to 32V voltage range, with up to 1.5A of current per winding. For this, it uses an internal charge pump for the gate drives. Eight current levels set through the serial interface allow micro-stepping with bipolar stepper motors.

Mikroe produces entire development toolchains for all major microcontroller architectures.


Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.







MIKROELEKTRONIKA D.O.O, Batajnički drum 23, 11000 Belgrade, Serbia VAT: SR105917343 Registration No. 20490918 Phone: + 381 11 78 57 600 Fax: + 381 11 63 09 644 E-mail: office@mikroe.com www.mikroe.com

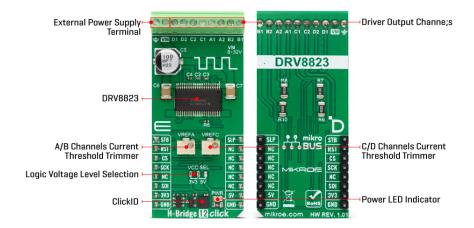

H Bridge 12 Click uses a simple 3-Wire SPI serial interface to communicate with the host MCU. In addition, this Click board™ uses some other pins from the mikroBUS™ socket, such as the RST pin for the device reset. The motor driver outputs can be disabled with the STB's pin LOW logic state while resetting the serial interface. Another neat feature is sleep, which can be activated with logic LOW on the SLP pin of the mikroBUS™ socket. There are two precision potentiometers labeled VREFA and VREFC. The VREFA supplies the referent voltage for setting the current trip threshold for bridges A and B, while the VREFC supplies the referent voltage for setting the current trip threshold for bridges C and D.

H Bridge 12 Click comes with screw terminals for connecting an external motor power supply, labeled with ground and VM. The motors can be connected to 8 terminals appropriately labeled for every single motor output channel. The motor driver supports Brushed DC, Brushless DC, and Stepper motors.

This Click board™ can operate with either 3.3V or 5V logic voltage levels selected via the VCC SEL jumper. This way, both 3.3V and 5V capable MCUs can use the communication lines properly. However, the Click board™ comes equipped with a library containing easy-to-use functions and an example code that can be used, as a reference, for further development.

# **Specifications**

Туре	Brushed
Applications	Can be used for the development of printers, scanners, office automation, factory automation, and more
On-board modules	DRV8823 - a 4-bridge serial interface motor driver from Texas Instruments
Key Features	Four half-bridges for broad operating supply voltage range, up to 1.5A of current per winding, protection features, additional current-set threshold potentiometers, low power consumption, internal charge pump for gate drivers, and more
Interface	SPI
Feature	ClickID

INIKroe produces entire development rooichains for all major microcontroller architectures.

health and safety management system.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.









MIKROELEKTRONIKA D.O.O, Batajnički drum 23, 11000 Belgrade, Serbia VAT: SR105917343 Registration No. 20490918

Phone: + 381 11 78 57 600 Fax: + 381 11 63 09 644 E-mail: office@mikroe.com

www.mikroe.com

Compatibility	mikroBUS™
Click board size	L (57.15 x 25.4 mm)
Input Voltage	3.3V or 5V

# **Pinout diagram**

This table shows how the pinout on H-Bridge 12 Click corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin	mikro™ BUS				Pin	Notes
Serial Data Strobe	STB	1	AN	PWM	16	SLP	Sleep Mode
Reset / ID SEL	RST	2	RST	INT	15	NC	
SPI Select / ID COMM	CS	3	CS	RX	14	NC	
SPI Clock	SCK	4	SCK	TX	13	NC	
	NC	5	MISO	SCL	12	NC	
SPI Data IN	SDI	6	MOSI	SDA	11	NC	
Power Supply	3.3V	7	3.3V	5V	10	5V	Power Supply
Ground	GND	8	GND	GND	9	GND	Ground

# **Onboard settings and indicators**

Label	Name	Default	Description
LD1	PWR	-	Power LED Indicator
JP1	VCC SEL	Left	Logic Level Voltage Selection 3V3/5V: Left position 3V3, Right position 5V
P1	VREFA	-	Current trip threshold potentiometer for A/B channels
P2	VREFC	-	Current trip threshold potentiometer for C/D channels

# H-Bridge 12 Click electrical specifications


Description	Min	Тур	Max	Unit
Supply Voltage	3.3	-	5	V
External Supply Voltage Range	8	-	32	V
Maximum Output Current	-	-	1.5	Α

### Software Support

We provide a library for the H-Bridge 12 Click as well as a demo application (example), developed using MIKROE compilers. The demo can run on all the main MIKROE development boards.

Package can be downloaded/installed directly from NECTO Studio Package Manager (recommended), downloaded from our <u>LibStock™</u> or found on <u>Mikroe github account</u>.

Mikroe produces entire development toolchains for all major microcontroller architectures.







health and safety management system.

MIKROELEKTRONIKA D.O.O, Batajnički drum 23, 11000 Belgrade, Serbia VAT: SR105917343 Registration No. 20490918

Phone: + 381 11 78 57 600 Fax: + 381 11 63 09 644 E-mail: office@mikroe.com

## **Library Description**

This library contains API for H-Bridge 12 Click driver.

Key functions

- hbridge12 write config H-Bridge 12 write settings function.
- hbridge12 set current scale H-Bridge 12 set current scale function.
- hbridge12 turn clockwise H-Bridge 12 turn motor clockwise function.

#### **Example Description**

This example demonstrates the use of the H-Bridge 12 Click board  $^{\mathsf{m}}$  by driving the motor connected to OUT A and OUT B, in both directions with braking and freewheeling.

The full application code, and ready to use projects can be installed directly from NECTO Studio Package Manager (recommended), downloaded from our  $\underline{\mathsf{LibStock}^{\mathsf{m}}}$  or found on  $\underline{\mathsf{Mikroe\ github\ account}}$ .

Other Mikroe Libraries used in the example:

- MikroSDK.Board
- MikroSDK.Log
- Click.HBridge12

#### Additional notes and informations

Depending on the development board you are using, you may need <u>USB UART click</u>, <u>USB UART 2 Click</u> or <u>RS232 Click</u> to connect to your PC, for development systems with no UART to USB interface available on the board. UART terminal is available in all MIKROE <u>compilers</u>.

#### mikroSDK

This Click board<sup>™</sup> is supported with  $\underline{\mathsf{mikroSDK}}$  - MIKROE Software Development Kit. To ensure proper operation of mikroSDK compliant Click board<sup>™</sup> demo applications, mikroSDK should be downloaded from the  $\underline{\mathsf{LibStock}}$  and installed for the compiler you are using.

For more information about mikroSDK, visit the official page.

#### Resources

mikroBUS™


mikroSDK

Click board™ Catalog

Click boards™

ClickID

Mikroe produces entire development toolchains for all major microcontroller architectures.







health and safety management system.



MIKROELEKTRONIKA D.O.O, Batajnički drum 23, 11000 Belgrade, Serbia VAT: SR105917343 Registration No. 20490918

Phone: + 381 1178 57 600 Fax: + 381 11 63 09 644 E-mail: office@mikroe.com www.mikroe.com

# **Downloads**

H-Bridge 12 click example on Libstock

DRV8823 datasheet

H-Bridge 12 click 2D and 3D files v101

H-Bridge 12 click schematic v101

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.





health and safety management system.