


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.10	阿树

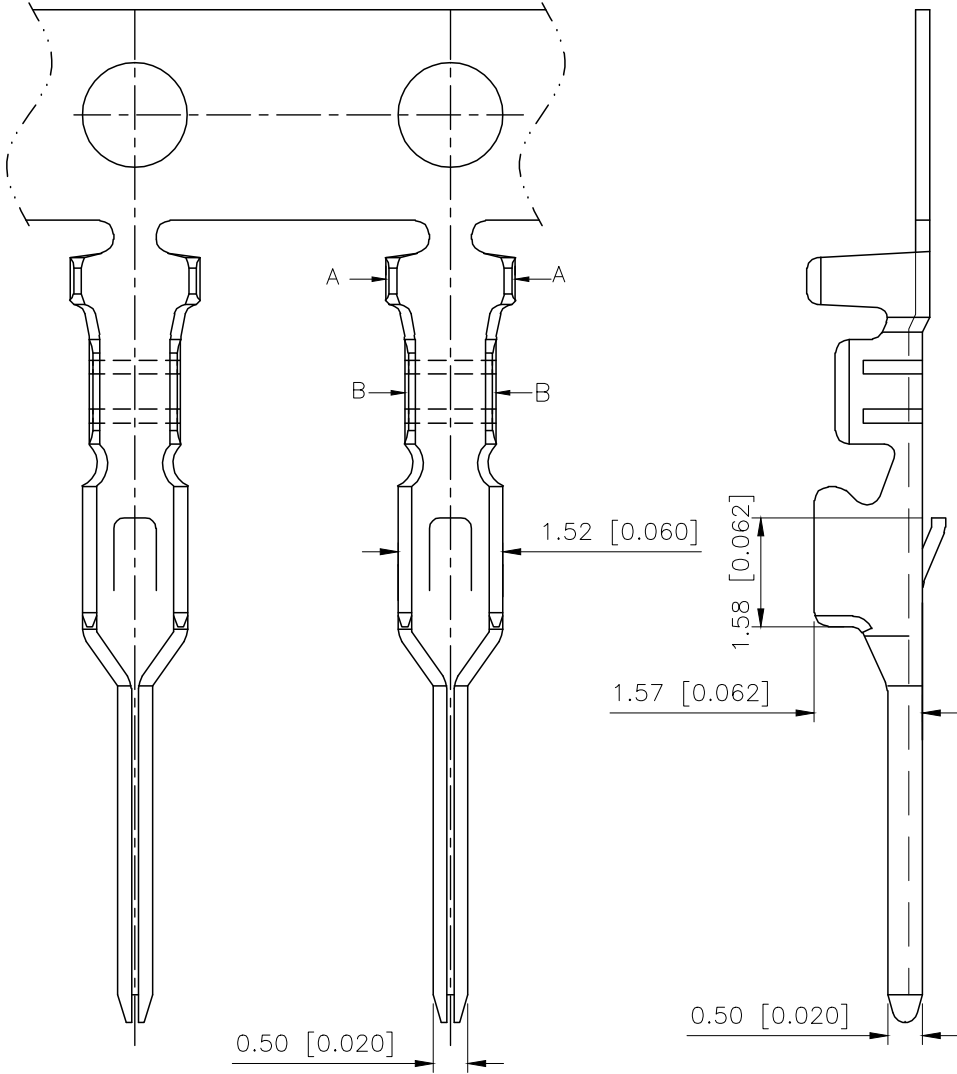

- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:2A AC/DC
 - Withstanding Voltage:800V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤20mΩ

PART NO.:
X2016 I M-P SN
① ② ③ ④ ⑤

- ①Series No
②Category:T-Terminal
③M-Male
④Material:P-Phosphor bronze
⑤Plating style:SN-Bright tin plating

X2016TM-PSN	Phosphor bronze	AWG#22-28	Tin plating	X2016HF
PARY NO	Matrial	Wire range	Finish	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 2.00mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.: X2016TM-PSN
APPROVED		SIZE:	A4	DWG NO.: