

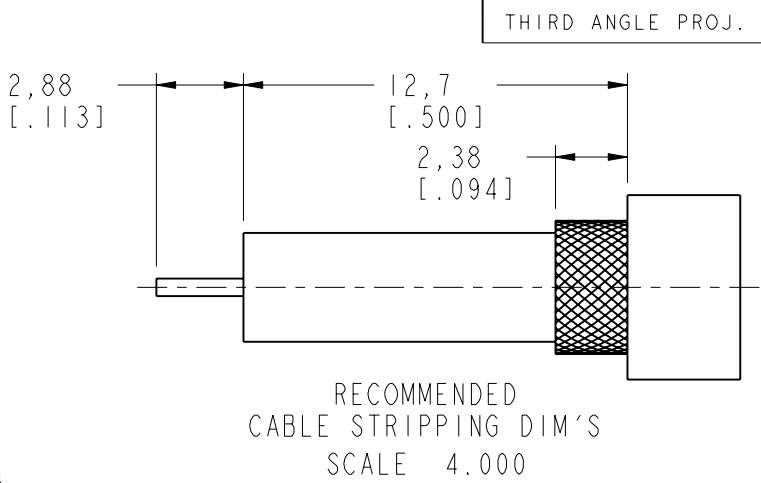
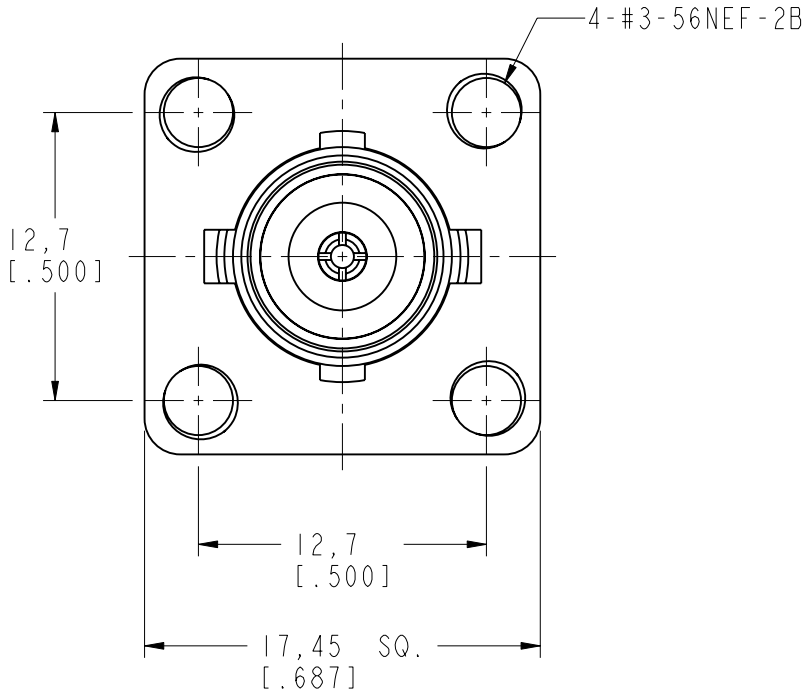
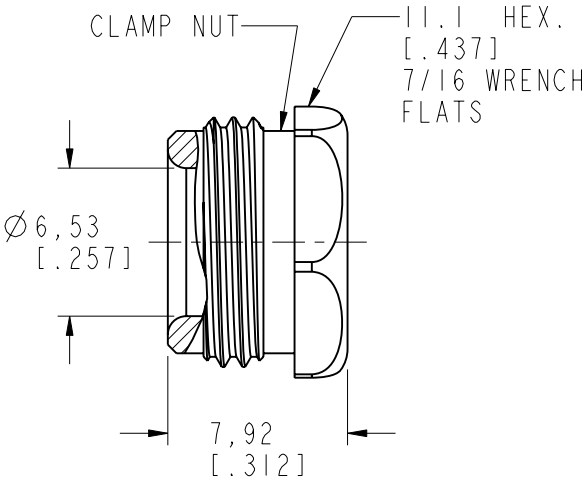
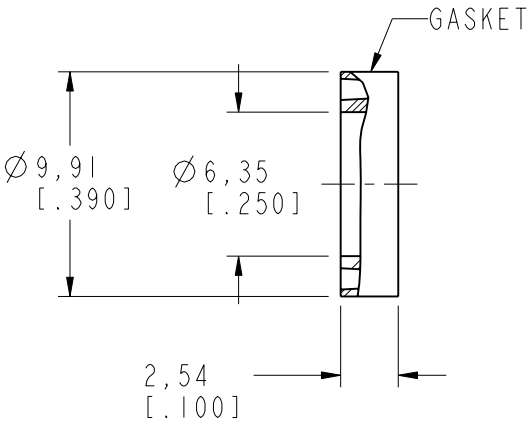
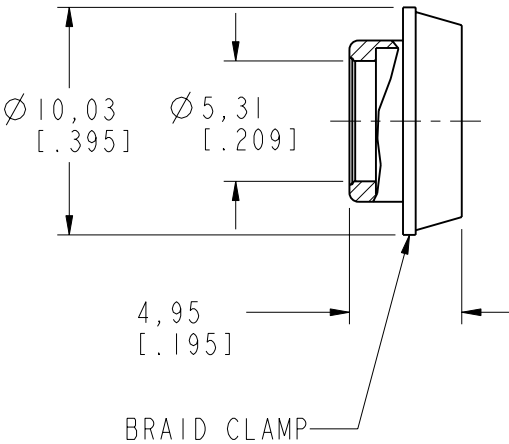


NOTES:

1. MATERIALS AND FINISHES:
BODY - BRASS, NICKEL PLATING
CONTACT - BeCu, SILVER PLATING
INSULATOR - PTFE
2. ELECTRICAL:
A. IMPEDANCE: NON-CONSTANT
B. FREQUENCY RANGE: DC-50 GHz
C. VOLTAGE RATING: 5,000 VOLTS PEAK
3. MECHANICAL:
A. TEMPERATURE RANGE: -65° C TO +165° C

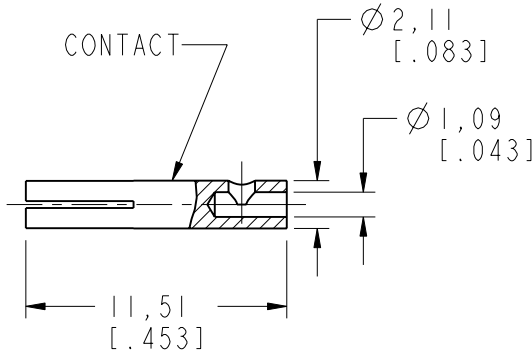

RECOMMENDED
CABLE STRIPPING DIM'S
SCALE 4.000

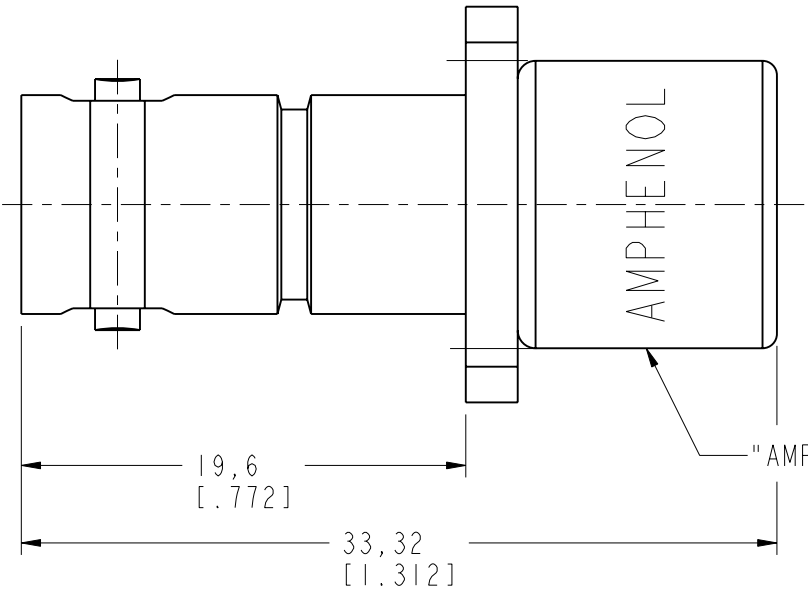

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ± 1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other sperson to manufacture, use or sell any product, process or design, patented or otherwsie, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL	DRAWN R. MAO	DATE 13-Jun-12	TITLE MHV PANEL JACK FOR RG-59/U RG-62/U CABLE		Amphenol RF www.amphenolrf.com	
	-	ENGINEER S. LI	DATE 13-Jun-12				
	REFERENCE	APPROVED S. HSIEH	DATE 13-Jun-12	SCALE: 3.0:1.0 SHEET 2 OF 2		DRAWING NO. 28175	
	CONFIGURATION LEVEL: □□□□	CAD FILE		DWG SIZE B	REV J	ITEM NO. 28175	
	FINISH					PART NO. 28175	