




E-NETTR 10/100/1000 Base-T DUAL Port Transformer Module

P/N: H4832P

- * Designed to meet IEEE802.3bt requirement
- * Lead-Free & Designed to meet RoHS requirement
- * Designed to meet IR255°C peak requirement
- * Operating temperature range -40°C to +85°C
- * Storage temperature range: -40°C to +85°C
- * POE applications with 1A current capability




Electrical Specifications@25 °C

Part Number	Turn Ratio (±3%)	OCL(uH Min) @ 100KHz/0.1V with 15mA DC Bias	L.L (uH Max)	C _{w/w} (pF Max)	DCR (Ω Max)	Hi-Pot (Vrms MIN)
H4832P	1CT:1CT	350	0.5	28	1.4	AC1500V / 1mA/1S

Continue


Part Number	Insertion Loss 0.3~100MHZ (dB Max)	Return Loss (dB Min)					Cross Talk (dB Min)			DCMR (dB Min)		
		0.3-40MHz	50MHz	60MHz	80MHz	100MHz	30MHz	60MHz	100MHz	30MHz	60MHz	100MHz
H4832P	-1.4	-16	-14.08	-12.5	-10	-8	-40	-35	-30	-40	-35	-30

Mechanical

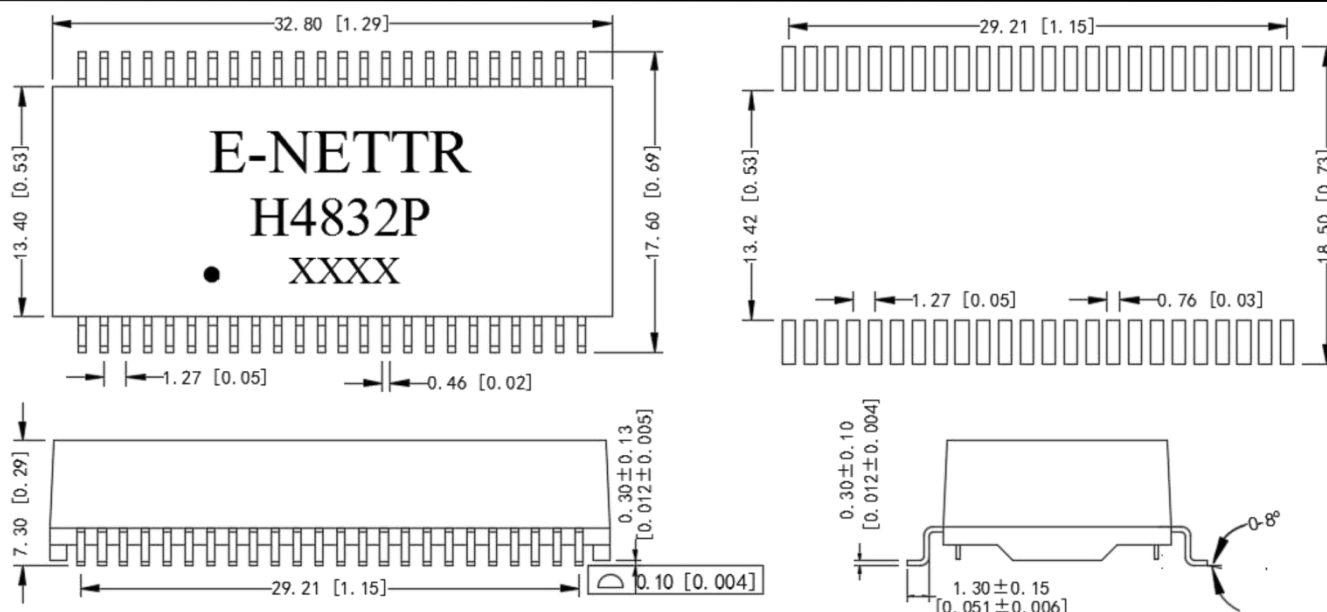

Unless:mm[inch] Tolerances: xx.xo± 0.25[0.010]
o.xx± 0.05[0.002]

Schematics

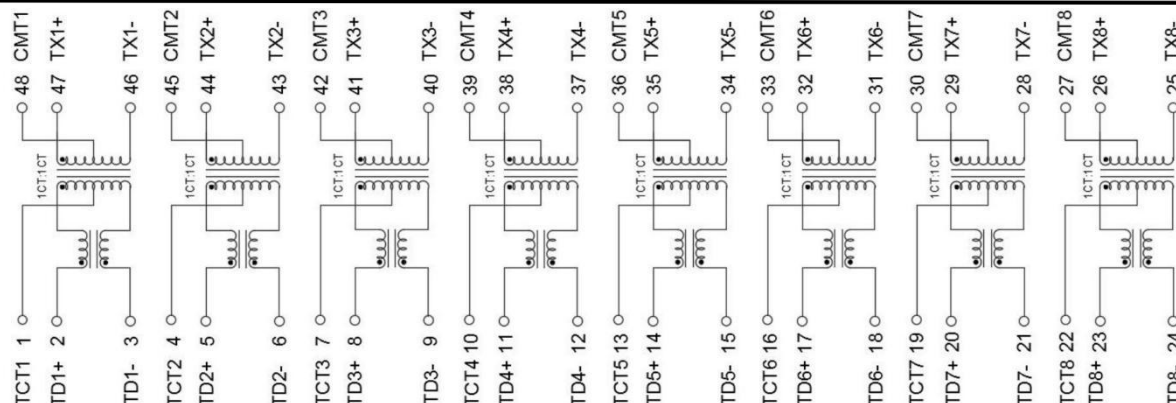

东莞市祥星电子有限公司

地址: 东莞市石碣镇横滘科技中路第三工业区 Miss Xie: 13549396638

TEL:0769-86384669

FAX:0769-81813600

Http://www.e-nettr.com

xingguang@e-nettr.com