

Electronically Commutated (EC) Fan

Axial Fan

(120 x 145 x 38 mm)



Delta Electronics, Inc.
No.252, Shangying Road, Guishan
Industrial Zone, Taoyuan City,
33341, Taiwan
TEL: +886-3-359-1968
FAX: +886-3-359-1991
www.deltaww.com


Technical features

Input Side	
Input Source	1~ 100Vac - 240Vac
Nominal Voltage	1~ 230Vac 50/60Hz
Power @ Free air	18W
Power @ Max. load	26W
Power On Label	26W
Output Side	
Speed (RPM)	4100
Qmax. (CMH / CFM)	313 / 184
Pmax. (Pa / inAq)	210 / 0.84
Noise (dB-A)-FREE AIR	55.5 (MAX. 59.5)
Functions	
Locked rotor protection	
Speed Signal Output (F00)	
Speed control (0~10VDC / PWM)	

Physical	
Rotation Direction	CCW seen on rotor
Material (Impeller / Frame)	Plastic / Plastic
Bearing system	Ball bearings
Weight (kg)	0.48
Electrical leads	Lead wire
Environmental	
Operating temperature range	-20 ~ +70 °C
Storage temperature range	-40 ~ +75 °C
Safety	
Safety	
IP Level	IP54
EMC	EN61000-6-1 , EN61000-6-3 , EN61000-3-2/3
Protection class	II
Insulation class	A
Leakage current	≤ 3.5 mA
Life expectance (L10)	70,000 hrs. at 40 °C / 15 ~ 65 %RH

NOTE : Delta reserves the right to change specifications and other product information without prior notice.

P & Q curves

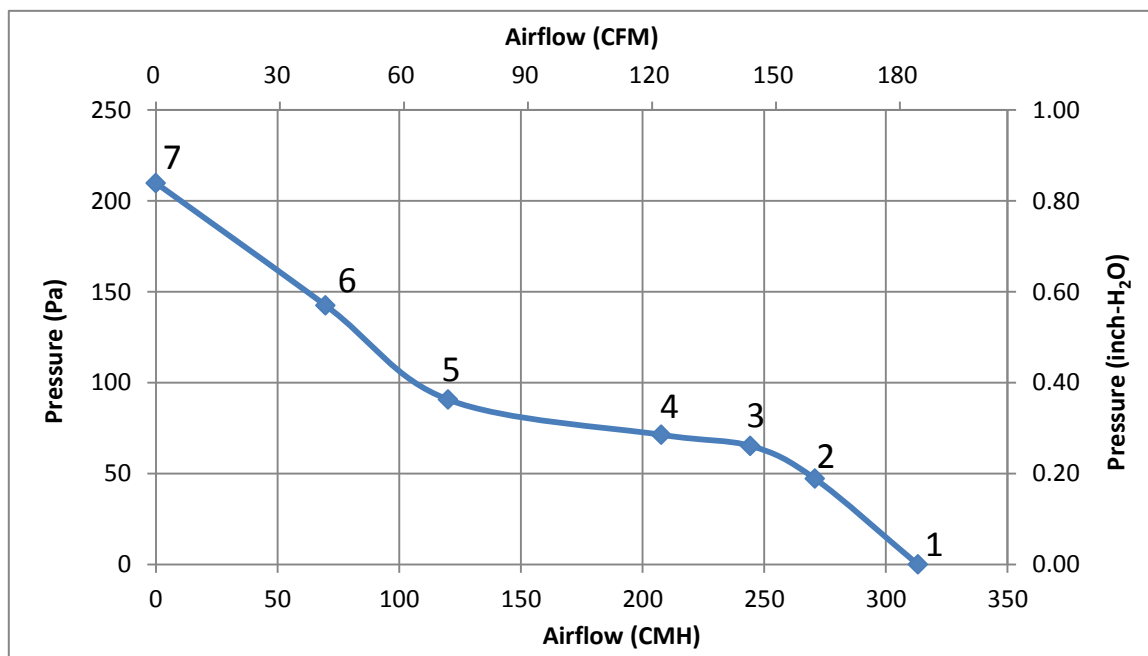

Measure data:


	P [Pa]	Q [CMH]	N [R.P.M.]	P1 [W]	I [A]	Lp [dB(A)]
1	0	313	4148	18.0	0.14	55.5
2	47	271	4156	20.2	0.16	
3	65	244	4188	20.8	0.16	
4	71	207	4151	17.4	0.14	
5	91	120	4148	18.5	0.15	
6	143	70	4142	20.5	0.16	
7	210	0	4156	25.5	0.18	

Test Condition :


- Input Voltage: Nominal Voltage
- Temperature : Room Temperature
- Humidity : 65%RH
- Measured without fan-guard
- Noise (Lp) is measured at a distance of one meter from the intake side.

Dimension drawing

Label :




Fan :


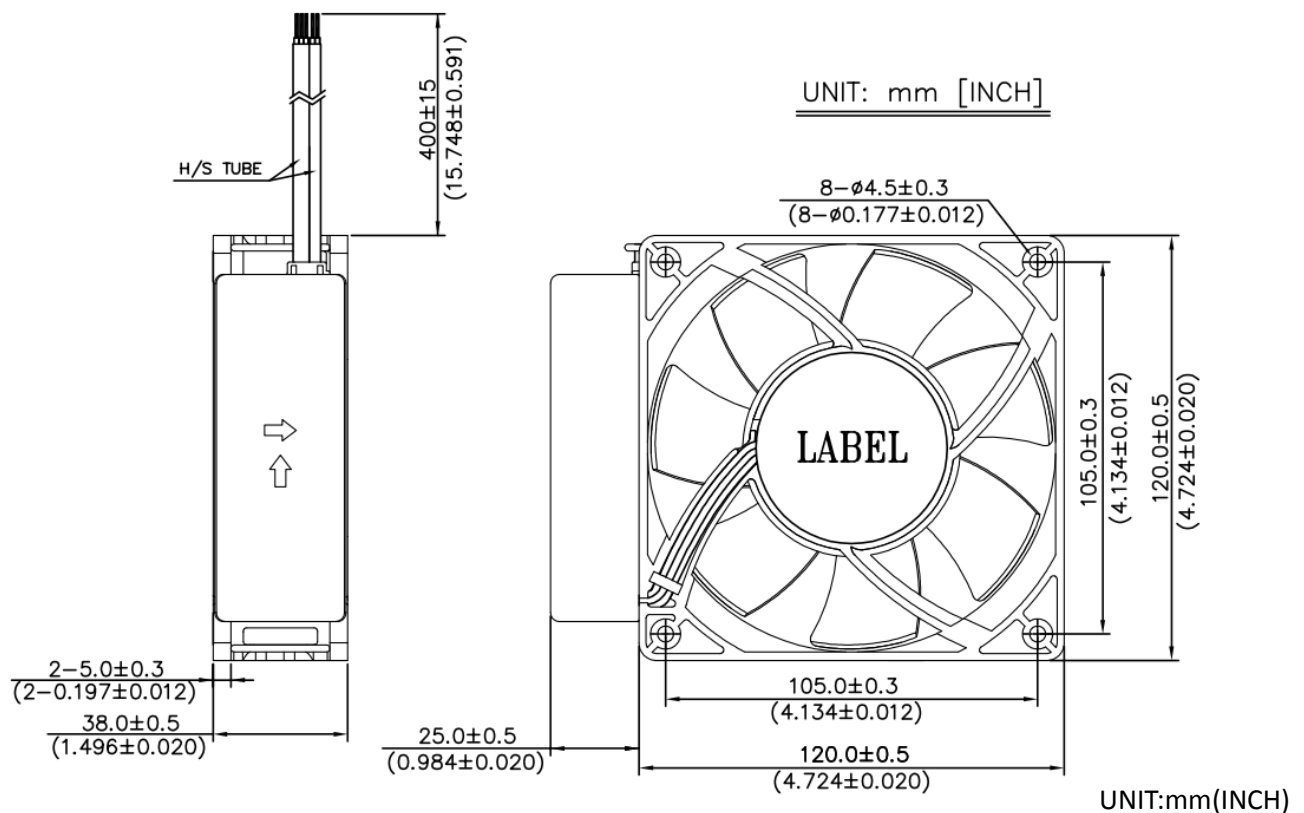



WIRE TYPE	Cable	Color	Functions
UL1007 26#AWG	Cable1 Power	Red	Line/ AC main (1~ 100-240VAC)
		Blue	Neutral/ AC main (1~ 100-240VAC)
	Cable2 Signal	White	F00
		Yellow	Speed control (0~10V _{DC} / PWM)
		Black	0V

Lead wire connection

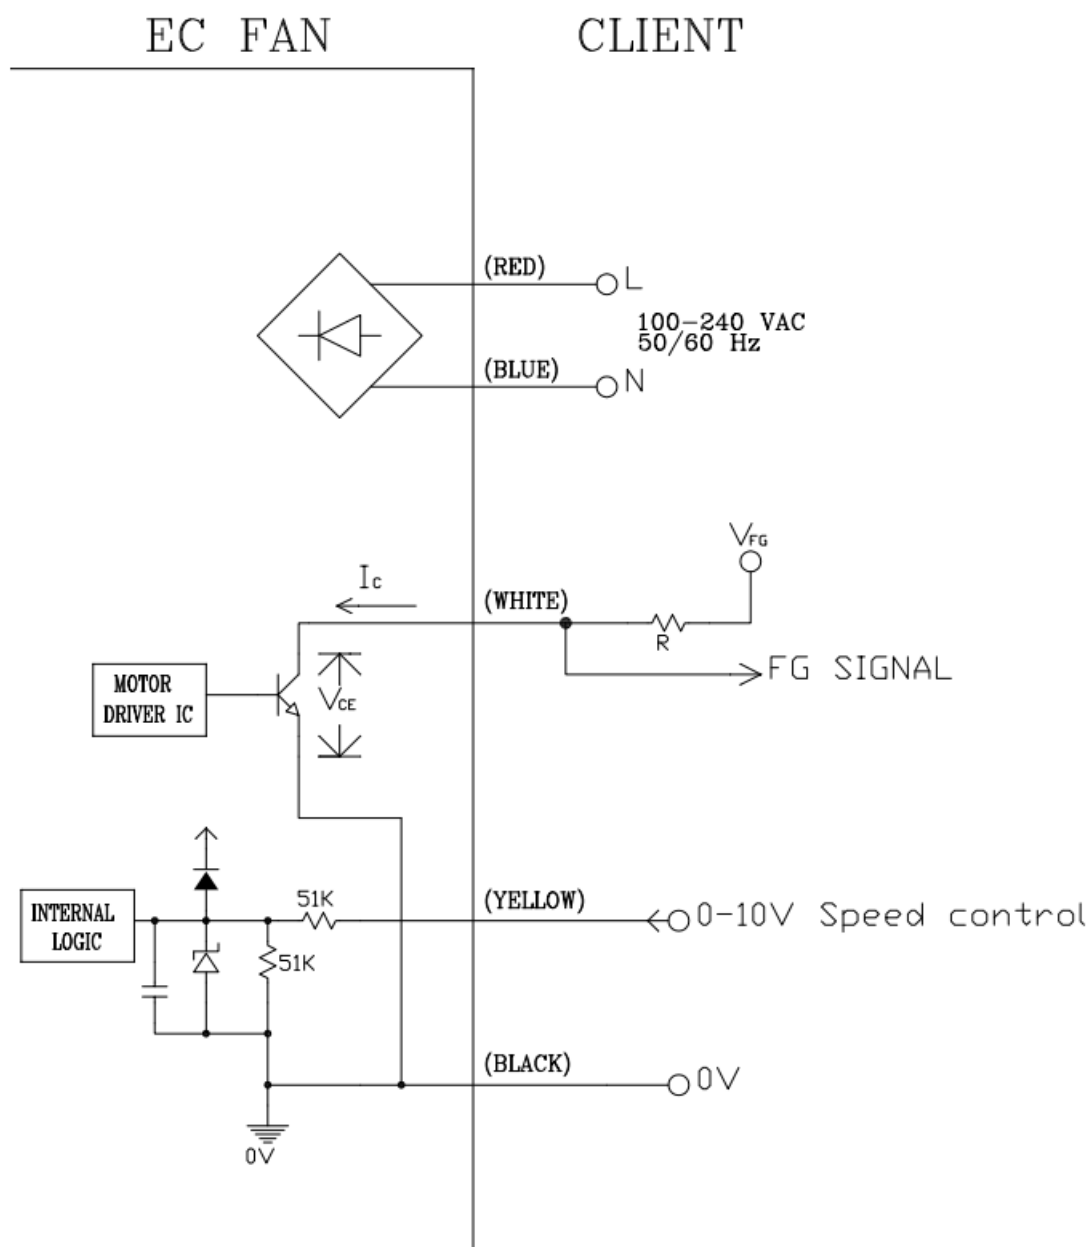


FUNCTION CONTROL

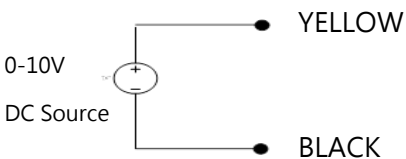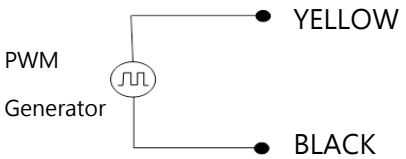Speed setting	
Full Speed 	Apply "+10V (external voltage source)" to "Speed control pin" (Yellow lead) Fan will run full speed. *Note: The external +10V source (provided by client) must have capability of providing 0.1mA (min)
Voltage Control 	Use voltage source support 0~10VDC voltage DC+ : connector YELLOW DC- : connector BLACK -Voltage higher than 1.5VDC, fan start up. -Voltage lower than 0.5VDC , fan stop
PWM Control 	PWM duty control PWM amplitude is 10VDC(±5%) Frequency Range is 1kHz ~ 30kHz -PWM duty higher than 15%, fan start up ° -PWM duty lower than 5%, fan stop °

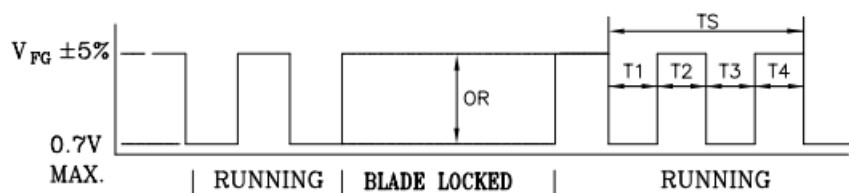Signal function											
Voltage control	The speed comparison will control level <table><tr><th>Voltage (V)</th><th>PWM (%)</th><th>Speed (RPM) (REF)</th></tr><tr><td>0</td><td>0</td><td>0</td></tr><tr><td>9.5</td><td>95</td><td>4100</td></tr></table>		Voltage (V)	PWM (%)	Speed (RPM) (REF)	0	0	0	9.5	95	4100
Voltage (V)	PWM (%)	Speed (RPM) (REF)									
0	0	0									
9.5	95	4100									
Frequency generator (FG) signal	$V_{CE(sat)} = 0.7V \text{ MAX.}$ $I_C = 5mA \text{ MAX.}$ $V_{FG} = 60.0V \text{ MAX.}$ $R \geq V_{FG} / I_C$ Frequency generator waveform  $N = \text{R.P.M}$ $TS = 60/N(\text{SEC})$ 2 PULSES PER REVOLUTION $T1 = T2 = T3 = T4 = 1/4 \text{ TS}$										

CONTROL LEVEL & SPEED CURVE

Voltage(V)	PWM Duty(%)	Speed R.P.M.(ref.)	Power(W)
0.0	0	0	0.9
9.5	95	4100	18

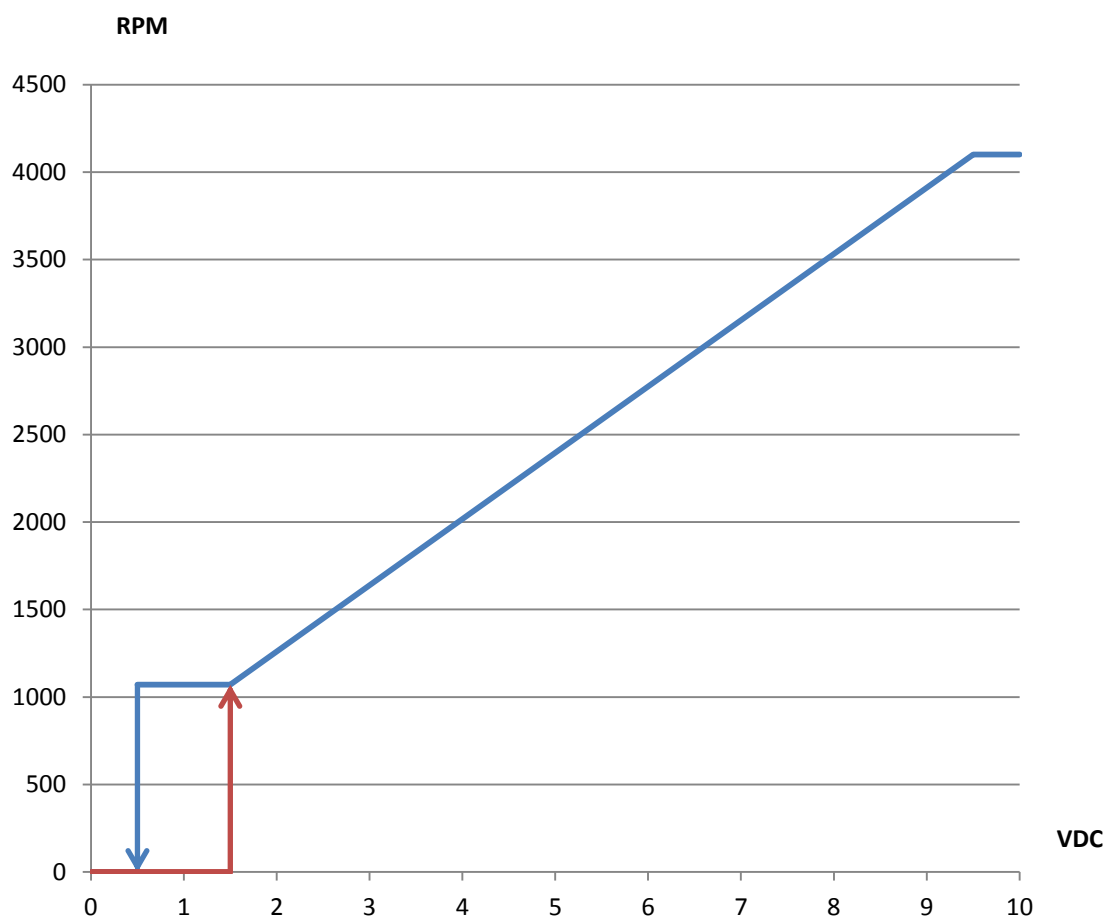

Voltage(VDC) , PWM duty (%)

Voltage	0	0.5	1	1.5	2	3	4	5	6	7	8	9	10	VDC
PWM duty	0	5	10	15	20	30	40	50	60	70	80	90	100	%