



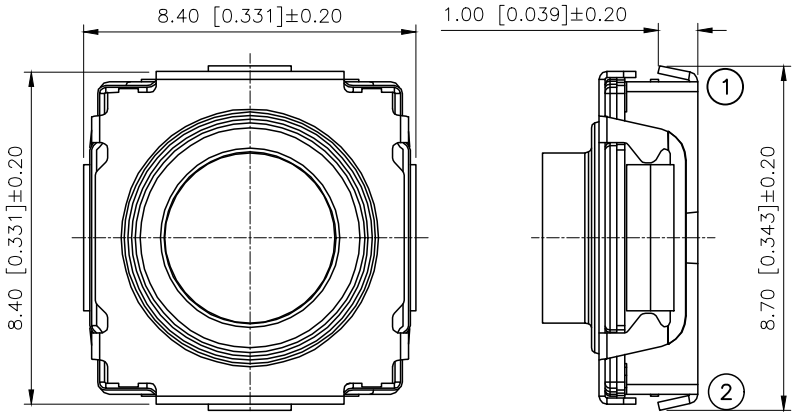


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.06	阿树

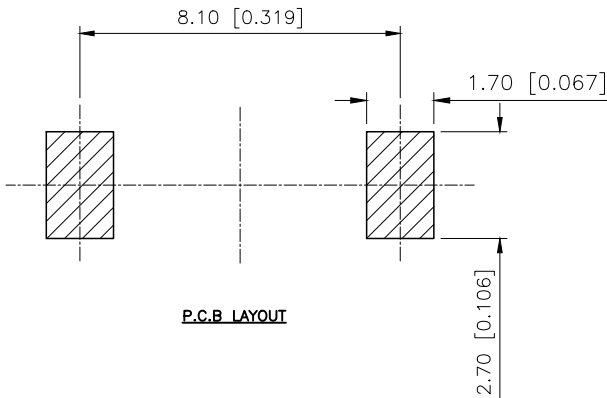


Specifications:
Voltage rating: 16 V AC / DC
Current rating: 50mA AC / DC
Withstanding voltage: 250V AC/minute
Temperature range: -40°C~+90°C
Insulation resistance: 1000MΩ Min
Operating force: 1000gf+300gf
Life: 200,000cycles
Protection grade: IP54
Stroke: 0.90mm+0.30mm

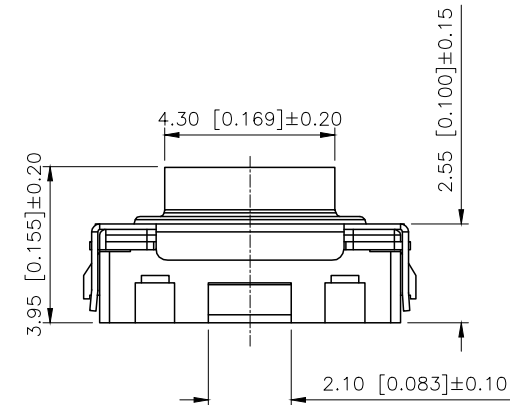

TS-8484 -X -X

E:400gf±80gf
H:700gf±200gf
K:1000gf±300gf

G:Green
Y:Yellow
BL:Blue



CIRCUIT DIAGRAM

5	Button	1	Silica gel	Green(400gf)/Yellow(700gf) /Bule (1000gf)
4	Ironclad	1	SUS304	-
3	Contact	1/2/3	SUS301	-
2	Base	1	LCP	Black
1	terminal	2	Brass	Silver plating
ITEM	PAPT NAMF	QTY	Material	Remark

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	TACT SWITCH
CHECKED		UNIT:	mm/in	PART NO.:	TS-8484-X-X
APPROVED		SIZE:	A4	DWG NO.:	