
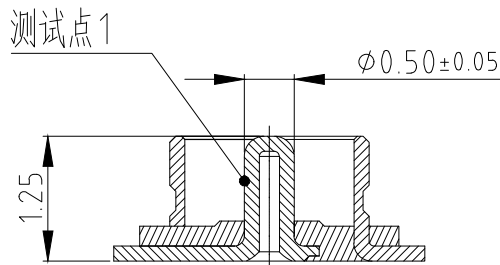
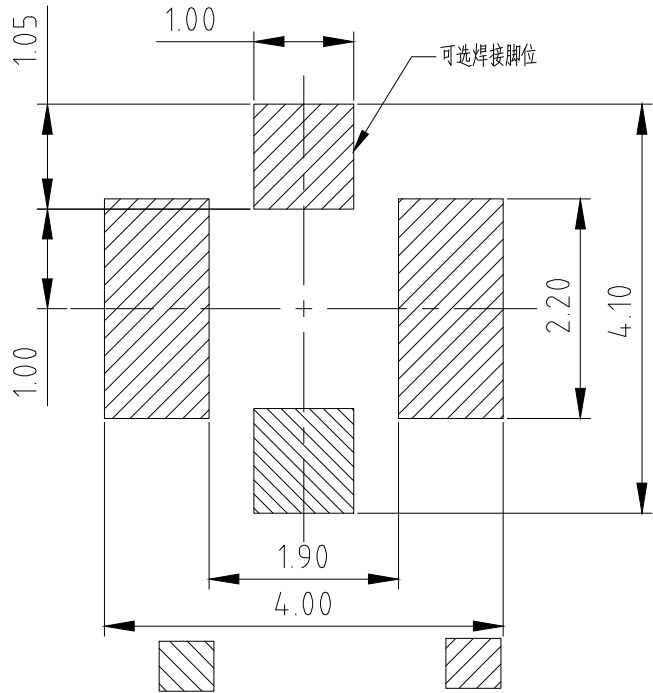
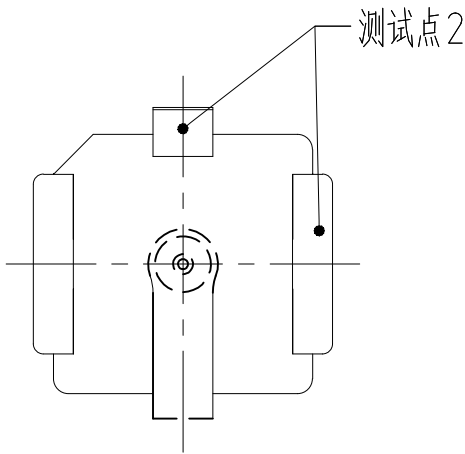
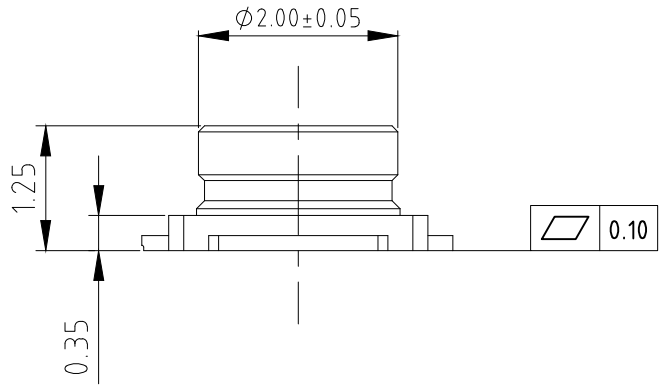
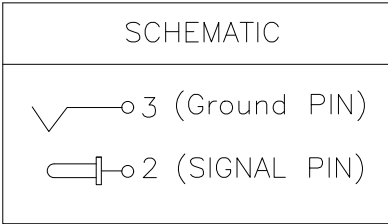
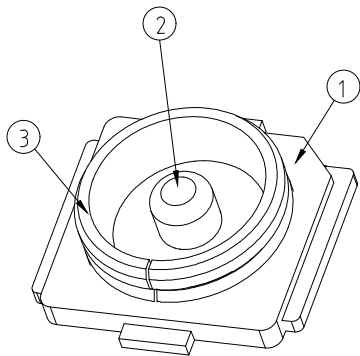


标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE

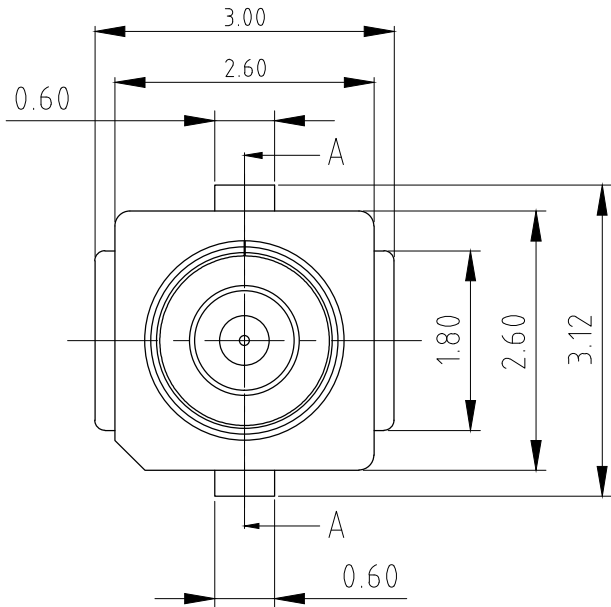

Section: A-A

SIGNAL CONTACT GROUND CONTACT
P.C.B DIMENSION (TOP VIEW)
(TOLERRANCE ±0.05)

NOTES:

- FREQUENCY RANGE:
DC TO 6GHZ (VSWR: 1.3MAX AT 0.1~3GHZ,
1.4MAX AT 3~6GHZ)
- CHARACTERISTIC IMPEDANCE: 50Ω(NOMINAL);
- TEMPERATURE: -40°C TO +90°C;
- RATED VOLTAGE : 60VAC;
- CONTACT RESISTANCE :
20mΩ Max.(SIGNAL CONTACT)
10mΩ Max.(GROUND CONTACT)
- WITHSTAND VOLTAGE : 200VAC FOR 1 MINUTE ;
- INSULATION RESISTANCE : 500MΩ MIN. AT 100VDC;
- THIS COMPONENT IS HALOGEN FREE.

2	接触	铜合金	镀金/镀镍	
1	基座	LCP	米色	
序 号	品 名	材 质	电镀/颜色	备 注

	深圳市虹成电子有限公司		品 名 TITLE	连接器	
			料 号 PART NO	HC-IPEX0125-01	
GENERAL TOLERANCES (UNLESS SPECIFIED)		比 列 SCALE	1:1		
X. ±0.25	X.° ±2°	单 位 UNIT	MM	制 图 DRAW	AhYe
.X ±0.20	.X° ±1°	张 数 PART NO	1 OF 1	审 核 CHECKED	夏操云
.XX ±0.15	.XX° ±0.5°	版 本 REV	A	批 准 APPROVE	赵亮亮

