
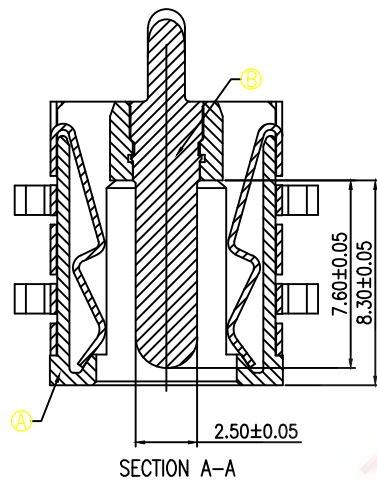
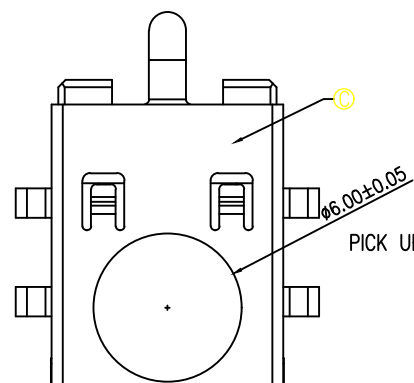

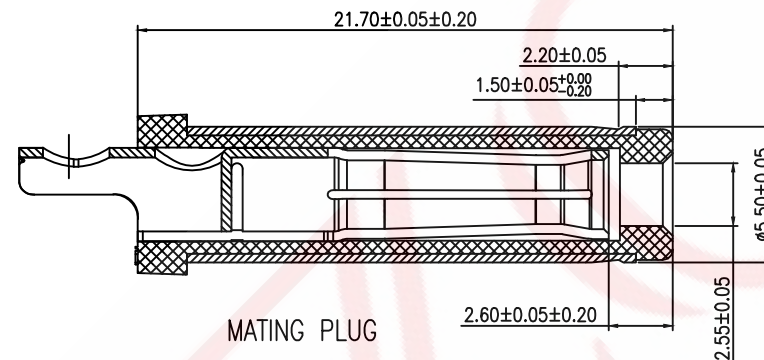
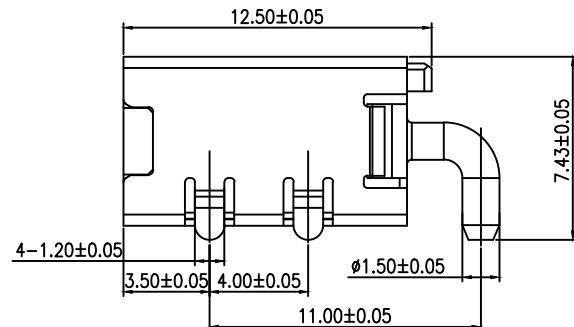


ROHS

REV	ECN NO	DESRPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2020.06.12

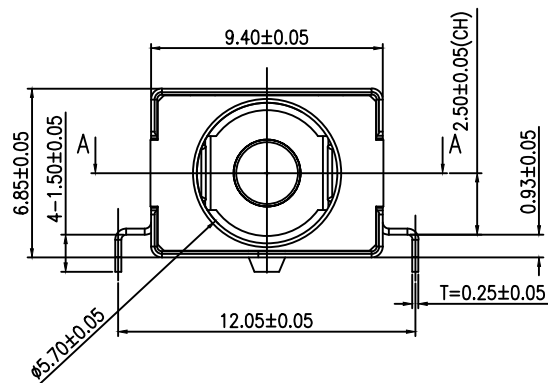


SPECIFICATION:


1. RATING: DC 30V 15A
2. CONTACT RESISTANCE:
30mΩ MAX(INITIAL).
50mΩ MAX(FINAL).
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES

9C N 5 125 B E G B

Model Definition
Mould Number: MX1125
Needle Diameter: 2.5 mm
Fixing Method: Without Fixed Column
Interface Method: Conventional Interface
Overall Length: 15.2 mm
Pin Position: 5 Pin
Mounting Method: Recessed Board DIP
Product Series: DC Power Jacks

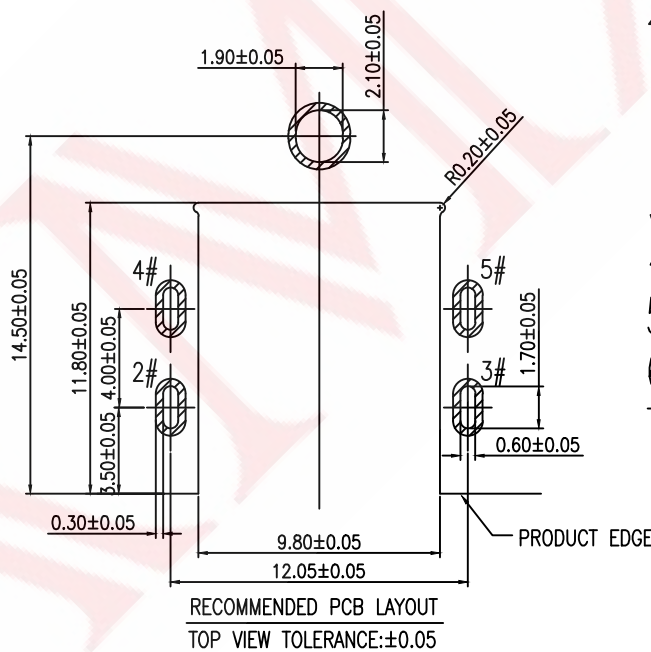

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
C	SHELL	C5210	Ni 40u" MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH /Ni 40u" MIN.	1
A	HOUSING	PA10T	BLACK	1



DESIGN	WANGGUIFA	2018.06.12	12	≥2~5<	±0.25
CHECKED	ZHENGUILAN	2018.06.12	12	≥0~2<	±0.15
APPROVED	LILIANJIANG	2018.06.14	14	≥5	±0.35

FIRST VIEW

SCALE 1:1 UNIT mm

SAMZO COMPONENTS
Electronic switch and connector manufacturer

The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.KKK-JP.COM

TITLE: 大电流沉板0.93 5PIN插件	
DWG NO: 9CN5125-A1125	
PART NO: 9CN5-55251125	
MODEL NO: 9CN5125BEGB	
NAME:	DC JACK