
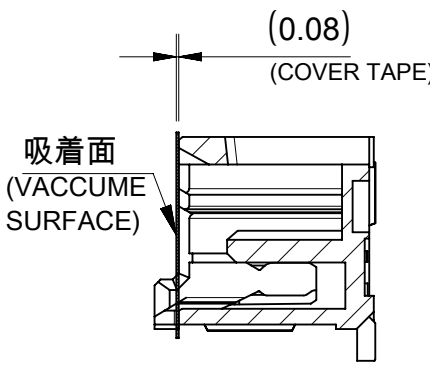
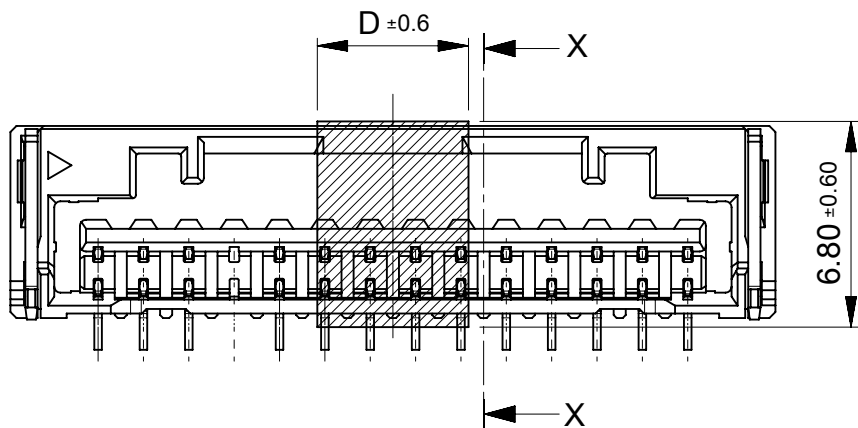
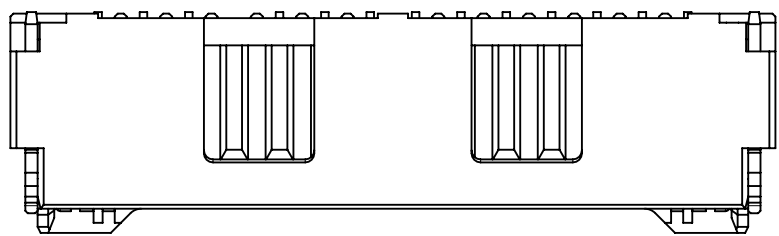



ロック形状および吸着エリア
LOCK SHAPE AND VACCUME AREA

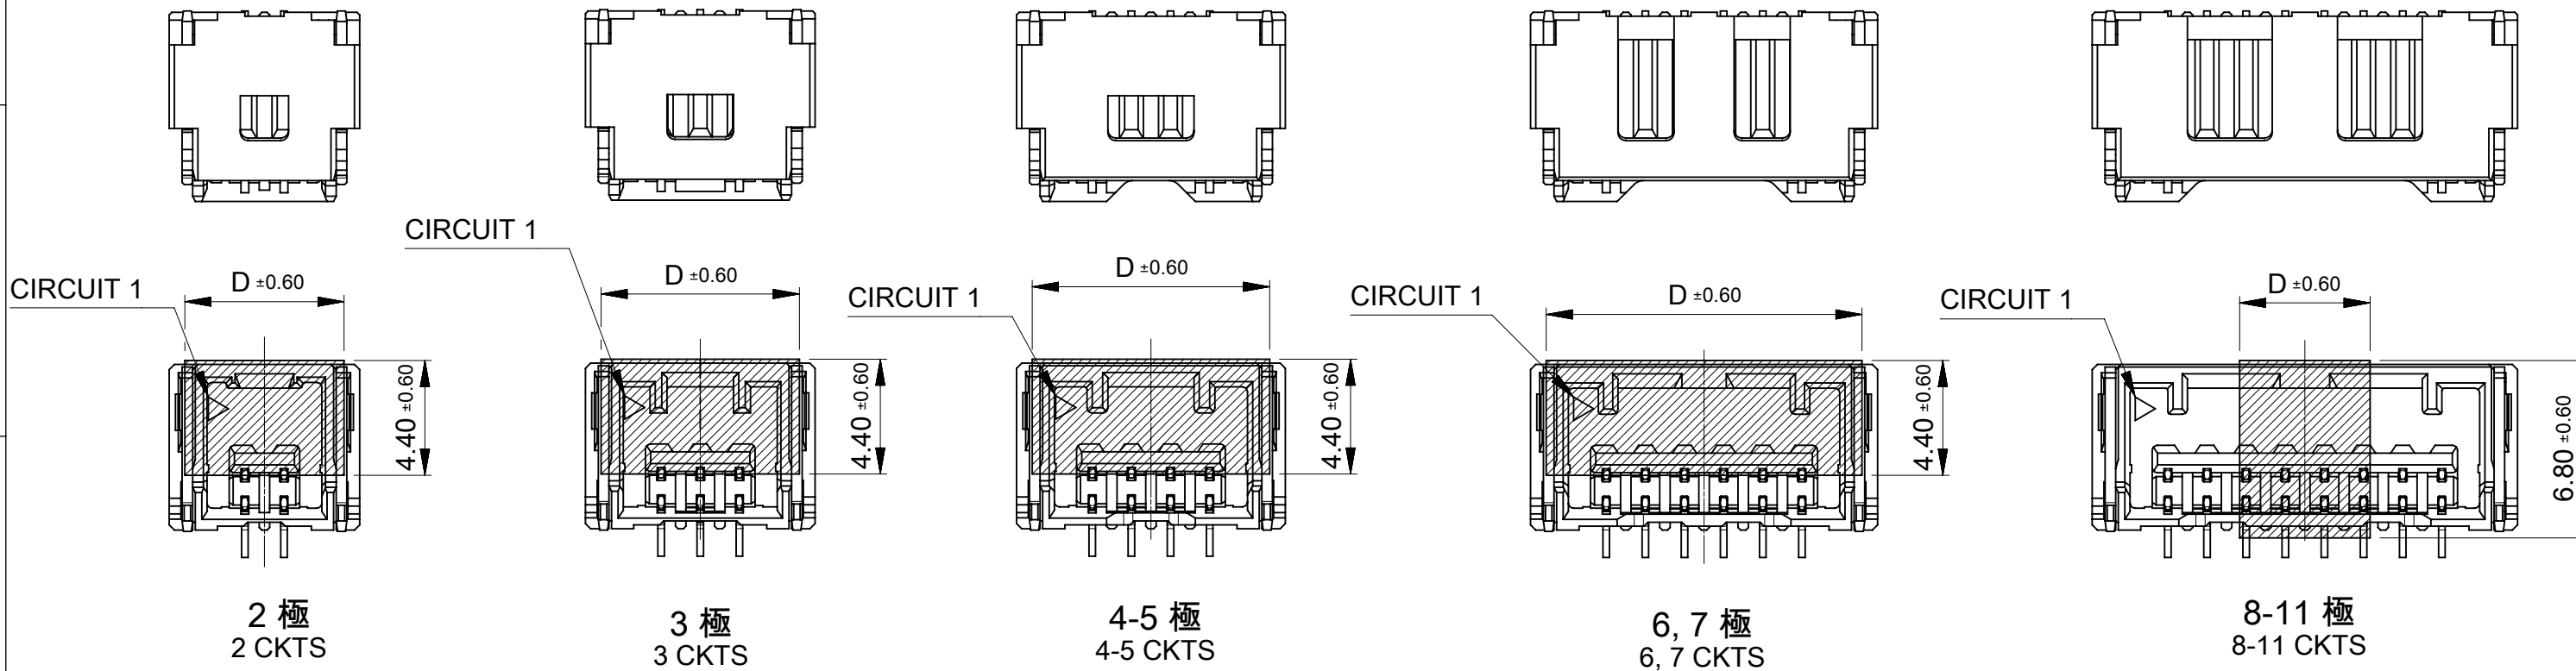

SECTION X-X

5.0	15
	14
	13
	12
	11
	10
	9
	8
13.6	7
12.1	6
10.6	5
9.1	4
7.6	3
6.1	2
D	極数 CKT NO

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		molex	
DIMENSION UNITS mm	SCALE NTS				
GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 742719		CLIK-MATE 1.5 SINGLE ROW SMT VT TYPE REC ASSY GOLD PLATING	
ANGULAR TOL ± 3.0 °		DRWN: MIKEDA01 2023/06/23			
4 PLACES ± 0.2		CHK'D: SAKIYAMA 2023/06/23		PRODUCT CUSTOMER DRAWING	
3 PLACES ± 0.2		APPR: AIDA 2023/06/23			
2 PLACES ± 0.2		INITIAL REVISION:		DOCUMENT NUMBER	
1 PLACE ± 0.2		DRWN: MIKEDA01 2019/11/07		2132250000-SD	
0 PLACES ± 0.2		APPR: KOMURAKAMI 2019/11/20		PSD 000 F	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	SHEET NUMBER
			A3-SIZE	213225	3 OF 6

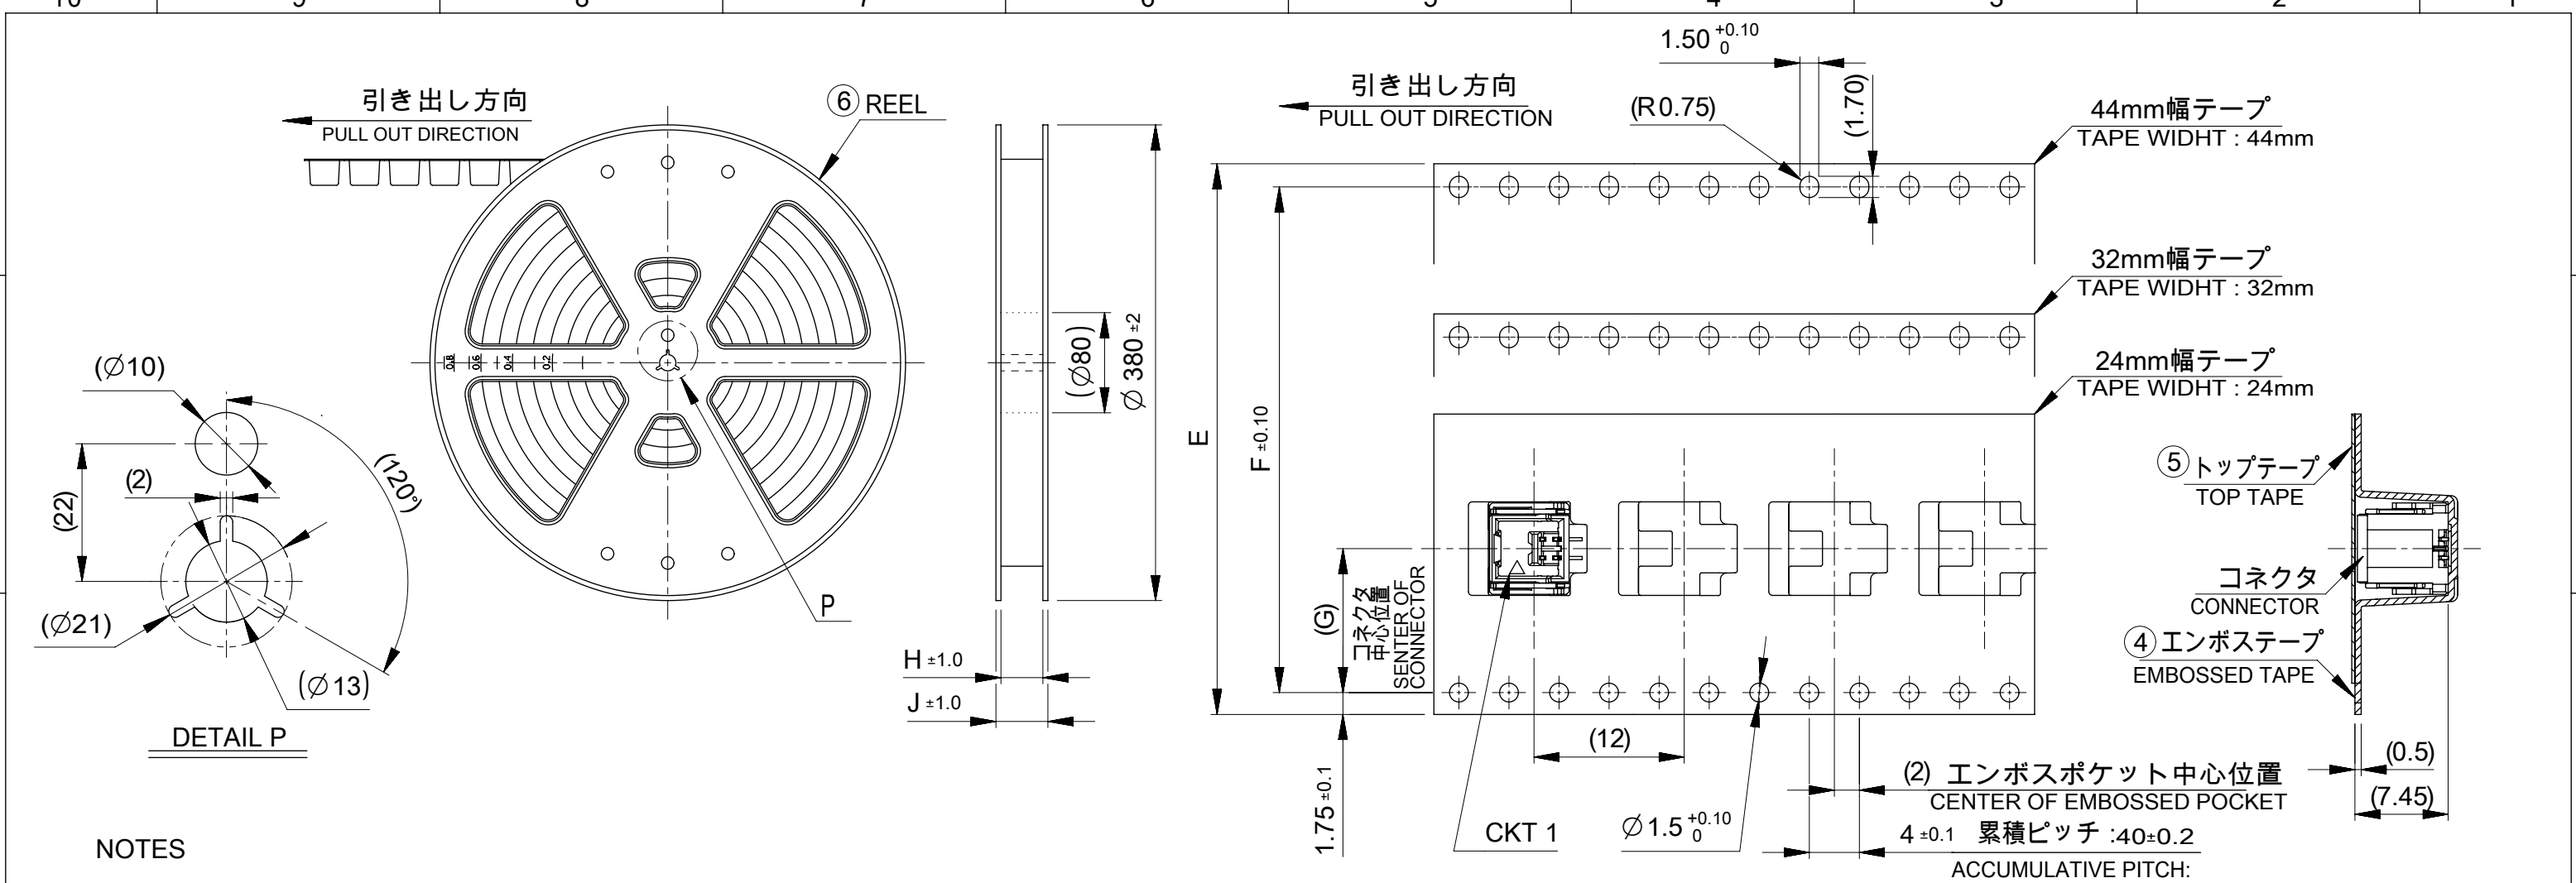

NOTES																																																																																															
5. 梱包数量 : 900個/リール NUMBER OF CONNECTORS : 900 PIECES/REEL																																																																																															
6. リードテープ長さ LEAD TAPE LENGTH																																																																																															
引き出し方向 PULL OUT DIRECTION 部品挿入部 COMPONENT SUPPLIER 末端部(空部) TAIL PART (EMPTY) 100 MIN. 400 MIN. トップテープ接着部(空エンボス) 20 PIECES MIN. TOP TAPE BONDED PART(EMPTY)																																																																																															
7. トップテープの剥離強度はJIS C0806-3に準拠。 TOP TAPE PEELING FORCE IS DEFINED BY JIS C0806-3.																																																																																															
8. 本製品は乾燥剤入り、ハイバリア梱包である。 THIS PRODUCT IS DELIVERD IN HIGH BARRIER PACKAGE WITH DESICCANT.																																																																																															
<table><tr><td></td><td></td><td></td><td></td><td></td><td>15</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>14</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>13</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>12</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>11</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>10</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>9</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>8</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>7</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>6</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>5</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>4</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>3</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>2</td></tr><tr><td>J</td><td>H</td><td>G</td><td>F</td><td>エンボステープ幅E WIDTH OF TAPE</td><td>極数 CKT. NO.</td></tr></table>											15						14						13						12						11						10						9						8						7						6						5						4						3						2	J	H	G	F	エンボステープ幅E WIDTH OF TAPE	極数 CKT. NO.
					15																																																																																										
					14																																																																																										
					13																																																																																										
					12																																																																																										
					11																																																																																										
					10																																																																																										
					9																																																																																										
					8																																																																																										
					7																																																																																										
					6																																																																																										
					5																																																																																										
					4																																																																																										
					3																																																																																										
					2																																																																																										
J	H	G	F	エンボステープ幅E WIDTH OF TAPE	極数 CKT. NO.																																																																																										

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex								
mm		NTS														
GENERAL TOLERANCES (UNLESS SPECIFIED)								EC NO: 742719 DRWN: MIKEDA01 2023/06/23 CHK'D: SAKIYAMA 2023/06/23 APPR: AIDA 2023/06/23								
ANGULAR TOL ± 3.0 °																
4 PLACES		± 0.2		INITIAL REVISION: DRWN: MIKEDA01 2019/11/07 APPR: KOMURAKAMI 2019/11/20				DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION				
3 PLACES		± 0.2						2132250000-SD		PSD	000	F				
2 PLACES		± 0.2		THIRD ANGLE PROJECTION				DRAWING		SERIES		MATERIAL NUMBER	CUSTOMER		SHEET NUMBER	
1 PLACE		± 0.2						A3-SIZE		213225				GENERAL		4 OF 6
0 PLACES		± 0.2														
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS																

番号 NO.	部品 PART	材質 MATERIAL
④	エンボステープ EMBOSSSED TAPE	ポリスチレン(PS) POLYSTYRENE(PS)
⑤	トップテープ TOP TAPE	ポリエチレン、ポリエチレンテレフタレート POLYETHLENE(PE), POLYETHYLENE TEREPTHALATE(PET)
⑥	リール REEL	ポリスチレン(PS) <リサイクル材を含む> POLYSTYRENE(PS) <RECYCLE MATERIAL CONTAINED>

DOCUMENT STATUS	P1	RELEASE DATE	2023/06/23	10:36:34
-----------------	----	--------------	------------	----------

FORMAT: master-lb-prod-A3

3

適用製品及び各種仕様書

APPLICABLE PRODUCTS AND VARIOUS SPECIFICATIONS

梱包仕様書 PACKAGING SPECIFICATION	PART NUMBER	DOCUMENT NUMBER
	213225 ****	2132259200-SPK

適用嵌合相手 MATE WITH	HOUSING	TERMINAL (GOLD PLATING)		
		PLATING THK	#24-28	#28-30
製品番号 PRODUCT NUMBER	502578 ****	0.1 micro-meters	213028 1*00	213029 1*00
		0.38 micro-meters	213028 3*00	213029 3*00
		0.76 micro-meters	213028 7*00	213029 7*00
製品仕様書 PRODUCT SPECIFICATION	5025780004-PS			
アプリケーション仕様書 APPLICATION SPECIFICATION	AS-502578-001			

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex CLIK-MATE 1.5 SINGLE ROW SMT VT TYPE REC ASSY GOLD PLATING PRODUCT CUSTOMER DRAWING					
mm		NTS										
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 742719 DRWN: MIKEDA01 2023/06/23 CHK'D: SAKIYAMA 2023/06/23 APPR: AIDA 2023/06/23								
ANGULAR TOL		±	3.0 °	INITIAL REVISION:			DOCUMENT NUMBER			DOC TYPE	DOC PART	REVISION
4 PLACES		±	0.2	DRWN: MIKEDA01 2019/11/07			2132250000-SD			PSD	000	F
3 PLACES		±	0.2	APPR: KOMURAKAMI 2019/11/20								
2 PLACES		±	0.2									
1 PLACE		±	0.2									
0 PLACES		±	0.2									
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER		SHEET NUMBER	
						A3-SIZE	213225		GENERAL		5 OF 6	

