
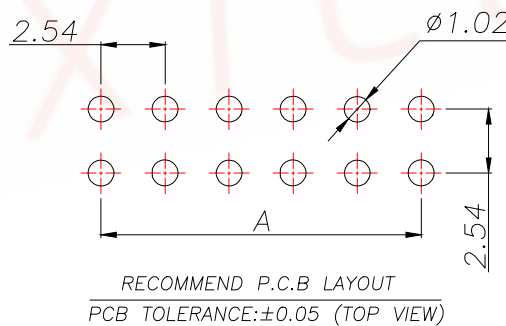
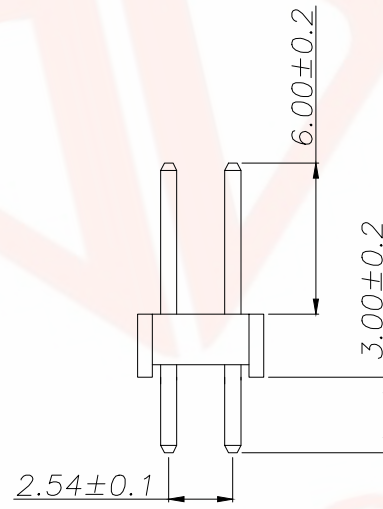


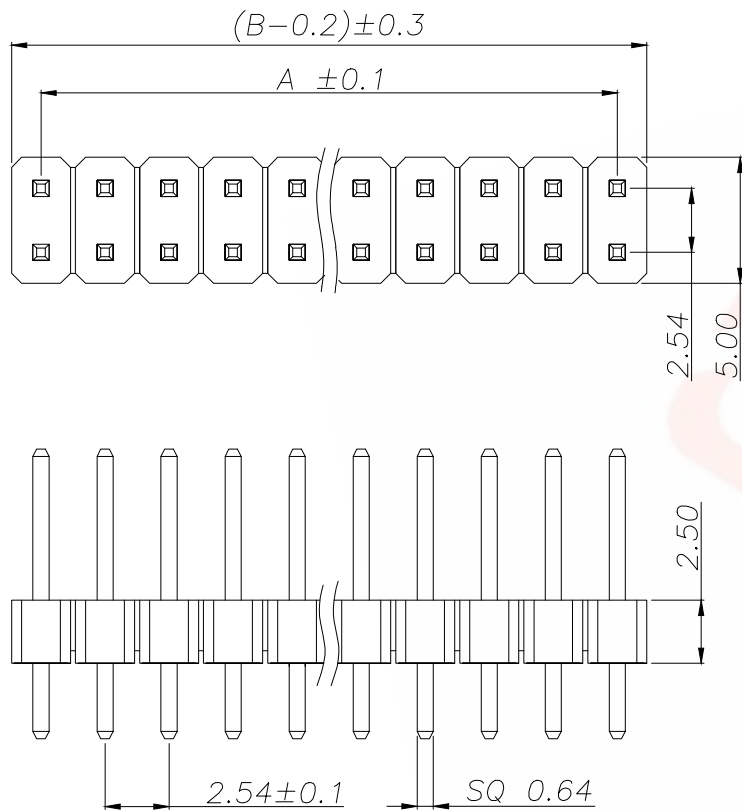

SPECIFICATIONS

Current Rating: 3Amps
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20MΩ Max
Withstanding Voltage: AC 1000V
Operation Temperature: -40° to +105°
Contact Material: Copper Alloy
Standard: PBT
Insulator Material: Polyester(UL 94V-0)
Contact Plating: Gold Flash
Max.Processing Temp: 200°C for 30-60seconds
(220°C for 5seconds)

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

P/N	PIN	DIM.A	DIM.B
PZ2.54-2X1P-H25	2*1	0.00	2.54
PZ2.54-2X2P-H25	2*2	2.54	5.08
PZ2.54-2X3P-H25	2*3	5.08	7.62
PZ2.54-2X4P-H25	2*4	7.62	10.16
PZ2.54-2X5P-H25	2*5	10.16	12.70
PZ2.54-2X6P-H25	2*6	12.70	15.24
PZ2.54-2X7P-H25	2*7	15.24	17.78
PZ2.54-2X8P-H25	2*8	17.78	20.32
PZ2.54-2X9P-H25	2*9	20.32	22.86
.....			
PZ2.54-2X40P-H25	2*40	(40-1)X2.54	(40)X2.54

TOLERANCE		深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd				
X.X ±0.30	X.* ±5°	PART NO. PZ2.54-2XNP-H25	TITLE: 2.54PH H2.5 2xNPin 180# PC3.0 PA6.0 PB2.5 L11.5 PBT	MANUFACTURE DWG		
.XX ±0.20	X.* ±1°					
.XXX ±0.10	X.XX* ±0.5°					
UNITS	mm	DESIGN: Ethan				
MATERILA	— — —	CHED: Olvia	 SCALE SHEET			
FINISH	— — —	APPD: Ava				
				N:A	1/1	