
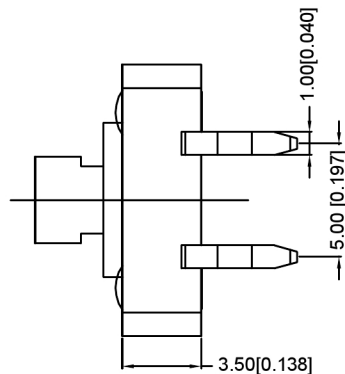
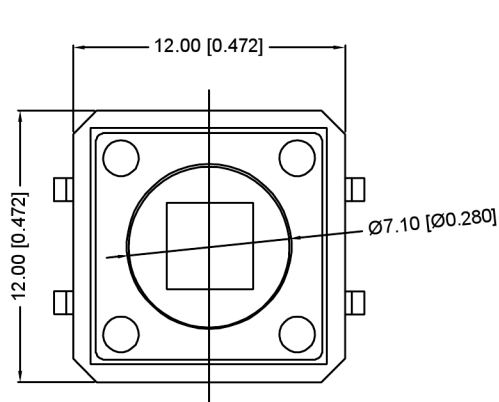
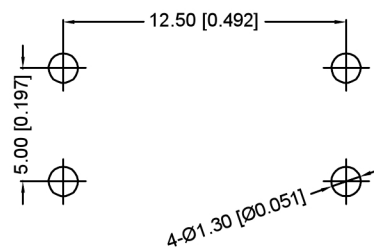


SCHEMATIC CIRCUIT I

SPECIFICATION

Contact Rating: 50mA, 12V DC
Contact Resistance: 100mΩ max
Insulation Resistance: 100mΩ min. 500V DC
Dielectric Strength: 250V AC/1minute
Travel: 0.25mm
Operating Temp: -25°C~+70°C
Storage Temp: -25°C~+70°C

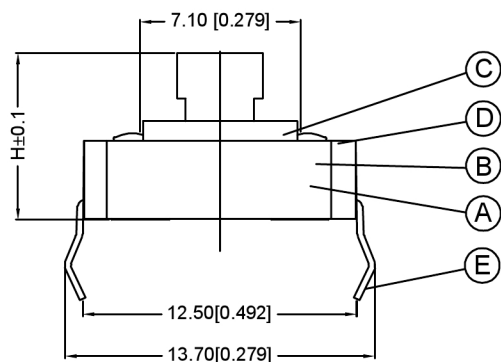

PAPT NO	TC-1103T-X-X
Operating force	B: 160gf C: 260gf
Height	H: 7.3
color	B: Black Y: Yellow

⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	PPA	—	—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	PPA	—	—

ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK
------	-----------	--------	-----	----------	-----------	--------

DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	PART NO.: TC-1103T-X-X
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
KXB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT
			SHEET
			REVISION
			1/1
			A0

广东星坤科技股份有限公司

文件工程章

REVISIONS	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ΔX					ANGLAR ±5°
ΔX					L≤ 4 ±0.2
ΔX					4<L≤ 16 ±0.3
ΔX					16<L≤ 63 ±0.4
ΔX					L> 63 ±0.5