




Connectors > PCB Connectors > Wire-to-Board Connectors > FFC, FPC & Ribbon Connectors > FPC Connectors

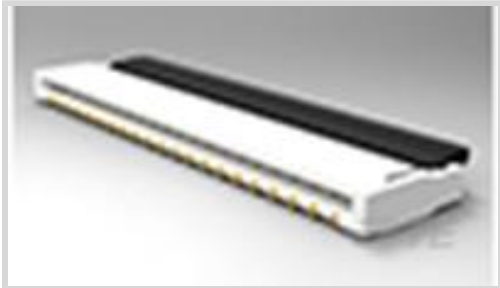

Centerline (Pitch): .3 mm [.012 in]

PCB Mount Orientation: **Right Angle**

Contact Mating Location: **Top**

Termination Method to PCB: **Surface Mount**

FPC Actuator Type: **Back Flip-Lock**

Features

Product Type Features

PCB Connector Assembly Type	PCB Mount Receptacle
Connector Product Type	Connector Assembly
Connector System	Flex-to-Board
Connector & Contact Terminates To	Flexible Printed Circuit (FPC), Printed Circuit Board
FPC Actuator Type	Back Flip-Lock

Configuration Features

Compatible With Wire & Cable Type	FFC, FPC
Number of Rows	1
PCB Mount Orientation	Right Angle
Number of Positions	41

Electrical Characteristics

Operating Voltage	50 VAC
-------------------	--------

Body Features

Actuator Color	Black
Primary Product Color	Natural

Contact Features

PCB Contact Termination Area Plating Material Thickness	.1 µm[3.93 µin]
Contact Layout	Staggered
Contact Type	Socket



Contact Mating Area Plating Material Thickness	.1 µm[3.937 µin]
Contact Shape & Form	Single Beam
PCB Contact Termination Area Plating Material	Gold
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	.2 A
Contact Mating Location	Top
Contact Mating Area Plating Material	Gold

Termination Features

Termination Post & Tail Length	.7 mm[.028 in]
Termination Method to PCB	Surface Mount

Mechanical Attachment

Mating Alignment	With
PCB Mount Alignment	Without
PCB Mount Retention	Without
Connector Mounting Type	Board Mount

Housing Features

Housing Material	Thermoplastic
Centerline (Pitch)	.3 mm[.012 in]

Dimensions

Connector Length	12.8 mm[.504 in]
Accepts Flex Cable Thickness	.2 mm[.008 in]
Connector Height	.9 mm[.035 in]
Connector Width	3.8 mm[.15 in]

Usage Conditions

Operating Temperature Range	-25 – 85 °C[-13 – 185 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Identification Marking

Circuit Identification Feature	Without
--------------------------------	---------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features



Packaging Quantity	3000
Packaging Method	Tape & Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2019 (197) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Customers Also Bought




TE Part #5-520315-3
TRIOMATE ASSY V 3P L=3.556LDFR



TE Part #5-146281-6
06 MODII HDR SRST B/A .100CL



TE Part #2-1445100-8
MICRO MNL HDR ASSY S/ROW LF

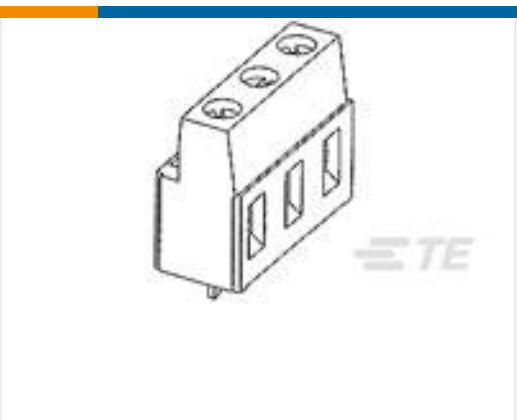


TE Part #282845-3
TERM-BLOK,PCB MNT,90DG,3P,7.62



TE Part #1-1734248-1
1.0 FPC, ZIF V/T, SMT, 11P



TE Part #2118717-2
STD SHIELD COVER, CRS-26.71X26.71X2.00MM

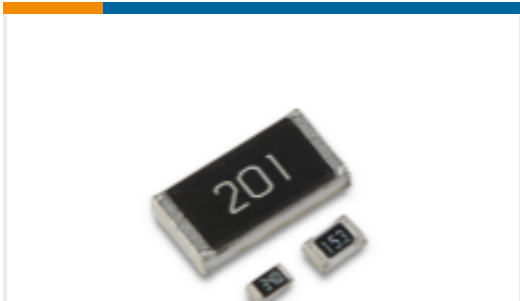

TE Part #3-2176325-8
CRGP 0402 12K 1%



TE Part #3-2176325-1
CRGP 0402 3K3 1%



TE Part #2-1734592-9
FPC CONN. 0.5MM PITCH B/C, 29P



TE Part #1-5435802-7
RIGHT ANGLE DIP SW 6 P SEALED

Documents

CAD Files

Customer View Model

ENG_CVM_CVM_1-2013928-6_G.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-2013928-6_G.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-2013928-6_G.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

8-1773459-2_Fine_Pitch_FPC_conn_QRG

English

Product Specifications

0.3FPC Narrow BF-U (Upper contact type)

Japanese

Product Specification

Japanese

Instruction Sheets

0.3FPC Narrow BF-U

Japanese



Instruction Sheet (non U.S.)

Japanese