

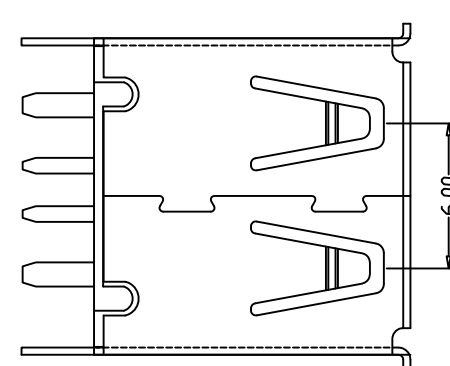
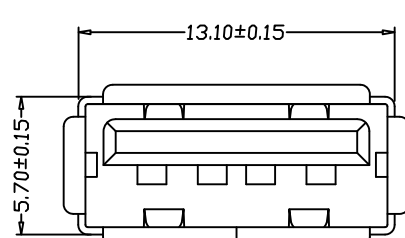
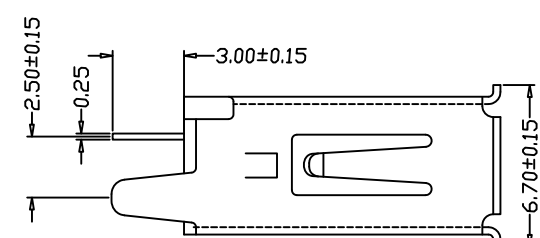


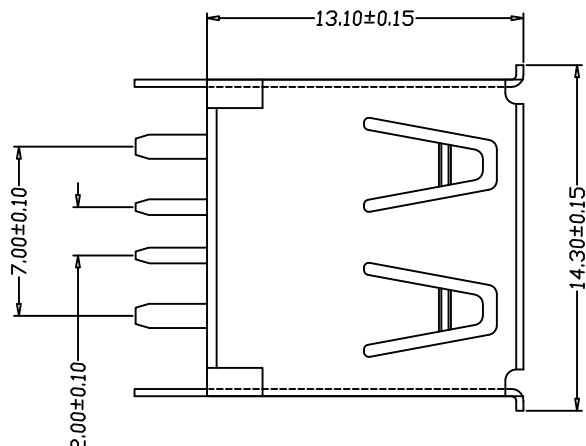

- NOTES:
- 1. HOUSING: SEE NOTES, UL94V-0 .
 - TERMINAL: SEE NOTES.
 - SHELL: SEE NOTES.
- SPECIFICATION:
- 1. ELECTRICAL CHARACTERISTIC:
 - Current rating: 5.0A Max
 - CONTACT RESISTANCE: 30MΩ MAX
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
 - INSULATION RESISTANCE: 1000MΩ MIN
 - 2. MECHANICAL CHARACTERISTIC:
 - INSERTION FORCE: 35N(3.57KGF) MAX
 - EXTRACTION FORCE: 10~35N(1.02~3.57KGF) MIN
 - DURABILITY: 1500 CYCLES EXTRACTION FORCE: 10~35N
 - 5000 CYCLES MIN
 - 5000 CYCLES EXTRACTION FORCE: 3~35N
 - 3. ENVIRONMENTAL:
 - OPERATING TEMPERATURE: -55℃+85℃
 - 4. Contact finish:
 - 01: Selective Gold Flash
 - 02: Selective Gold 3U"
 - 03: Selective Gold 5U"
 - 04: Selective Gold 15U"
 - 05: Selective Gold 30U"

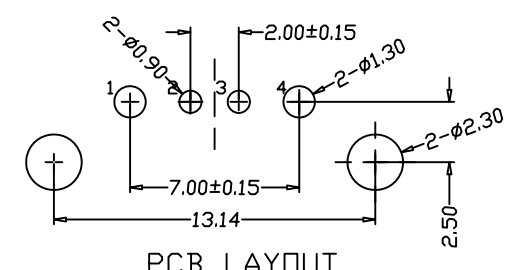

产品图				深圳市精拓金电子有限公司					
PRODUCT CHART DWG									
公差一览表									
TOLERANCE UNLESS OTHERWISE				单位	MM	制图	Z-Y-B	制图料号	916-252A1022Y10210
X.	±0.25	X.	±5.°	UNITS		DRAWING		PRODUCT PART NO.	
.X	±0.20	.X	±2.°	比例	1:1	审核		产品名称	AF大电流13.1直脚180度有边铜壳PBT黑胶/5A
.XX	±0.15	.XX	±1.°	日期	2014.07.24	核准		PRODUCT NO.	
.XXX	±0.10	.XXX	±0.5.°	DATE		APPD		角法	
								版本	AD
								VER	