


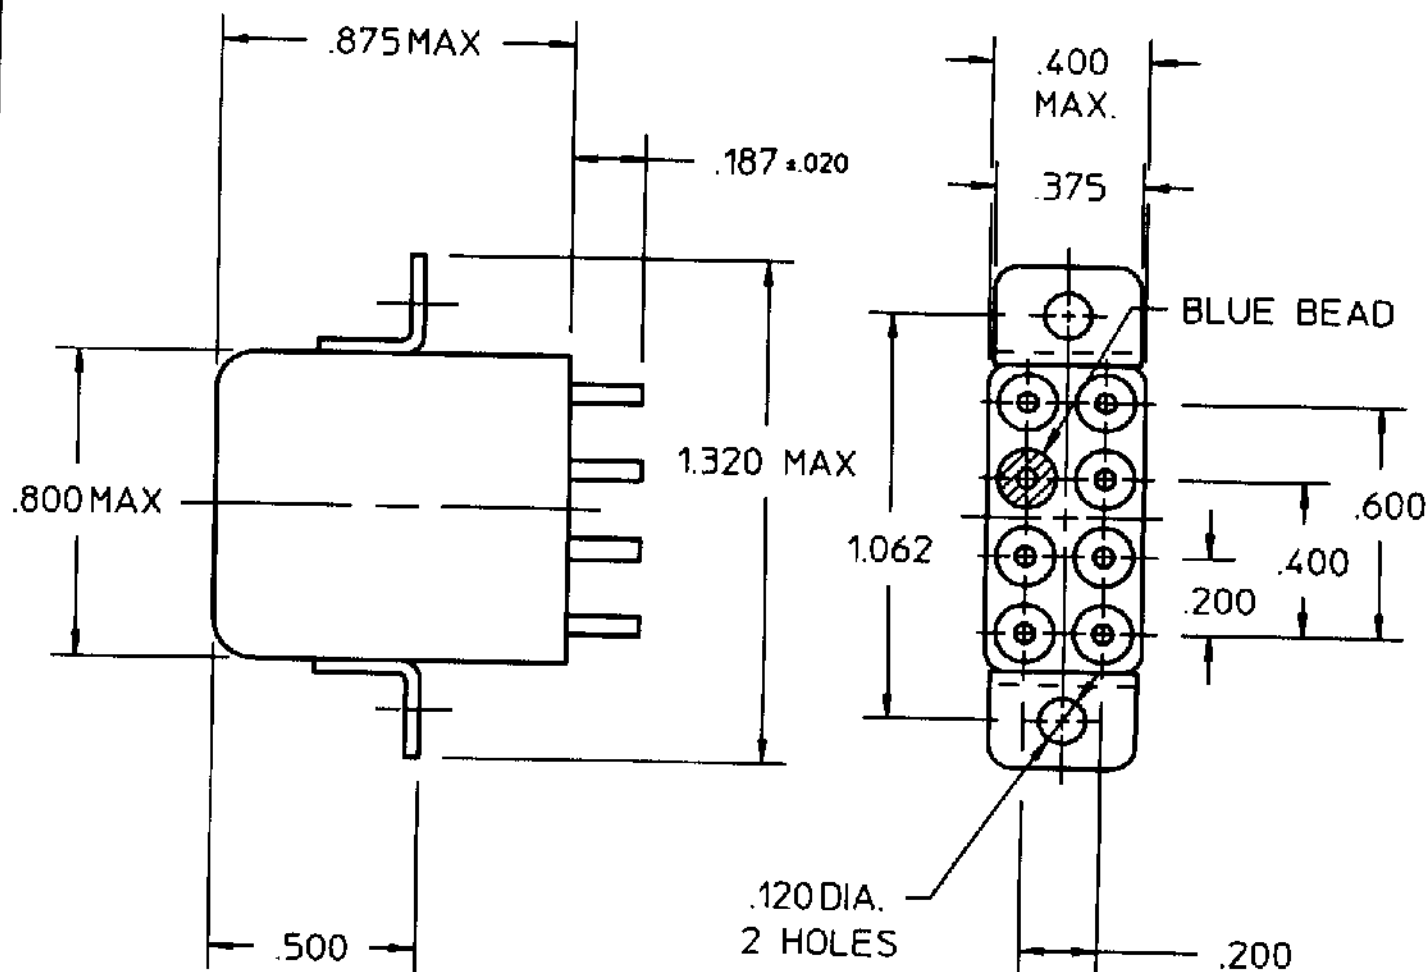


COIL: @ 25°C  
 RESISTANCE 675 OHMS ± 10%  
 NOMINAL VOLTAGE 26.5 VDC  
 MUST OPERATE 13.5 VDC  
 MUST RELEASE 1.47 VDC

ENVIRONMENT:  
 VIBRATION 10 CPS TO 2000 CPS @ 20 DA  
 SHOCK 100 g's 6 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 5 MS MAX  
CONTACT BOUNCE 2 MS MAX

# CUSTOMER DATA SHEET

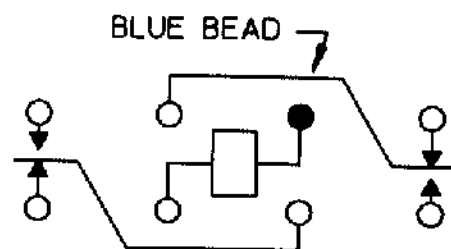

CONTACT RATING: LOW LEVEL TO  
3 AMPS 28 VDC  
RESISTIVE 100,000 OPERATIONS MIN.

DR. R.B. 6/10/93 CK MB 6/10/93

**COMMUNICATIONS  
 INSTRUMENTS, INC.**

CUST. C. I. I. STD.  
 CUST. NO. \_\_\_\_\_

TYPE "RP" RELAY

RP9809G1