


技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: -25° C~+85° C.
3. 额定电压: 50V, AC/DC.
4. 接触电阻: ≤0.02Ω.
5. 绝缘电阻: ≥100MΩ.
6. 额定电流:

适用电线型号: a. AWG#28: 1.0A(per pin)  
 b. AWG#30: 1.0A(per pin)  
 c. AWG#32: 0.8A(per pin)

CKT	DIM A	DIM B	DIM C
2	1.00	2.50	4.00
3	2.00	3.50	5.00
4	3.00	4.50	6.00
5	4.00	5.50	7.00
6	5.00	6.50	8.00
7	6.00	7.50	9.00
8	7.00	8.50	10.00
9	8.00	9.50	11.00
10	9.00	10.50	12.00
11	10.00	11.50	13.00
12	11.00	12.50	14.00
13	12.00	13.50	15.00
14	13.00	14.50	16.00
15	14.00	15.50	17.00
16	15.00	16.50	18.00
17	16.00	17.50	19.00
18	17.00	18.50	20.00
19	18.00	19.50	21.00
20	19.00	20.50	22.00
22	21.00	22.50	24.00
24	23.00	24.50	26.00
26	25.00	26.50	28.00

适用线路板

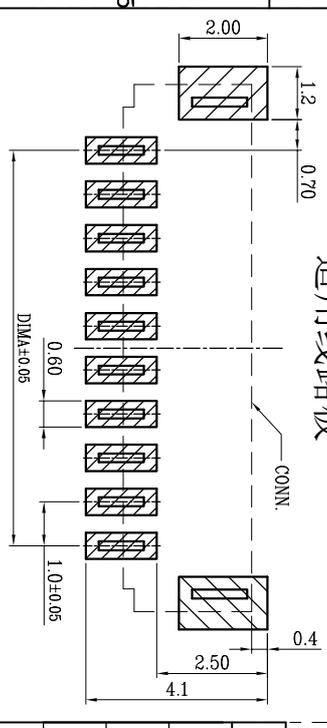

序号	品名	材质
①	1.0- E型卧式带扣WTB胶芯	LCP U94V-0 自然色
②	1.0- E型立式WTB端子	铜合金/表面镀锡
③	1.0- E型卧式WTB铜片	铜合金/表面镀锡
④	1.0- E型立式吸盘	LCP U94V-0 自然色

Wanjunda  
 深圳市万骏达电子有限公司  
<http://www.wanjunda.com>

品名 (ITEM NO) 1.00 Pitch E型立式带扣WTB  
 料号 (PART NO) WF-SH1.0-nP-LTK

模号 (MODEL NO)

图号 (DWG NO)  
 版本 (REV)  
 日期 (DATE)  
 设计 (DESIGN)  
 审核 (CHECKED)  
 核准 (APPROVED)

单位 (UNIT): MM  
 比例 (SCALE): 1:1

公差 (TOLERANCE) 未注公差  
 INSPRIFIED X.X ±0.30  
 X.XX ±0.20  
 X.XXX ±0.10  
 X.XX ±0.05  
 X.X ±0.02