


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.12	阿树

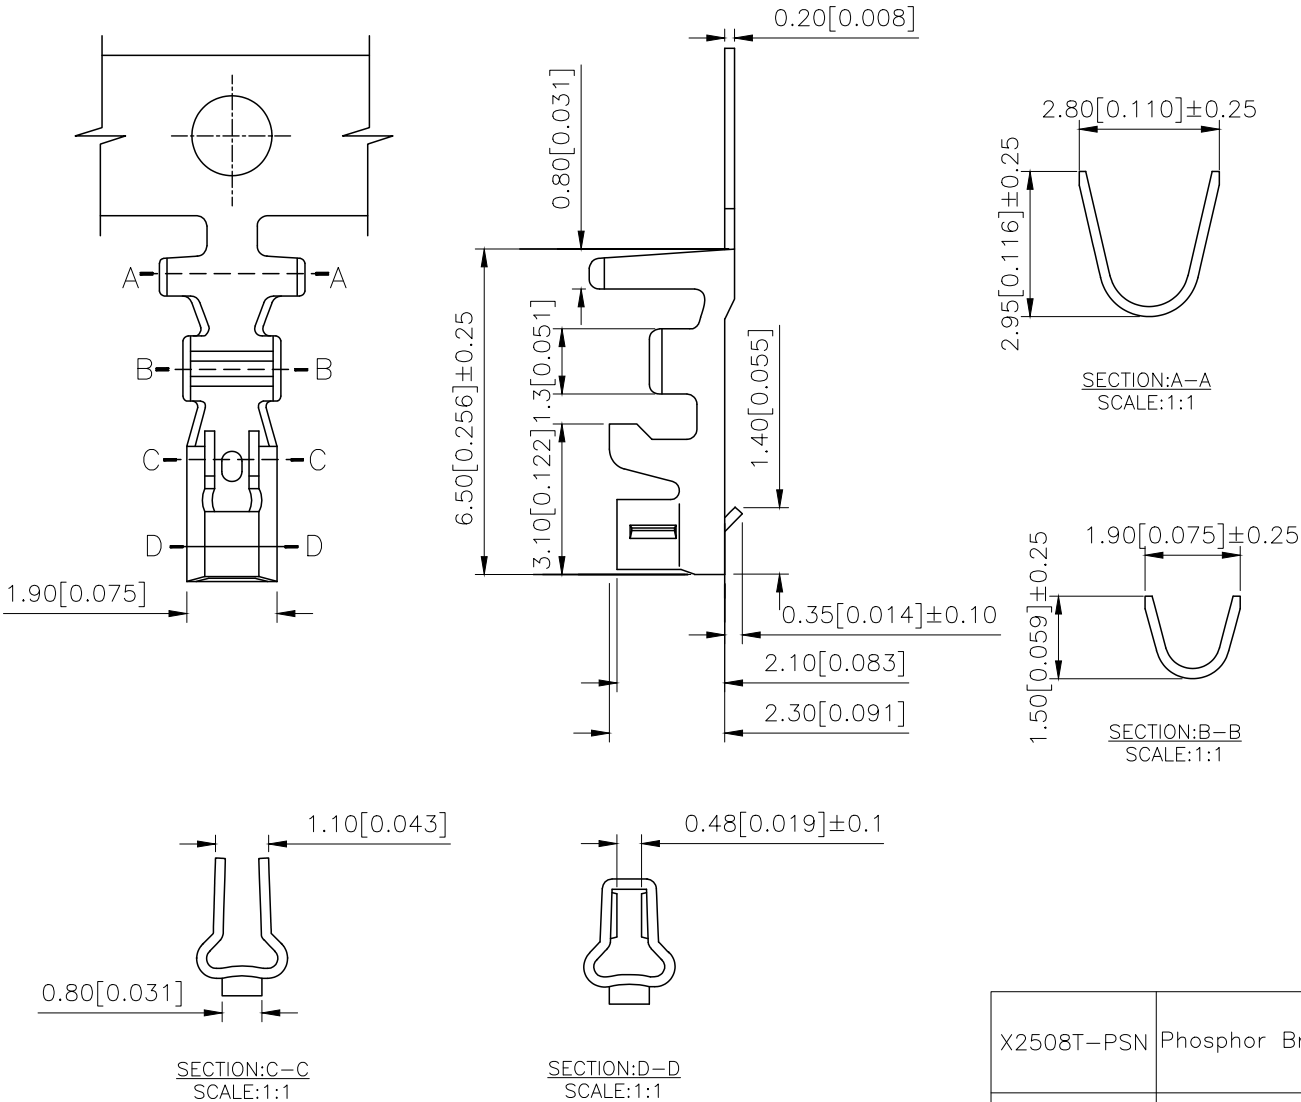

- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:3A AC/DC
 - Withstanding Voltage:1500V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥500MΩ
 - Contact resistance:≤10mΩ
 - After environmental testing:≤20mΩ
 - Mark "*"Indicate Dimensions Need To Controlled In Emphasis

X2508 I X-P SN X-X
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No.
②Category: T-Terminal
③Appearance type: Blank-Ordinary
④Material: P-Phosphor bronze
B-Brass
⑤Plating Style: G**-Gold Plated Contact
V**- All Gold-Plated
01-Gold Flash 02-2u" 03-3u"
05-5u" 10-10u" 15-15u"
SN-Bright Tin Plating
SN1-Bright Tin Plating
0-No Plating Material
SW- Fog Tin Plating
⑥Plating Method :Blank-Stamping before Plating
B-Plating before stamping
⑦Mold No./Mark/Special No

X2508T-PSN	Phosphor Bronze	AWG#20-28	1.90mm(Max)	Stamping Before Plating:30~50u" Ni;70~120u"S _n	X2508H
PART NO	Material	Wire Range	Insulation O.D.	Finish	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	2.50mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X2508T-PSN
APPROVED		SIZE:	A4	DWG NO.:	