


DATASHEET

C1206X7R500-684MNE

GENERAL PURPOSE CERAMIC CAPACITORS (C SERIES)
1206, X7R, 50V, 0.68uF, $\pm 20\%$, 100% matte Tin(Sn) over Nickel



VENKEL LTD.

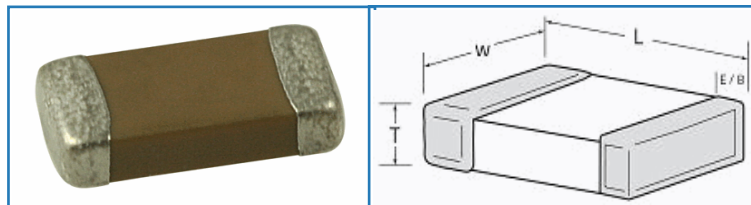

SIZE SPECIFICATIONS units: inches

Length:	0.126
Width:	0.063
T(max):	0.070
Min E/B:	.020 $\pm$.01
Size(EIA):	1206

COMPONENT SPECIFICATIONS

Category:	Ceramic Capacitors
Series:	General Purpose (C Series)
Size:	1206
Dielectric:	X7R
Voltage:	50V
Capacitance:	0.68uF
Tolerance:	$\pm 20\%$
Termination:	100% matte Tin(Sn) over Nickel
Packaging:	E
Quantity per Reel:	2,000

DIELECTRIC SPECIFICATIONS

Temperature Coefficient:	0 $\pm 15\%$ $^{\circ}\text{C}$ MAX
Temperature Voltage Coefficient	X7R not applicable
Ageing:	2.5% per decade hour, typical
Withstanding Voltage:	2.5 times VDCW
Operating Temp:	-55 $^{\circ}\text{C}$ to +125 $^{\circ}\text{C}$
Dissipation Factor:	See C Series Datasheet

ENVIRONMENTAL INFORMATION

RoHS Status	6 of 6 Compliant
REACH Status	Compliant
Halogen Status	Halogen Free
Conflict Mineral Status	Conflict Mineral Free
Moisture Sensitivity Level	MSL1

REFLOW PROFILE

Max Reflow Temperature	260 $^{\circ}\text{C}$
Number of Reflow Cycles	2
Time at Max Reflow Temp.	10 sec

REEL DIMENSIONS units: mm

Tape	B min	C	A(7")	A(13")	D Min	N Min	G	T max
8mm	0.30	13 $\pm$.05	178 $\pm$ 2.0	330 $\pm$ 2.0	20.20	50.00	10 $\pm$ 1.5	14.90

TAPING SPECIFICATIONS units: mm

A	B	W	F	E	Po
2.0 $\pm$ 0.2	3.6 $\pm$ 0.2	8.0 $\pm$ 0.2	3.5 $\pm$ 0.1	1.75 $\pm$ 0.1	4.0 $\pm$ 0.1
Pz	D	T	P	To	T(E)
2.0 $\pm$ 0.05 - 0.0	1.5 $\pm$ 0.1 - 0.0		4.0 $\pm$ 0.1	2.5 MAX	0.6 MAX