

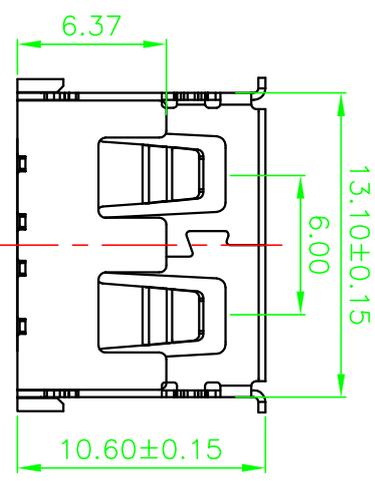
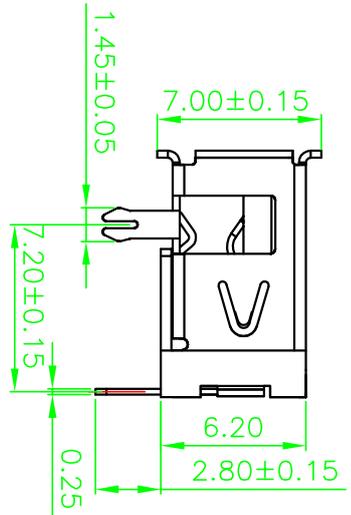
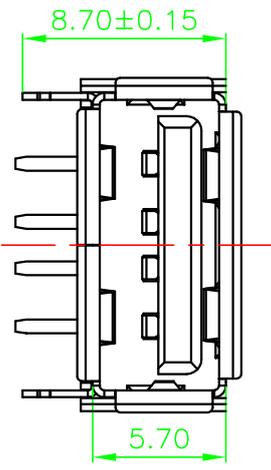
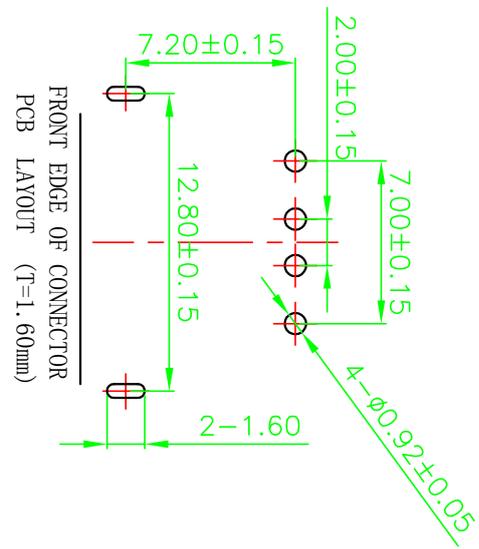


REVISIONS			
SYM	ECN No.	MODIFICATION	DATE ISSUED

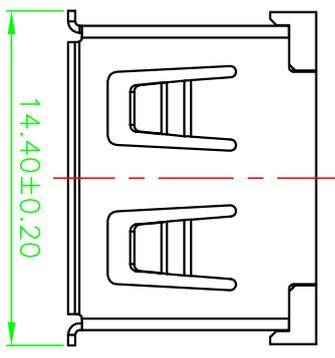

1	912-111A1011D10100	5
2		6
3		7
4		8

- Note:
- Material:
 - Housing: High temperature thermoplastic with/black G/F,UL94V-0
 - Contact: copper alloy,t=0.25mm
 - Shell: copper/Ferroalloy alloy,t=0.30mm
 - Specification:
 - Current rating:1.5A Max.
 - Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - Contact resistance: 30 mΩ Max.
 - Insulation resistance: 100 MΩ Min.
 - Total mating force: 3.57 Kgf Max.
 - Total unmating force: 1.0 Kgf Min.
 - Finish:
 - Contact: Plated Gold in Mating Area; Tin On Solder Tails
 - Shell: Nickel Plating
 - Environmental:
 - Temperature range: -55°C~85°C

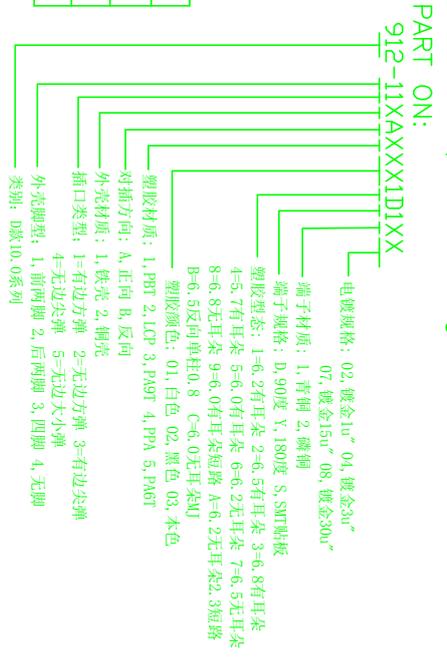

研 深圳市精拓金电子有限公司

DRAWN		TITLE		PART NO.	
CHECKED		AF10. 6D款前两脚有边方弹		912-112A1011D10100	
APPROVED		铜壳PBT白胶6. 2DIP		DRAWING NO.	
				R912111A1011D102	
TOLERANCE		SCALE		SHEET	
.XXX±.10, .XX±.20, .X±.25, ANG±5°		1:1		1 OF 1	
UNIT		SIZE		REV.	
mm		A4		X1	



1 2 3 4 5 A B C D E

1 2 3 4 5