



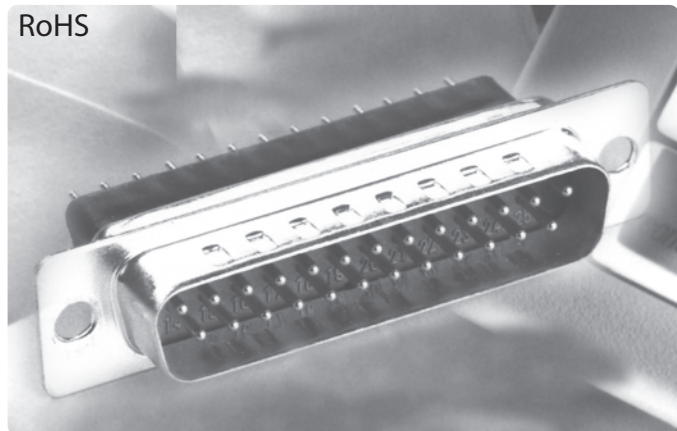

K88X Series Vertical PCB Mount High Profile

K88X Series Dimensions

Dimensions in mm

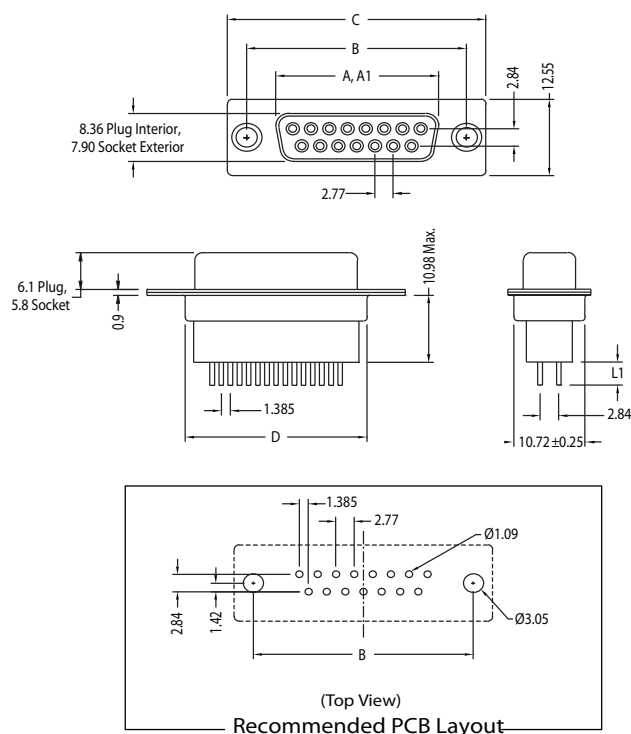

Number of Contacts (Shell Size)	Dimensions (mm)				
	A	A1	B	C	D
9 (E)	16.33	16.92	24.99	30.81	19.18
15 (A)	24.66	25.25	33.32	39.14	27.51
25 (B)	38.38	38.96	47.04	53.04	41.00
37 (C)	54.84	55.42	63.50	69.32	57.71

A = Exterior of Female Shell (S) A1 = Interior of Male Shell (P)

[Click Here For Performance Specifications](#)

D-SUBMINIATURE CONNECTORS

K88X Series

Ordering Information

Series	Shell Type	Pin Length	Contact Option	Contact Type	Mounting/ Jack Screw Option	Plating Option
--------	------------	------------	----------------	--------------	-----------------------------	----------------

Series

K88X - D-Subminiature Vertical Connector

Shell Type and Contact Option

E - 9 Contacts

A - 15 Contacts

B - 25 Contacts

C - 37 Contacts

Pin Length (L1)

D - 3.80mm

Mounting and Jack Screw Option

Blank - Thru Hole


BR - (4-40) Tin Plated 11.00mm long Boardlocks

BRJ - (4-40) Boardlocks and (4-40) Hex Jack Screws

K - (4-40) Bushings

KJ - (4-40) Bushings and (4-40) Hex Jack Screws

R - Round Riveted Jack Screws

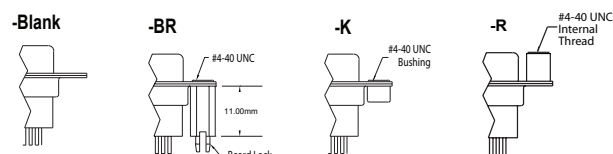

Contact Type

P - Pin Contact (Plug)

S - Socket Contact (Receptacle)

Plating Option

Blank - Gold Flash

15 - 15μ" Gold

30 - 30μ" Gold

Contact Kycon for other options

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kycon:](#)

[K88X-AF-15S-K](#)