

General Specifications

Motor Protection:

Auto Restart/Polarity Protection

Insulation Resistance:

10M Ω or over with a DC500V Megger

Dielectric Withstand Voltage: AC 700V 1s

Allowable Ambient Temperature Range:

-10°C ~ +70°C (Operating)

-40°C ~ +70°C (Storage)

(non-condensing environment)

Expected Life

Failure Rate: 10%

60°C 40,000 Hours

Material

Casing : Plastic (Black) UL94V-0


Impeller : Plastic (Black) UL94V-0

Bearing : Ball Bearing


Lead Wire : UL3385, AWG26, +Red, -Black

Panel Cut-Outs


Units: $\frac{\text{inch}}{(\text{mm})}$

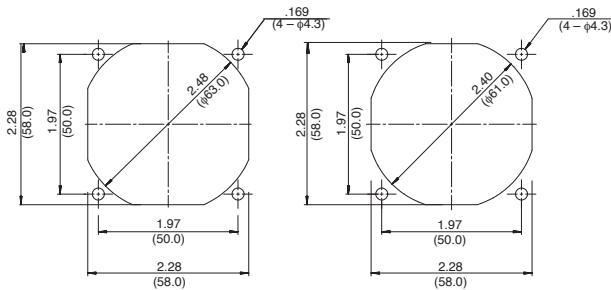

Characteristic Curves

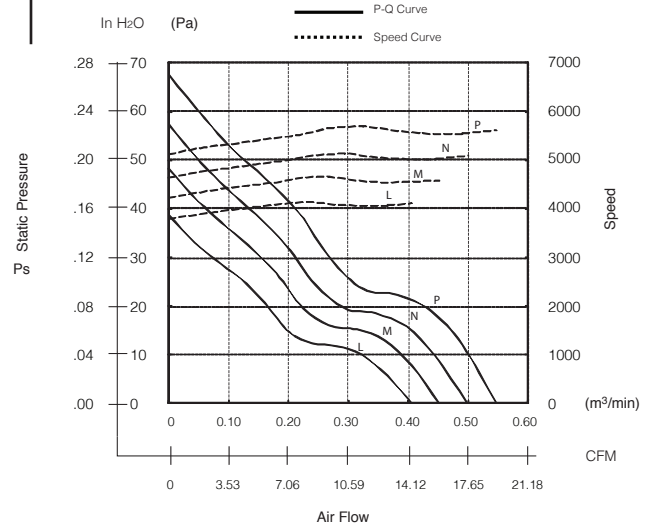

Outline

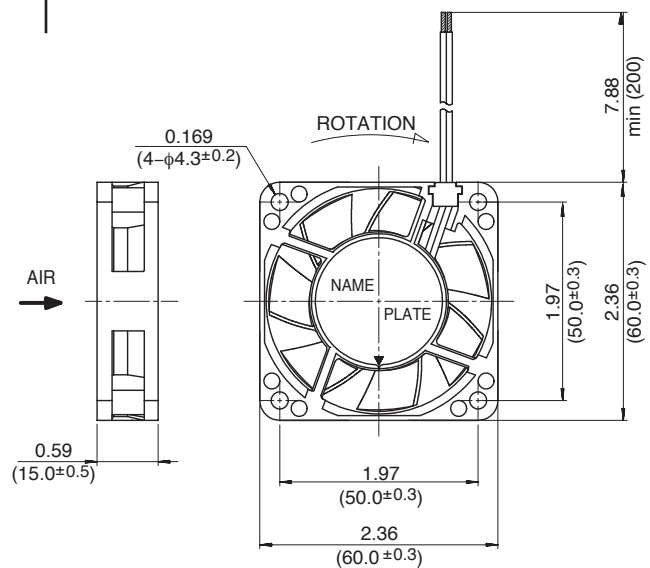

Specifications

MODEL	Rated Voltage	Operating Voltage	Current	Input Power	Speed	Max. Air Flow		Max. Static Pressure		Noise	Mass
	(V)	(V)	(A)*1	(W)*1	(min ⁻¹)*1	CFM*1	(m ³ /min)*1	in H ₂ O	(Pa)*1	(dB)*1	(g)
06015VA-12L-AA-00	12	6.0 ~ 13.8	0.08	0.96	4100	14.5	0.41	0.16	38.8	28.5	55
06015VA-12M-AA-00	12	6.0 ~ 13.8	0.11	1.32	4600	15.9	0.45	0.19	48.3	31.0	55
06015VA-12N-AA-00	12	6.0 ~ 13.8	0.12	1.44	5100	17.6	0.50	0.23	57.5	33.5	55
06015VA-12P-AA-00	12	6.0 ~ 13.8	0.13	1.56	5600	19.4	0.55	0.27	67.7	36.5	55
06015VA-24L-AA-00	24	10.0 ~ 27.6	0.04	0.96	4100	14.5	0.41	0.16	38.8	28.5	55
06015VA-24M-AA-00	24	10.0 ~ 27.6	0.05	1.20	4600	15.9	0.45	0.19	48.3	31.0	55
06015VA-24N-AA-00	24	10.0 ~ 27.6	0.06	1.44	5100	17.6	0.50	0.23	57.5	33.5	55
06015VA-24P-AA-00	24	10.0 ~ 27.6	0.07	1.68	5600	19.4	0.55	0.27	67.7	36.5	55
06015VA-24Q-AA-00	24	10.0 ~ 26.4	0.08	1.92	6100	21.2	0.60	0.30	75.4	40.0	55

Rotation: Clockwise

Airflow Outlet: Air Out Over Struts

*1: Average Values in Free Air

Note: Locked Rotor/Tach Available

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NMB Technologies:

[2406VL-04W-B69-B50](#) [2406VL-05W-B49-B50](#) [2406VL-05W-B60-B00](#) [2406VL-05W-B39-B50](#) [2406VL-04W-B49-B50](#)
[2406VL-04W-B69-B00](#) [2406VL-05W-B69-B00](#) [2406VL-04W-B40-B00](#) [2406VL-05W-B69-B50](#) [2406VL-05W-B59-B50](#)
[2406VL-04W-B49-B00](#) [2406VL-05W-B59-B00](#) [2406VL-05W-B49-B00](#) [2406VL-04W-B50-B00](#) [2406VL-05W-B40-B00](#)
[2406VL-04W-B60-B00](#) [2406VL-05W-B30-B00](#) [2406VL-05W-B50-B00](#) [2406VL-04W-B39-B00](#) [2406VL-04W-B59-B50](#)
[2406VL-04W-B30-B00](#) [2406VL-04W-B39-B50](#) [2406VL-04W-B59-B00](#) [2406VL-05W-B39-B00](#) [06015VA-24M-AL-00](#)
[06015VA-12P-AA-00](#) [06015VA-12P-AT-00](#) [06015VA-24N-AL-00](#) [06015VA-12N-AA-00](#) [06015VA-12N-AL-00](#)
[06015VA-12L-AL-00](#) [06015VA-12L-AA-00](#) [06015VA-12L-AT-00](#) [06015VA-24L-AL-00](#) [06015VA-24P-AL-00](#) [06015VA-](#)
[24N-AA-00](#) [06015VA-24N-AT-00](#) [06015VA-24P-AA-00](#) [06015VA-12P-AL-00](#) [06015VA-24M-AT-00](#) [06015VA-12M-AL-](#)
[00](#) [06015VA-24P-AT-00](#) [06015VA-12M-AT-00](#) [06015VA-24M-AA-00](#) [06015VA-24L-AT-00](#) [06015VA-24L-AA-00](#)
[06015VA-12M-AA-00](#) [06015VA-12N-AT-00](#) [06015VA-12K-AA-00](#) [06015VA-12K-AL-00](#) [06015VA-24P-CA-00](#)