


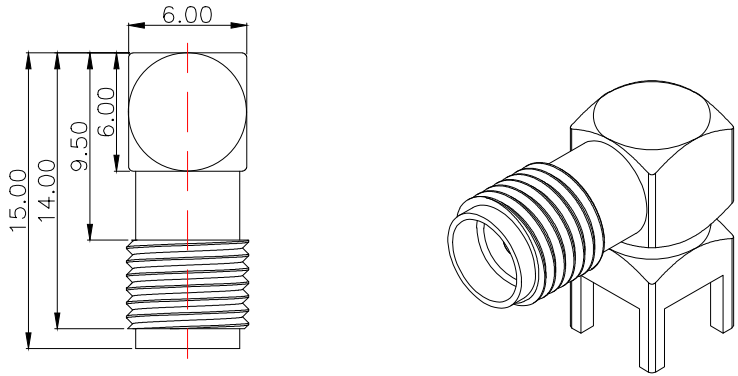
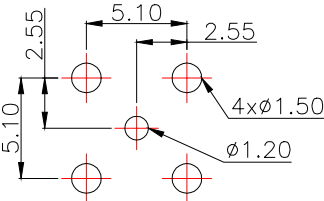
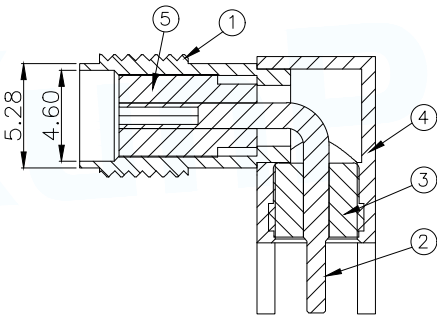


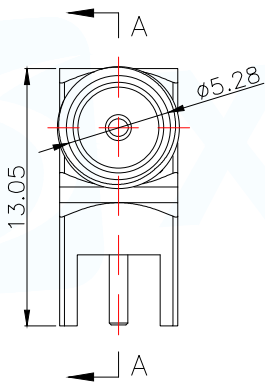

Technical requirements	
Characteristic impedance	50Ω
Frequency range	0-6GHZ
Contact resistance	
Inner conductor	≤3mΩ
Outer conductor	≤2mΩ
Insulated resistance	>5000MΩ
Salt spray time	48H
Separation force	≥0.28N
Appearance: no shift point burr scratch surface bright, no dirt, no deformation, etc	

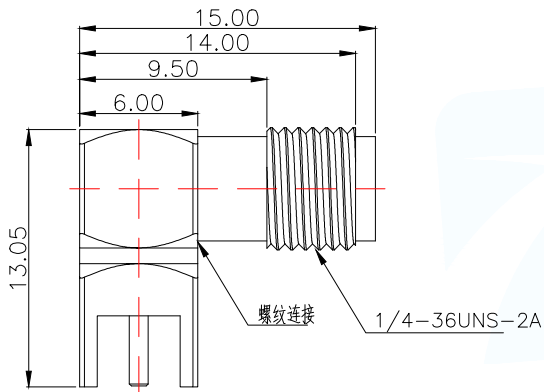

PCB.WELDING DRAWING (TOLERANCE:±0.05)

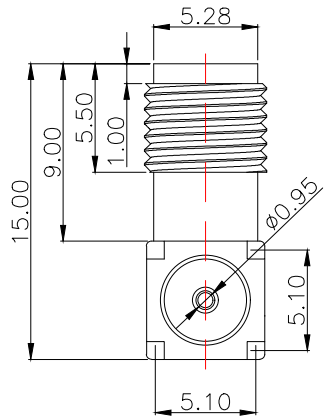

1	半螺铜套	1	黄铜	镀金
2	母针	1	黄铜	镀金
3	绝缘体1	1	PTFE	
4	铜座	1	黄铜	镀金
5	绝缘体2	1	PTFE	
序号	名称	数量	材料	备注
MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:	ANGLES:	TITLE: 弯头—半螺内孔—H13*15—LW PAR SMA-KWE-324-H13X15-LW DWN CHKD APVD SCALE N:A UNIT:MM SIZE:A4 SHEET:1F1		
X.X±0.30	X.*±5°			
X.XX±0.25	X.X*±1°			
X.XXX±0.15				
CUSTOMER COPY		REV:A		