

2200740

https://www.phoenixcontact.com/us/products/2200740

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



DIN rail housing, Lower housing part with metal foot catch, tall design, with vents, width: 22.6 mm, height: 99 mm, depth: 107.3 mm, color: light gray (similar RAL 7035), cross connection: integrated bus connector, number of positions cross connector: 10+2, Bus connector: 10 parallel contacts, 2 serial contacts

### Your advantages

- · Tool-free mounting
- Available in overall widths from 12.5 mm ... 90 mm, modular extension is possible
- · Flammability rating V0 in accordance with UL 94
- · Variety of connection technology
- · Can be mounted on the DIN rail
- With integrated or DIN-rail-mountable bus connector as an option

#### Commercial data

Item number	2200740
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	AC08
Product key	ACHAAB
GTIN	4046356666909
Weight per piece (including packing)	58.28 g
Weight per piece (excluding packing)	58.28 g
Customs tariff number	85472000
Country of origin	DE



2200740

https://www.phoenixcontact.com/us/products/2200740

### Technical data

#### Notes

Assembly note	Refer to the data sheet for the range in the download area.
Recommendation	Material of contact pads for bus connector, galvanic gold (hard gold)

#### Product properties

Product type	Enclosure bottom part
Housing type	DIN rail housing
Housing series	ME
Product family	ME 22,5
Туре	Lower housing parts with vents, housing cover necessary to complete the module
Number of positions	16
	4
Max. number of positions	0)
Туре	Lower housing part with metal foot catch, tall design
Ventilation openings present	yes

#### Data management status

Article revision	05

#### **Dimensions**

Dimensional drawing	d
Width	22.6 mm
Height	99 mm
Depth	107.3 mm
Depth from top edge of DIN rail	100.7 mm
Depth from top edge of DIN rail to support point on upper part	68.5 mm
PCB design	
PCB thickness	1.4 mm 1.8 mm

#### Material specifications

Color (Housing)	light gray (RAL 7035)	
Flammability rating according to UL 94	V0	
CTI according to IEC 60112	600	



2200740

https://www.phoenixcontact.com/us/products/2200740

Housing material	Polyamide
Surface characteristics	untreated
nvironmental and real-life conditions	
Power dissipation single housing for 20 °C	
Ambient temperature	20 °C
Reduction factor	1
Mounting position	vertical
Power dissipation	6.1 W
Power dissipation single housing for 30 °C	
Ambient temperature	30 °C
Reduction factor	0.91
Mounting position	vertical
Power dissipation	5.5 W
Power dissipation single housing for 40 °C	
Ambient temperature	40 °C
Reduction factor	0.81
Mounting position	vertical
Power dissipation	4.9 W
Power dissipation single housing for 50 °C	
Ambient temperature	50 °C
Reduction factor	0.7
Mounting position	vertical
Power dissipation	4.3 W
Power dissipation single housing for 60 °C	
Ambient temperature	60 °C
Reduction factor	0.57
Mounting position	vertical
Power dissipation	3.5 W
Power dissipation single housing for 70 °C	
Ambient temperature	70 °C
Reduction factor	0.49
Mounting position	vertical
Power dissipation	3.1 W
Vibration test	
Specification	IEC 60068-2-6:2007-12
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.15 mm (10 Hz 58.1 Hz)
Acceleration	2g (58.1 Hz 150 Hz)



2200740

https://www.phoenixcontact.com/us/products/2200740

Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis
slow-wire test	
Specification	IEC 60695-2-11:2014-02
Temperature	850 °C
Time of exposure	30 s
hermal stability / ball thrust test	
Specification	IEC 60695-10-2:2014-02
Temperature	125 °C
Test duration	1 h
Force	20 N
dechanical etropath / tumbling barrol	
lechanical strength / tumbling barrel Specification	IEC 60998-1:2002-12
Height of fall	50 cm
Frequency	10
. 1	
hocks	
Specification	IEC 60068-2-27:2008-02
Pulse shape	Half-sine
Acceleration	15g
Shock duration	11 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
egree of protection (IP code)	
Specification	IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08
mbient conditions	
Max. IP code to attain	IP20
Ambient temperature (operation)	-40 °C 105 °C (depending on power dissipation)
Ambient temperature (storage/transport)	-40 °C 55 °C
Ambient temperature (assembly)	-5 °C 100 °C
Relative humidity (storage/transport)	80 %
B data	
Number of PCB holders	1
Type of PCB mount	Insertion (optional latching by PCB stop)
Thickness of the PCB	1.4 mm 1.8 mm
THORICOS OF THE FOLI	1. <del>7</del> (1111 1.0 Hill)
unting	
Mounting type	DIN rail mounting
Mounting type	
ckaging specifications	



2200740

https://www.phoenixcontact.com/us/products/2200740

Outer packaging type	Carton
----------------------	--------




2200740

https://www.phoenixcontact.com/us/products/2200740

### Drawings

### Dimensional drawing

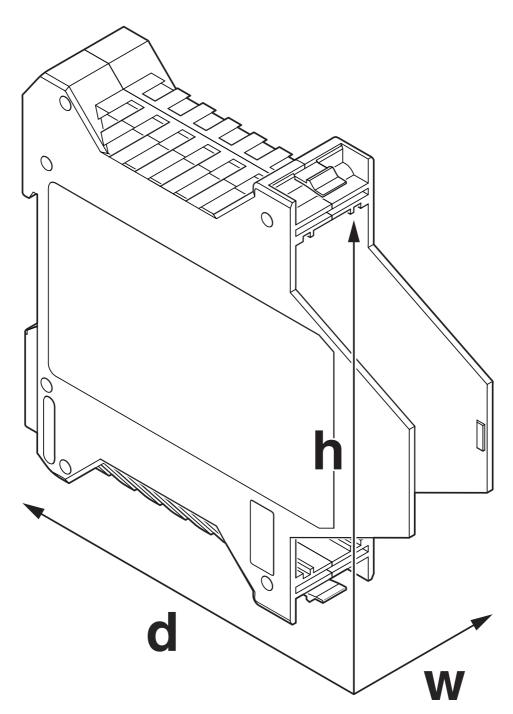

Schematic figure for illustrating the item dimensions. The figure is not of the desired product. For further details, refer to the product drawings in the "Downloads" tab.



2200740

https://www.phoenixcontact.com/us/products/2200740

### **Approvals**

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/2200740

cUL Recognized Approval ID: FILE E 60425				
	Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
Use group B				
	300 V	8 A	-	-
Use group D				
	300 V	8 A	-	-

UL Recognized Approval ID: FILE E 60425				
	Nominal voltage $U_N$	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
Use group B				
	300 V	8 A	-	-
Use group D				
	300 V	8 A	-	-

cULus Recognized



2200740

https://www.phoenixcontact.com/us/products/2200740

### Classifications

#### **ECLASS**

	ECLASS-11.0	27182702
	ECLASS-13.0	27190601
	-1A 4	
ΕI	TIM	
	ETIM 9.0	EC002779
UI	NSPSC	
-		
	UNSPSC 21.0	31261500



2200740

https://www.phoenixcontact.com/us/products/2200740

### Environmental product compliance

#### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com