
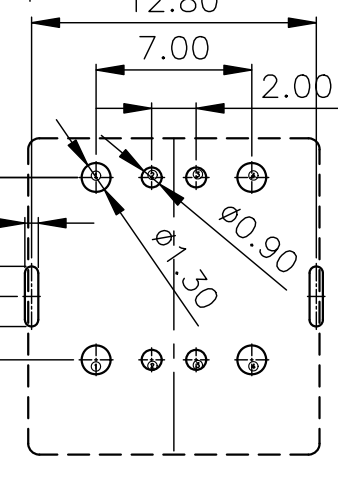
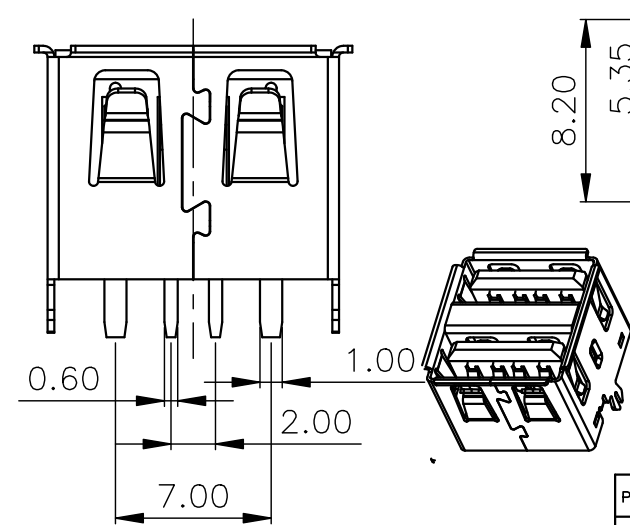


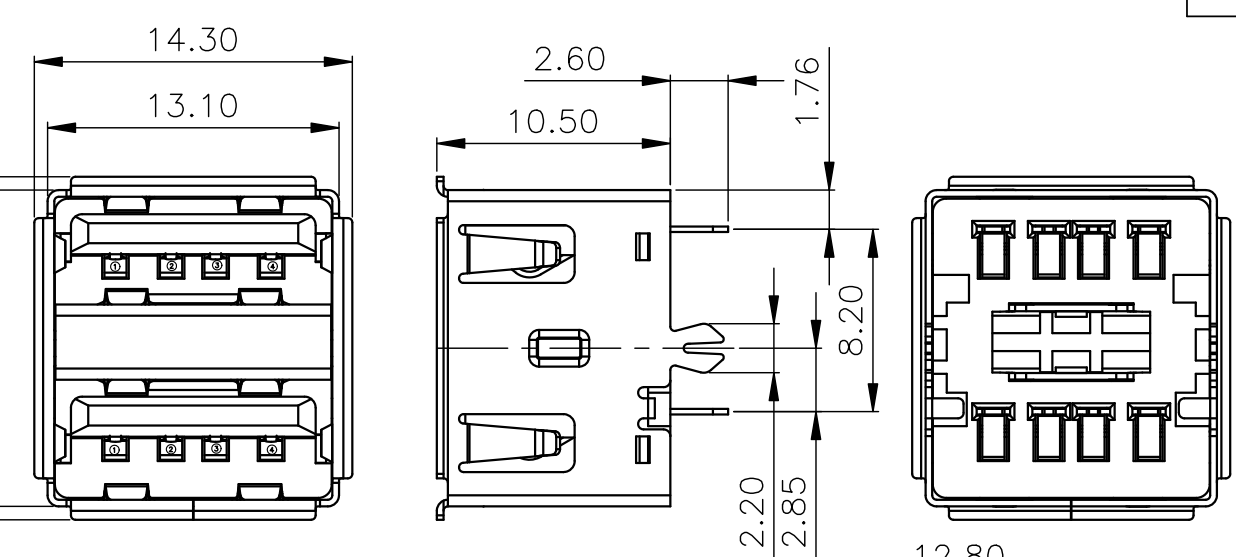

P. C. B LAYOUT

Note:
1.Material:
1.1,Housing: High temperature thermoplastic with/black G/F,UL94v-0
1.2,Contact: copper alloy,t=0.25mm
1.3,Shell: copper/Ferroalloy alloy,t=0.30mm
2.Specification:
2.1,Current rating:1.5A Max.
2.2,Dielectric withstanding voltage: 100 V(ac) for 1 min.
2.3,Contact resistance: 30 mΩ Max.
2.4,Insulation resistance: 100 MΩ Min.
2.5,Total mating force: 3.57 Kgf Max.
2.6,Total unmating force: 1.0 Kgf Min.
3.Finish:
3.1,Contact: Plated Golg in Mating Area: Tin On Solder Talls
Shell: Nickel Plating
4.Environmental:
4.1,Temperature range: -55°C~85°C

- PART ON:
- 907-222AXXX1Y1XX
 - 电镀规格: 02, 镀金1u" 04, 镀金3u" 07, 镀金15u" 08, 镀金30u"
 - 端子材质: 1, 青铜 2, 磷铜
 - 端子规格: D, 90度 Y, 180度 S, SMT贴板
 - 塑胶型态: 1, 双层短体 2, 双层半包
 - 塑胶颜色: 01, 白色 02, 黑色 03, 本色
 - 塑胶材质: 1, PBT 2, LCP 3, PA9T 4, PPA 5, PA6T
 - 对插方向: A, 正向 B, 反向
 - 外壳材质: 1, 铁壳 2, 铜壳
 - 插口类型: 1, 有边平弹 2, 无边平弹
 - 外壳脚型: 1, 弯脚 2, 直脚 3, 无脚 4, 鱼叉脚
 - 类别: 双层系列

Pin NUMBER		SIGNAL NAME	
1		VBUS	
2		D-	
3		D+	
4		GND	

公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.30	X.	±5.°
.X	±0.25	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

产品图 PRODUCT CHART DWG									
公差一览表 TOLERANCE UNLESS OTHERWISE									
单位 UNITS	MM	制图 DRAWING	YANG	制图料号 PRODUCT PART NO.	907-412A1021Y10210				
比例 SCALE	1:1	审核 CHKD	郭志富	产品名称 PRODUCT NO.	AF大电流180度10.5双层鱼叉脚有边平弹铜壳PBT黑胶				
日期 DATE	2019.11.23	核准 APPD	黄国荣	角法 VIEW		版本 VER	AO		