




Connectors > Terminal Blocks & Strips > PCB Terminal Blocks

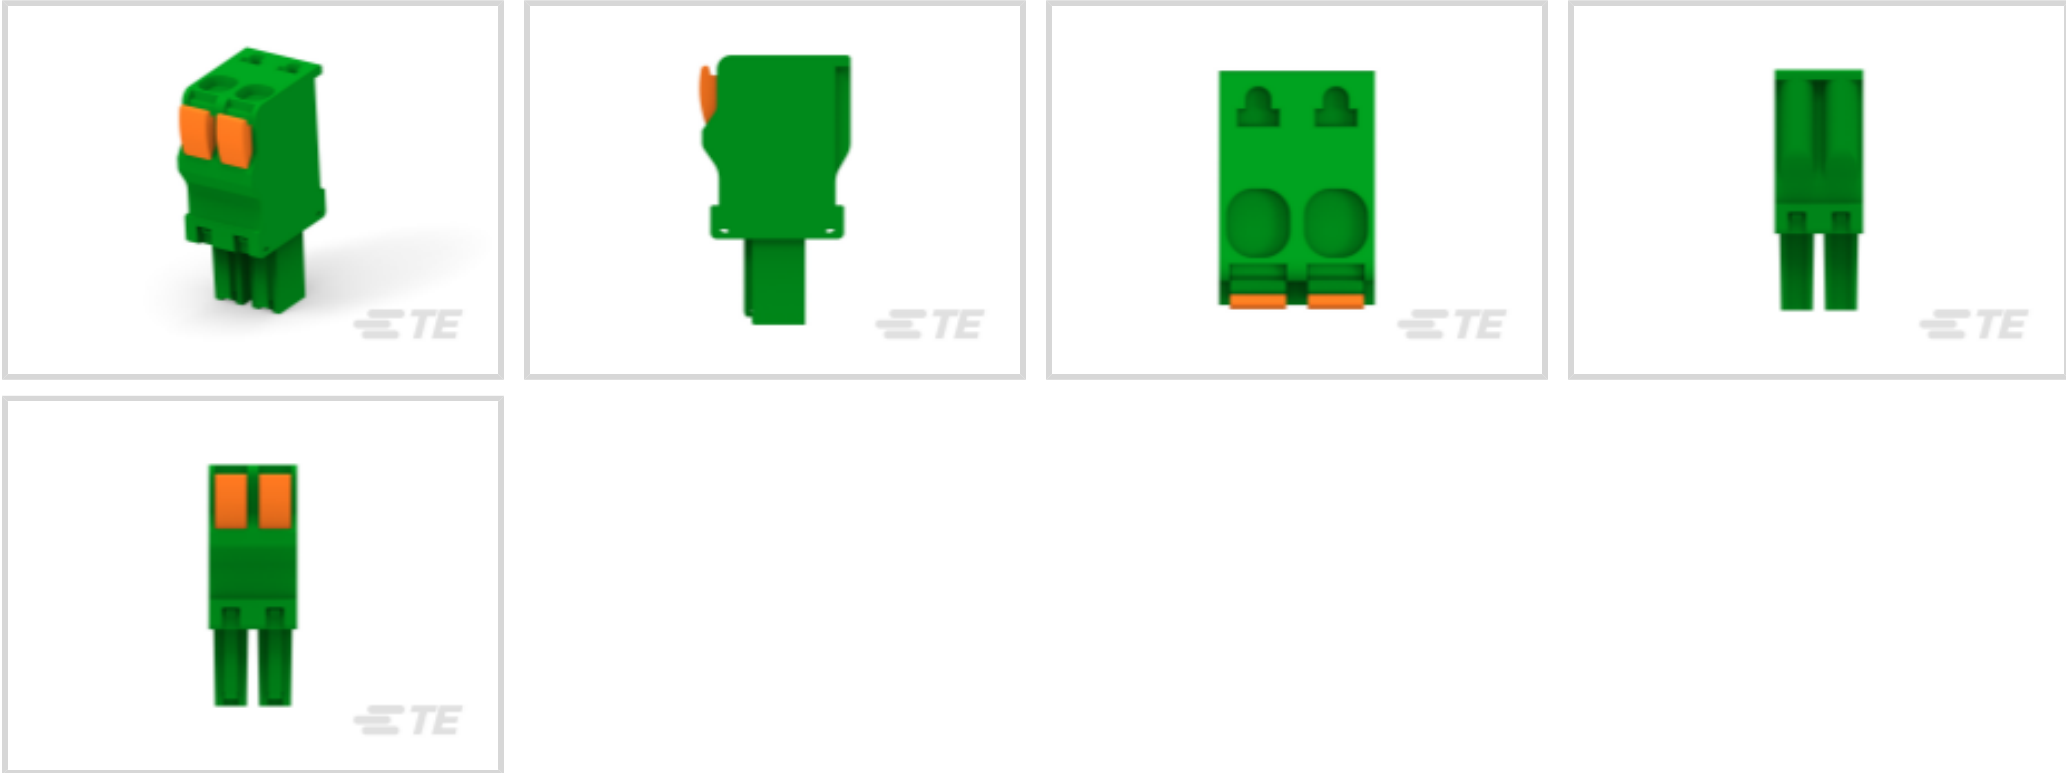

Terminal Block Connector Type: **Plug**  
Connector System: **Wire-to-Board**  
Number of Positions: **2**  
Centerline (Pitch): **3.81 mm [.15 in]**  
Number of Rows: **1**

Features

Product Type Features

|                                   |               |
|-----------------------------------|---------------|
| Wire Protection                   | With          |
| Terminal Block Connector Type     | Plug          |
| Connector System                  | Wire-to-Board |
| Connector & Contact Terminates To | Wire & Cable  |

Configuration Features

|                        |                |
|------------------------|----------------|
| Wire Entry Location    | Top            |
| Stacking Configuration | Side Stackable |
| Number of Positions    | 2              |
| Number of Rows         | 1              |
| Wire Entry Angle       | 180°           |

Electrical Characteristics

|                   |         |
|-------------------|---------|
| Operating Voltage | 300 VAC |
|-------------------|---------|

Body Features

|             |        |
|-------------|--------|
| Lever Color | Orange |
|-------------|--------|



|                       |          |
|-----------------------|----------|
| Primary Product Color | Green    |
| Product Orientation   | Vertical |

Contact Features

|                                      |                 |
|--------------------------------------|-----------------|
| Contact Mating Area Plating Material | Tin             |
| Contact Base Material                | Phosphor Bronze |
| Contact Current Rating (Max)         | 11 A            |

Termination Features

|                                    |                          |
|------------------------------------|--------------------------|
| Termination Method to Wire & Cable | Push-in, Spring Terminal |
|------------------------------------|--------------------------|

Housing Features

|                    |                 |
|--------------------|-----------------|
| Housing Material   | PA 66           |
| Centerline (Pitch) | 3.81 mm[.15 in] |

Dimensions

|           |             |
|-----------|-------------|
| Wire Size | .05 – 2 mm² |
|-----------|-------------|

Usage Conditions

|                             |                           |
|-----------------------------|---------------------------|
| Operating Temperature Range | -40 – 65 °C[-40 – 149 °F] |
|-----------------------------|---------------------------|

Operation/Application

|                     |                |
|---------------------|----------------|
| Circuit Application | Power & Signal |
|---------------------|----------------|

Packaging Features

|                    |     |
|--------------------|-----|
| Packaging Quantity | 300 |
|--------------------|-----|

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant with Exemptions                                                                                                                                                                                                                                                                                                                                                                                                    |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                                                                                                                                                                                                                                                                                                                    |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold                                                                                                                                                                                                                                                                                                                                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2024 (241)<br>Candidate List Declared Against: JUNE 2024 (241)<br>SVHC > Threshold:<br>Pb (2% in Component Part)<br><b>Article Safe Usage Statements:</b><br>Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location. |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC                                                                                                                                                                                                                                                                                                                                               |



Free

Solder Process Capability

Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 1986692-2  
STR PLUG SPRING TYPE RH 2P, 3.50 mm



TE Part # 2342077-2  
2POS HDR 90 DEG,HT,3.81MM PITCH, TL 1.9MM



TE Part # 2342078-2  
2POS HDR ST, HT, 3.81MM PITCH, TL 1.9MM



TE Part # 284517-2  
2P TERMIBLOK HDR DIR POLAR

Customers Also Bought



TE Part #2-6609115-3  
6EGG1-2=F7386D



TE Part #211102-1  
CPC RECEPT ASSEMBLY SIZE 11-4



TE Part #34541  
PIDG SPD 22-16 COMM 22-18MIL 6



TE Part #3-640707-1  
SL 156 RECEPTACLE LP



TE Part #440129-2  
2.0MM,HSG,2POS



TE Part #1367147-1  
SFP COVER, UNPLATED



TE Part #1-1879208-1  
CPF 0402 27R 0.1% 25PPM 1K RL



TE Part #ANT-W63-SPNF1  
Antenna WiFi6/6E Dome N Jack





Documents

Product Drawings

STR PLUG SPRING TYPE RH 2P, 3.81mm

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1986720-2\_A\_c-1986720-2-a.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1986720-2\_A\_c-1986720-2-a.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1986720-2\_A\_c-1986720-2-a.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

2-1773464-1\_Spring\_Type\_Straight\_Plugs

English

Agency Approvals

UL

English