

PLS-045B-3VAI



PLS-045B-3VAI

Stainless Steel Level Sensor


Electrical Characteristics		@ 25 °C
Contact form		B
Contact rating max.	W / VA	10
Switching voltage max.	VDC	200
	VAC	140
Switching current max.	A	1
Carry current max.	A	1.2
Breakdown voltage min.	VDC	240
Total resistance max.	mΩ	180

Environmental Characteristics		
Operating temperature	°C	-40 to +125
Storage temperature	°C	-40 to +125

Mechanical Characteristics		
Density of float typ.*	g / cm ³	0.7
Recommended minimum gravity of medium	g / cm ³	Density of float + 20%

* in delivery condition

Dimensions in mm

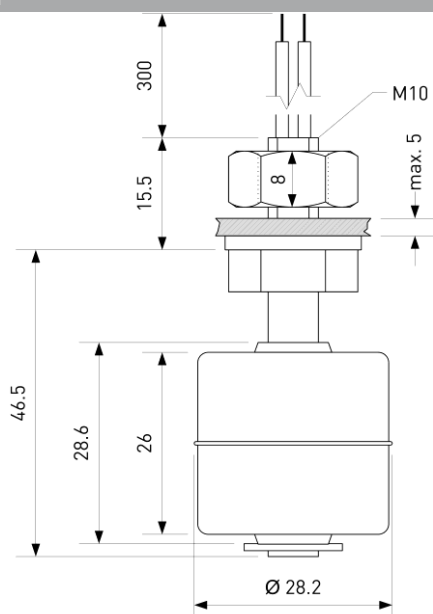

Features
➤ Stainless Steel housing
➤ Rugged and durable
➤ Suitable for food contact
➤ Extended temperature range
➤ Customized types available

Approvals
RoHS
REACH
IP 67
CE US

Ordering Information		
Packing Unit	5	pcs
Weight per piece	46	g
Weight per package	232	g

PLS-045B-3VAI

PLS-045B-3VAI


Stainless Steel Level Sensor



Material Information

	Material	Colour
Housing	Stainless Steel 304, mechanically polished	
Cable	UL 1332, AWG 24, 4 mm stripped and tinned	black
Nuts	Stainless Steel 304, M10, 1 pc preassembled	
Float	Stainless Steel 304, mechanically polished	
Potting	PU / Epoxy	black
Sealing ring	Silicone	white

Operation View




Remarks

When mounted near ferromagnetic parts switching distance of PLS-045B-3VAI may vary.

Electromagnetical influences and magnetic fields may change the switching behaviour of the Level Sensor.

Mounting

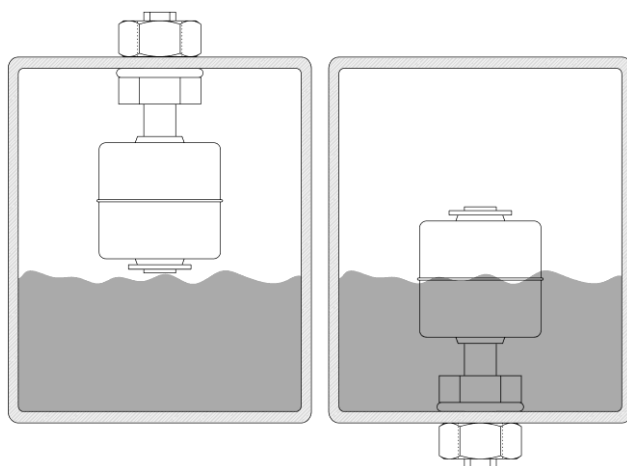

When mounted stem up, operating functions are reversed.