
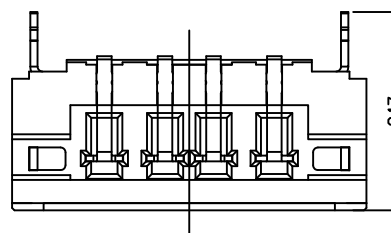
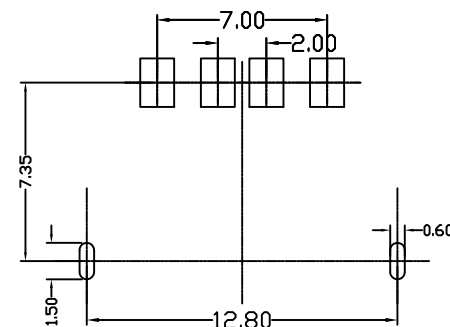
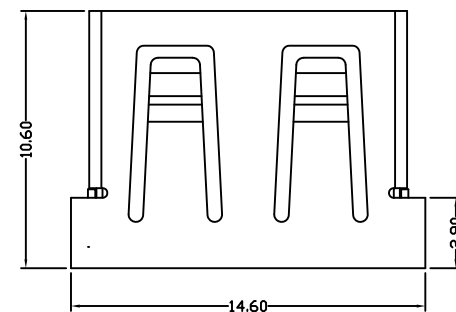

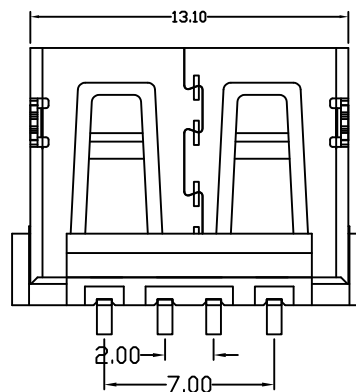
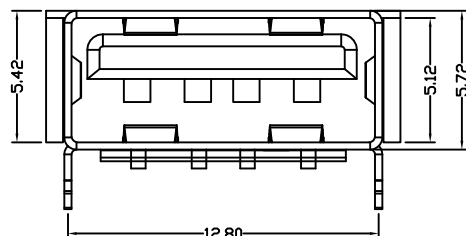


MAPX	MODIFICATION	DATE

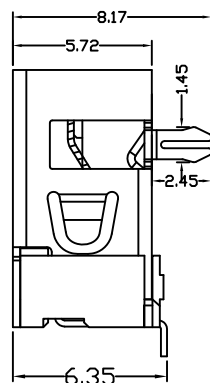

Specification:

1. Electrical Characteristics:

Dielectric Withstanding Voltage: AC 500V/1MINUTE.

Insulation Resistance: 1000 MΩ\Min.

Contact Resistance: 30 mΩ\ Max.

2.Mechanical Characteristics:

INSERTION FORCE: 30N(3.06Kgf) MAX

EXTRACTION FORCE: 10~30N(1.02~3.06Kgf)

Durability:1500cycles.EXTRACTION FORCE:10~30N(1.02~3.06Kgf)

3. Material:

Terminal: Phosphor Bronze, C5191/C2680R-EH T=0.25

Plating: Gold 0.76 um Min plating over 1.27 um Min Nickel underplate, 2.54 um Min Sn selective plating on solder tail;