


CE04 Type

Features

- 85°C, 2,000 ~ 3,000 hours assured
- Standard series for general purpose
- RoHS Compliance

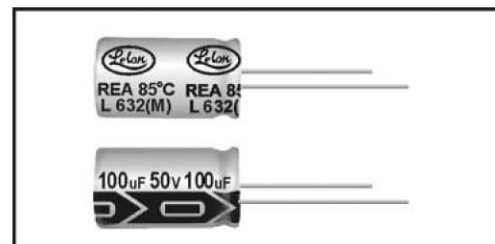

SPECIFICATIONS


Items	Performance																																												
Operating Temperature Range	-40℃ ~ +85℃																																												
Capacitance Tolerance	±20% (at 120Hz, 20℃)																																												
Leakage Current (at 20℃)	Rated voltage		≤ 100V					> 100V																																					
	Time		after 2 minutes					after 5 minutes																																					
	Leakage Current		I = 0.01CV or 3 (μ A) whichever is greater					CV ≤ 1000 I = 0.03CV+15(μ A)				CV > 1000 I = 0.02CV+25(μ A)																																	
			Where, C= rated capacitance in μ F. V = rated DC working voltage in V.																																										
Dissipation Factor (Tan δ at 120 Hz, 20℃)	<table><tr><td>Rated Voltage</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td><td>160</td><td>200</td><td>250</td><td>350</td><td>400</td><td>450</td></tr><tr><td>Tan δ (max)</td><td>0.23</td><td>0.20</td><td>0.16</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.09</td><td>0.08</td><td>0.12</td><td>0.14</td><td>0.17</td><td>0.20</td><td>0.25</td><td>0.25</td></tr></table>															Rated Voltage	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	Tan δ (max)	0.23	0.20	0.16	0.14	0.12	0.10	0.09	0.08	0.12	0.14	0.17	0.20	0.25	0.25
	Rated Voltage	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450																														
Tan δ (max)	0.23	0.20	0.16	0.14	0.12	0.10	0.09	0.08	0.12	0.14	0.17	0.20	0.25	0.25																															
When the capacitance exceeds 1,000 μ F, 0.02 shall be added every 1000 μ F increase.																																													
Low Temperature Characteristics (at 120Hz)	Impedance ratio shall not exceed the values given in the table below.																																												
	Rated Voltage			6.3	10	16	25	35	50	63	100	160	200	250	350	400	450																												
	Impedance Ratio	Z(-25℃)	φ D < 16	6	4	3	3	2	2	2	2	3	6	8	12	14	16																												
		/Z(+20℃)	φ D ≥ 16	8	6	4	4	3	3	3	3																																		
		Z(-40℃)	φ D < 16	10	8	6	6	4	3	3	3	4	8	10	16	18	20																												
/Z(+20℃)		φ D ≥ 16	18	16	12	10	8	8	6	6																																			
Load Life Test	Test Time		2,000 hrs (3,000 hrs for φ D ≥ 10mm)																																										
	Capacitance Change		With in ±20% of initial value																																										
	Dissipation Factor		Less than 200% of specified value																																										
	Leakage Current		Within specified value																																										
* The above specifications shall be satisfied when the capacitors are restored to 20℃ after the rated voltage applied with rated ripple current for 2,000/3,000 hrs at 85℃.																																													
Shelf Life Test	Test Time		1,000 hrs																																										
	Capacitance Change		With in ±20% of initial value																																										
	Dissipation Factor		Less than 200% of specified value																																										
	Leakage Current		Within specified value																																										
* The above specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hrs at 85℃ without voltage applied. The rated voltage shall be applied to the capacitors before the measurements for 160 ~ 450V(Refer to JIS C 5102).																																													
Ripple Current & Frequency Multipliers	Freq. (Hz) Cap. (μ F)		60 (50)	120	500	1K	10K up																																						
			Under 100	0.70	1.00	1.30	1.40	1.50																																					
	100 < C ≤ 1000		0.75	1.00	1.20	1.30	1.35																																						
	1000 up above		0.80	1.00	1.10	1.12	1.15																																						
Other Standards	JIS C 5101-4																																												

North American Sales Office

Surge/Lelon ~ 95 East Jefrynn Blvd. ~ Deer Park, NY 11729 ~ Tel: (631) 595-1818 ~ Fax: (631) 595-1283

CE04 Type

DIAGRAM OF DIMENSIONS

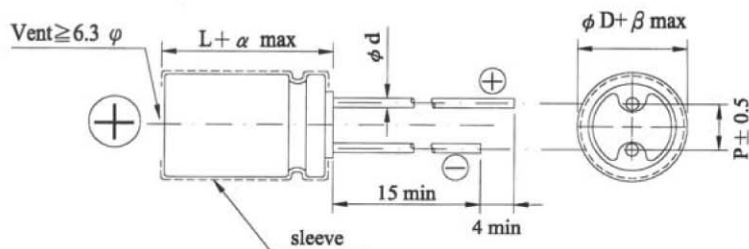

Unit: mm

LEAD SPACING AND DIAMETER

φD	5	6.3	8	10	12.5	16	18	22	25
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10	12.5
φd	0.5		0.6			0.8		1.0	
α	1.0			1.5				2.0	
β	0.5								

Dimension: φ D × L(mm)

Ripple Current: mA/rms at 120 Hz, 85°C

DIMENSION & PERMISSIBLE RIPPLE CURRENT

V. DC μ F Contents		6.3V (0J)				10V (1A)				16V (1C)				25V (1E)			
		φ D×L	mA	* φ D×L	mA	φ D×L	mA	* φ D×L	mA	φ D×L	mA	* φ D×L	mA	φ D×L	mA	* φ D×L	mA
4.7	4R7													5×11	31		
10	100									5×11	49			5×11	54		
22	220					5×11	70			5×11	75			5×11	80		
33	330	5×11	72			5×11	84			5×11	90			5×11	97		
47	470	5×11	90			5×11	100			5×11	110			5×11	115		
100	101	5×11	130			5×11	145			6.3×11	180	5×11	160	6.3×11	190		
220	221	6.3×11	230	5×11	200	6.3×11	250	5×11	220	8×11.5	300	6.3×11	260	8×11.5	320		
330	331	8×11.5	290	6.3×11	270	8×11.5	350	6.3×11	290	8×11.5	370	6.3×11	290	10×12.5	470	8×11.5	440
470	471	8×11.5	380	6.3×11	320	8×11.5	415	6.3×11	350	10×12.5	520	8×11.5	440	10×16	620	10×12.5	545
1,000	102	8×11.5	540			10×12.5	650	8×11.5	550	10×16	785	10×12.5	635	12.5×20	1,090	10×20	955
2,200	222	10×20	1,000	10×16	845	12.5×20	1,240	10×20	1,070	12.5×20	1,295			16×25	1,660	12.5×25	1,540
3,300	332	12.5×20	1,380	10×20	1,185	12.5×20	1,420			12.5×25	1,655	12.5×20	1,370	16×31.5	2,070	16×25	1,975
4,700	472	16×25	1,880	12.5×20	1,545	16×25	1,980	12.5×25	1,780	16×31.5	2,260	16×25	2,090	16×31.5	2,420	16×25	1,825
6,800	682	16×25	2,120	12.5×25	1,880	16×25	2,220			16×31.5	2,520	16×25	2,130	18×35.5	2,880	18×31.5	2,550
10,000	103	16×25	2,330	16×20	2,000	16×35.5	2,670	16×31.5	2,370	18×31.5	2,590	16×35.5	2,450	22×40	3,440	18×40	3,080
22,000	223	18×40	3,320	18×31.5	2,780	22×40	3,790	18×40	3,370	22×40	3,900						

V. DC μ F Contents		35V (1V)				50V (1H)				63V (1J)				100V (2A)			
		φ D×L	mA	* φ D×L	mA	φ D×L	mA	* φ D×L	mA	φ D×L	mA	* φ D×L	mA	φ D×L	mA	* φ D×L	mA
0.1	0R1					5×11	1.5			5×11	3			5×11	3		
0.22	R22					5×11	3.5			5×11	4.5			5×11	5.8		
0.33	R33					5×11	5			5×11	7.5			5×11	8.8		
0.47	R47					5×11	7			5×11	9.5			5×11	12		
1	010					5×11	15			5×11	17			5×11	22		
2.2	2R2					5×11	29			5×11	28			5×11	33		
3.3	3R3					5×11	35			5×11	34			5×11	40		
4.7	4R7	5×11	40			5×11	42			5×11	45			5×11	48		
10	100	5×11	58			5×11	65			5×11	70			6.3×11	80	5×11	59
22	220	5×11	87			5×11	95			6.3×11	115			8×11.5	135	6.3×11	115
33	330	6.3×11	115	5×11	108	6.3×11	136	5×11	125	8×11.5	150	6.3×11	140	10×16	195	8×11.5	145
47	470	6.3×11	145	5×11	130	6.3×11	165			8×11.5	190	6.3×11	170	10×16	255	10×12.5	235
100	101	8×11.5	240	6.3×11	210	8×11.5	260			10×12.5	320	8×11.5	245	10×20	370	10×16	325
220	221	10×12.5	420	8×11.5	385	10×16	490	10×12.5	455	10×20	565	10×16	490	12.5×25	675	12.5×20	640
330	331	10×16	570	10×12.5	490	12.5×20	635	10×16	585	12.5×20	765	10×20	710	16×25	825	16×20	695
470	471	10×16	740			12.5×20	860	10×20	755	16×25	1,050	12.5×20	900	16×31.5	1,070	16×25	910
1,000	102	12.5×20	1,145			16×25	1,530	12.5×25	1,340	16×25	1,560	16×20	1,260	22×40	2,600	18×40	2,410
2,200	222	16×31.5	1,890	16×25	1,785	18×40	2,231	16×35.5	2,075	18×40	2,385	18×31.5	1,955				
3,300	332	16×35.5	2,275	16×31.5	2,070	22×40	2,785	18×35.5	2,500	22×40	3,000	18×40	2,660				
4,700	472	18×35.5	2,700	18×31.5	2,360	25×40	3,300	22×40	3,155	25×40	3,560	22×40	2,890				

Case size in mark of “*” is smaller.

North American Sales Office

Surge/Lelon ~ 95 East Jefrynn Blvd. ~ Deer Park, NY 11729 ~ Tel: (631) 595-1818 ~ Fax: (631) 595-1283

CE04 Type

Dimension: $\phi D \times L(\text{mm})$

Ripple Current: mA/rms at 120 Hz, 85°C

DIMENSION & PERMISSIBLE RIPPLE CURRENT

V. DC		160V (2C)				200V (2D)				250V (2E)			
μF	Contents	$\phi D \times L$	mA	* $\phi D \times L$	mA	$\phi D \times L$	mA	* $\phi D \times L$	mA	$\phi D \times L$	mA	* $\phi D \times L$	mA
0.47	R47	6.3×11	15	5×11	13	6.3×11	16	5×11	14	8×11.5	21	5×11	14
1	010	6.3×11	24	5×11	20	6.3×11	25	5×11	21	8×11.5	32	5×11	21
2.2	2R2	6.3×11	34	5×11	29	6.3×11	37	5×11	29	8×11.5	49	6.3×11	42
3.3	3R3	8×11.5	50	6.3×11	43	8×11.5	54	6.3×11	46	8×11.5	60	6.3×11	46
4.7	4R7	8×11.5	60	6.3×11	51	8×11.5	64	6.3×11	50	10×16	93	8×11.5	72
10	100	10×12.5	104	8×11.5	75	10×12.5	112	8×11.5	81	10×16	138	10×12.5	112
22	220	10×20	189	10×16	150	10×20	204	10×16	155	12.5×20	255	10×20	220
33	330	12.5×20	270	10×20	228	12.5×20	288	10×20	210	12.5×25	348	12.5×20	310
47	470	12.5×25	354	12.5×20	318	12.5×25	378	12.5×20	300	16×25	468	12.5×25	420
100	101	16×25	582	12.5×25	510	16×35.5	678	16×25	582	16×35.5	732	16×31.5	645
220	221	18×35.5	900	16×31.5	792	18×35.5	1,002	18×31.5	885	22×40	1,134	18×40	985
330	331	18×40	1,010	18×35.5	984			18×40	1,200				


V. DC		350V (2V)				400V (2G)				450V (2W)			
μF	Contents	$\phi D \times L$	mA	* $\phi D \times L$	mA	$\phi D \times L$	mA	* $\phi D \times L$	mA	$\phi D \times L$	mA	* $\phi D \times L$	mA
0.47	R47	8×11.5	21	6.3×11	18	8×11.5	21	5×11	15	8×11.5	21	6.3×11	18
1	010	8×11.5	32	6.3×11	27	8×11.5	32	5×11	22	8×11.5	32	6.3×11	25
2.2	2R2	8×11.5	49	6.3×11	42	10×12.5	57	6.3×11	33	10×12.5	57	8×11.5	45
3.3	3R3	10×12.5	70	8×11.5	60	10×16	78	8×11.5	40	10×16	78	10×12.5	65
4.7	4R7	10×16	93	10×12.5	80	10×20	103	10×12.5	80	10×20	103	10×12.5	75
10	100	10×20	150	10×16	138	12.5×20	174	10×20	140	12.5×20	174	10×20	140
22	220	12.5×25	282	12.5×20	255	12.5×25	280	12.5×20	240	16×25	354	12.5×25	300
33	330	16×25	390	12.5×25	348	16×25	390	16×20	340	16×31.5	435	16×20	350
47	470	16×31.5	474	16×20	385	16×31.5	474	16×25	445	16×35.5	510	16×31.5	460
100	101	18×40	685	16×31.5	645	22×40	710	18×35.5	600	22×45	750	18×40	630

Case size in mark of “*” is smaller. 500WV specifications are available upon request.

※ Low-Profile Size

Unit: mm

DIAGRAM OF DIMENSIONS

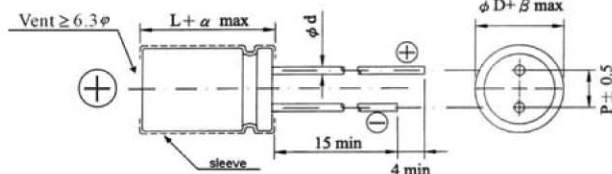

LEAD SPACING AND DIAMETER

φ D	12.5	16	18
P	5.0	7.5	7.5
φ d	0.6	0.8	
α	1.5		
β	0.5		

Dimension: $\phi D \times L(\text{mm})$

Ripple Current: mA/rms at 120 Hz, 85°C

DIMENSION & PERMISSIBLE RIPPLE CURRENT

V. DC		6.3V (0J)		10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)	
μF	Contents	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA
470	471											12.5×16	610
1,000	102											16×16	745
2,200	222			12.5×16	970	16×16	1,160	16×20	1,360	18×20	1,560		
3,300	332	12.5×16	960	16×16	1,310	12.5×16	930	16×16	1,150	16×20	1,390		
4,700	472	16×16	1,410	16×20	1,560	16×20	1,460	18×20	1,720	18×25	1,970		
6,800	682	16×20	1,660	16×16	1,420	16×16	1,240	16×20	1,490				
10,000	103	18×20	2,020	18×20	1,870	18×20	1,770	18×25	2,070				
				16×20	1,700	16×20	1,600						
				18×25	2,370	18×25	2,170						
				16×20	2,050	18×20	1,850						

V. DC		160V (2C)		200V (2D)		250V (2E)		400V (2G)	
μF	Contents	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA
10	101					12.5×16	150		
22	220					12.5×16	280	16×16	280
33	330	12.5×16	305	12.5×16	280	16×16	350	16×20	355
47	470	12.5×16	360	16×16	390	16×20	420	18×20	435
68	680	16×16	440	16×20	420	16×16	470		
100	101	16×20	560	16×20	490	18×20	490		
		18×20	590	18×25	590				
150	151	18×20	640						
		18×25	710						

North American Sales Office

Surge/Lelon ~ 95 East Jefryn Blvd. ~ Deer Park, NY 11729 ~ Tel: (631) 595-1818 ~ Fax: (631) 595-1283