
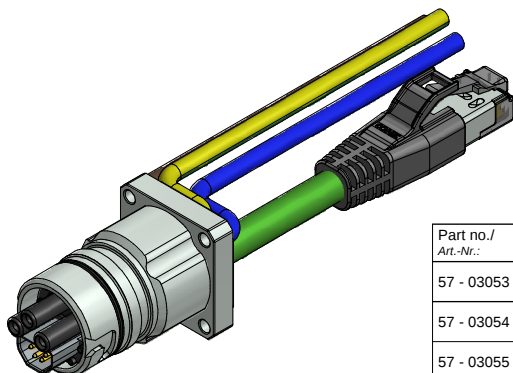




1	yellow / gelb	AWG22	TX +	1
2	white / weiß	AWG22	RX +	3
3	blue / blau	AWG22	RX -	6
4	orange / orange	AWG22	TX -	2
shielding / Schirmung				
5	brown / braun	2,5 mm ²		
6	gn-ye / gn-ge	2,5 mm ²		
7	blue / blau	2,5 mm ²		

Part no./ Art.-Nr.:	Description/ Bezeichnung:	Length L1/ Länge L1:	Length L2/ Länge L2:	Cable/ Kabel:	Type/ Typ:
57 - 03053	ENP - 17 - 1 - FSV1Pbu2PEADst4 - 45S - RS8.33 - 0,5 / 0,5 / G6 / 250 / 034	0,5m	0,5m	Cable / Kabel: PUR, (4xAWG22) 781-G63400	Contacts Site A/ Kontakte Seite A: Female/ Buchse (Power) Male/ Stift (Data)
57 - 03054	ENP - 17 - 1 - FSV1Pbu2PEADst4 - 45S - RS8.33 - 1 / 1 / G6 / 250 / 034	1m	1m		
57 - 03055	ENP - 17 - 1 - FSV1Pbu2PEADst4 - 45S - RS8.33 - 2 / 2 / G6 / 250 / 034	2m	2m	Wires / Litzen: PVC, (3x2,5mm²)	Site B/ Seite B: RJ45 Male/ RJ45 Stecker
57 - xxxxx	ENP - 17 - 1 - FSV1Pbu2PEADst4 - 45S - RS8.33 - ... / ... / G6 / 250 / 034	x	x		

tolerance of cable / wire/ Kabel- / Litzentoleranz:		L ≤ 5m: L ± 50mm L > 5m: L ± 2%		 dim. in mm		Receptacle B17, with square, Coding 1 Flansch B17, Vierkant, Codierung 1			
general tolerance/ Allgemeintoleranz:	0	± 0,50mm		Date/Datum	Name				
	0,0	± 0,25mm		30.11.2016	Becker				
	0,00	± 0,10mm		30.11.2016	Schramm				
±	± 1,5°								
Index: a Original	Scale/Maßstab: 1:1 (1,5:1)		dwg no / Z.-nr.:			57K1A1351			DIN- A3
Status: InBearbeitung									
RoHS & REACH compliant/konform									1 / 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[57-03054](#) [57-03055](#) [57-03053](#)