




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B		03/02/2007	Ivan	Revise Color Designation For Pin Out
C	LEN-8B0055~58	2008/09/25	Shin	Add Note
D	LEN1630602~05	2016/03/18	Ruru	Change Logo & Note

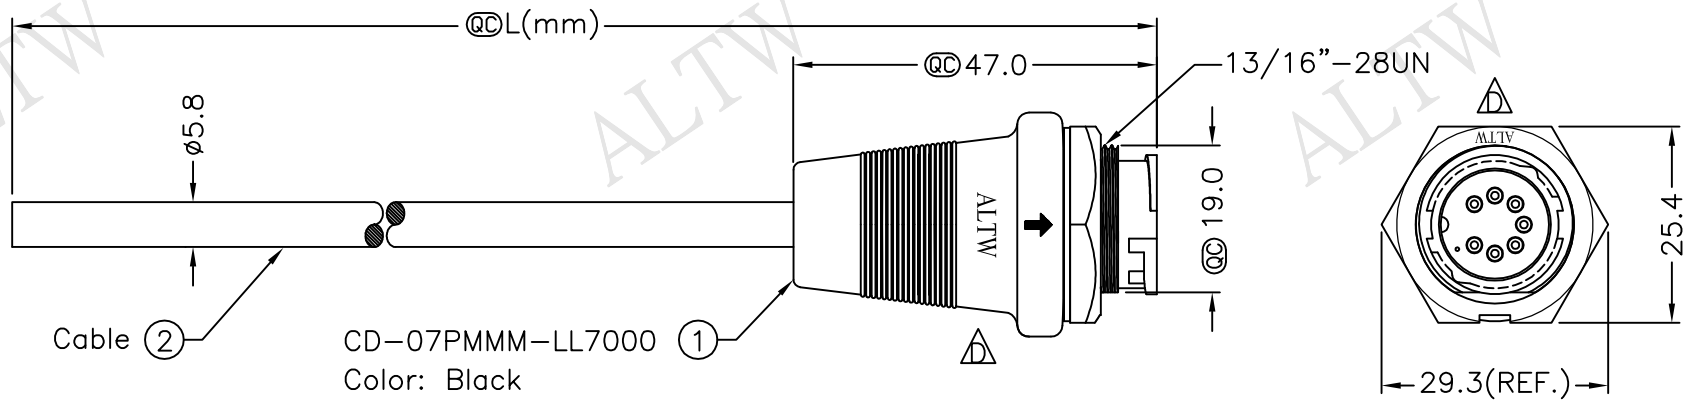


Recommended
Panel Cut-Out



Pin Assignments
Front View

7	White	白	△
6	Green	綠	△
5	Brown	棕	△
4	Red	紅	△
3	Yellow	黃	△
2	Orange	橘	△
1	Blue	藍	△
Conn.	Wire Color		
	Pin Out		



CD-07PMMM-LL7AXX
XX:01~99Meter
01:01Meter
02:02Meters
...
99:99Meters
Cable Length(L):01~99Meters

- Note:
- * @@Important Dimensions To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF,Black
 - * Male Pin: Copper Alloy,Gold Plated
 - * Cable: UL2464 24AWG*7C+D+AL/My Black,PVC Jacket UV Resistant, OD=5.8
 - * Maximum Panel Thickness: 2.0mm
 - * Use with waterproof cap or dust cap
Panel Thickness Max: 2.0mm
 - * Use without waterproof cap or dust cap
Panel Thickness Max: 3.0mm
 - * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT:mm		TITLE Middle, Cable Lock 7Pin M Conn M Pin
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1
REV. D	SIZE A4	QC :Inspection Item

ITEM NO	DRAWN BY Ruru	DATE 2016/03/18
DWG NO CD-07PMMM-LL7AXX	CHECKED BY Rita	DATE 2016/03/18
CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016/03/18

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[CD-07PMMM-LL7A01](#) [CD-07PMMM-LL7A02](#) [CD-07PMMM-LL7A05](#) [CD-07PMMM-LL7A10](#)