



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		尺寸修正，图面升级整理图面	2024.07.03	阿 树

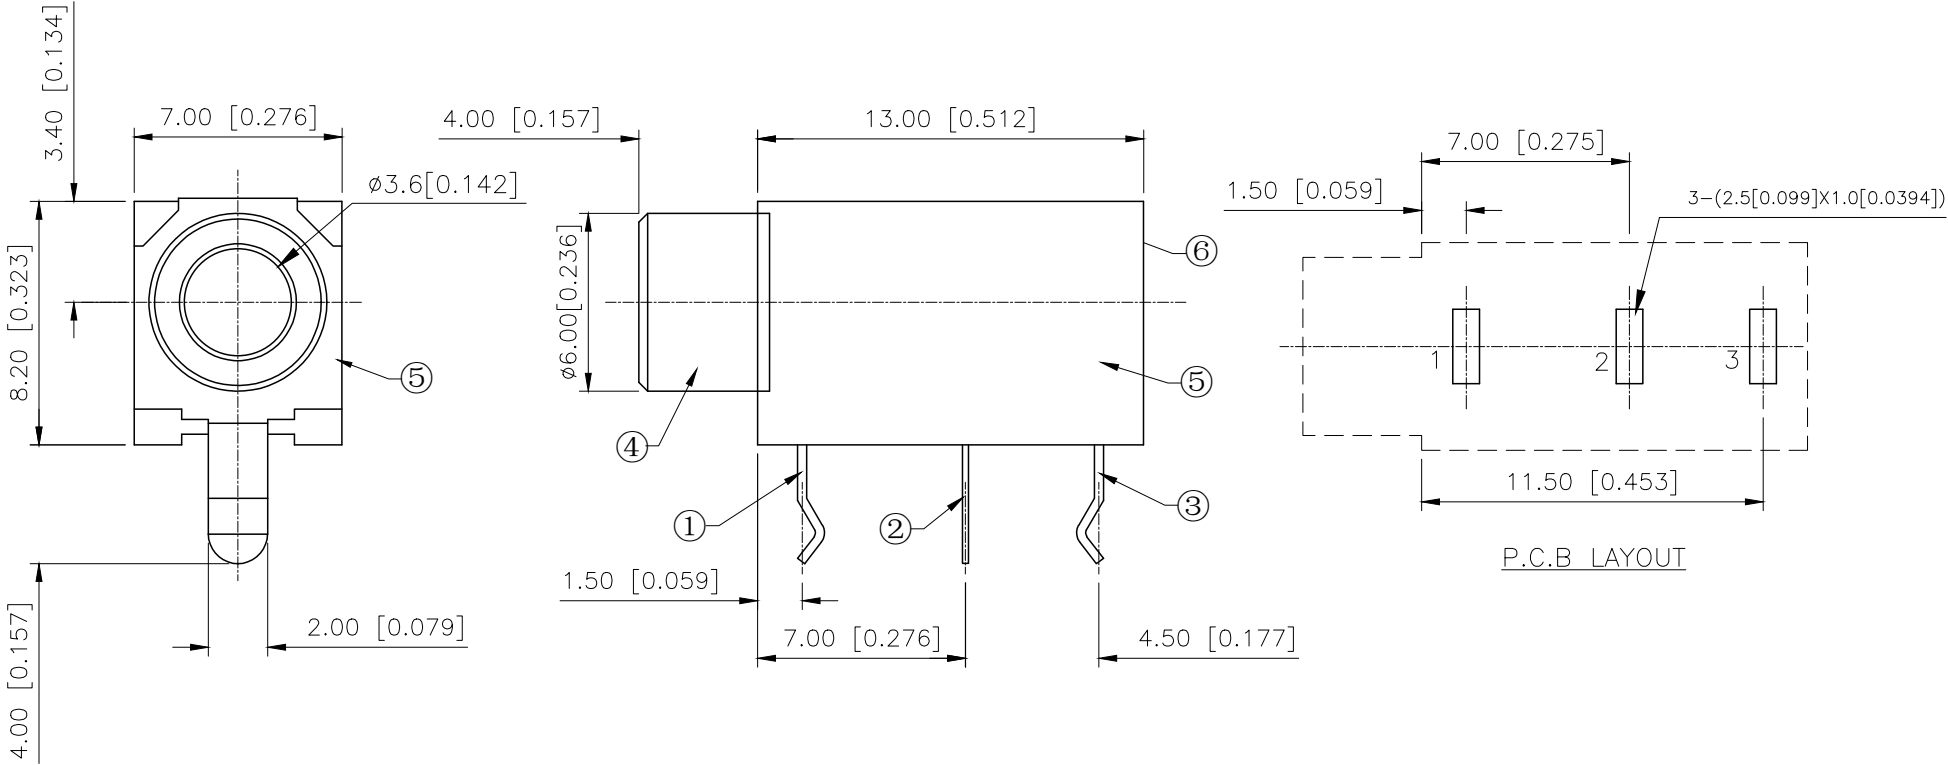

Specifications(规格):

- 1.Voltage rating(额定电压):30V AC DC
- 2.Current rating(额定电流):0.5A AC/DC
- 3.Withstanding voltage(耐压值):AC500V(50Hz) /min
- 4.Insulation resistance(绝缘电阻): $\geq 100\text{M}\Omega$ Min
- 5.Contact resistance(接触电阻): $30\text{m}\Omega$ Max
- 6.Mating cycles (寿命) : 5000 cycles Min
- 7.Insertion and extraction force (插拔力) : 3-20W
- 8.Temperature range(使用温度): $-45^{\circ}\text{C}\sim-105^{\circ}\text{C}$



SCHEMATIC

6	Back cover	1	PBT	Black	
5	Pedestal	1	PBT	Black	
4	Copper sleeve	1	Brass	$\phi 6.0$	Copper-plated bottom And Tin Plated
3	3# Terminal	1	Brass	T=0.35	Ag
2	2# Terminal	1	Phosphor copper	T=0.25	Ag
1	1# Terminal	1	Brass	T=0.35	Ag
NO	PRODUCT NAME	QTY	MATERIAL	SPECIFICATIONS	PLATING

ANGULAR	$\pm 5^{\circ}$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	

XKB

DESIGN	阿 树	VIEW:		MODEL TYPE:	3.5 PHONE JACK
CHECKED		UNIT:	mm/in	PART NO.:	PJ-316
APPROVED		SIZE:	A4	DWG NO.:	

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1