
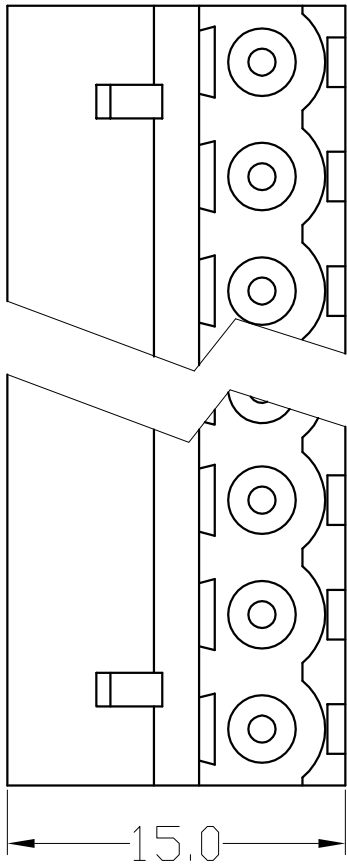
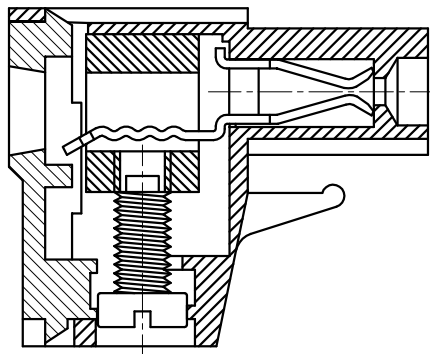


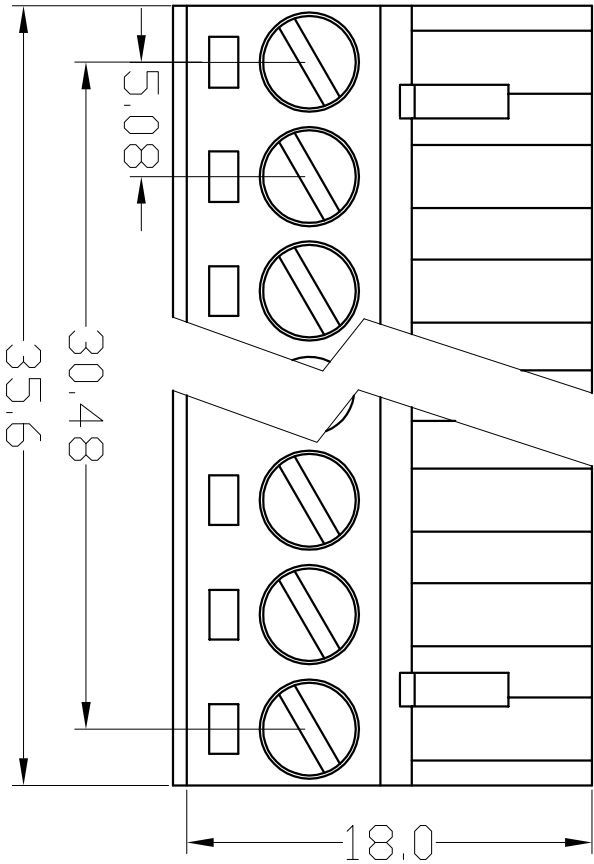

300V 15A 2.5mm²
Poles: 7P
Pitch: 5.08mm(.200")

Materials
Housing: PA66 (UL 94V-0)
Contact Phosphor Bronze, Nickel Plated.
Wire Cage: Brass(Nickel Plated)or Steel(zinc plated)
Screw: M2.5, Steel, A3 Zinc Plated.
Torque: 0.4N.m

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------

设计/Designed by		绘图/Drawing by		审核/Checked by		批准/Approved by		未注公差 General Tolerance	
 新莱亚电子 XINLAIYA ELECTRONIC CO., LTD		图名/Title		文件编号/File No.		XY2500FB-7P		X.°	X.°
								.X	.X°
								.XX	.XX°
备注/Remark		页序/Sheet		单件/Units: mm				.xxx	.xxx