

1614000

https://www.phoenixcontact.com/us/products/1614000

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Coupler connector, straight, Screw locking mechanism, M23, number of positions: 17, contact connection type: Socket, shielded: yes, degree of protection: IP67, cable diameter range: 6 mm . .. 10 mm, number of positions: 17, connection method: Crimp connection, series: RF, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1242837

### Commercial data

Item number	1614000
Packing unit	20 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Product key	ABRAGW
GTIN	4046356443876
Weight per piece (including packing)	109.18 g
Weight per piece (excluding packing)	109.18 g
Country of origin	DE



1614000

https://www.phoenixcontact.com/us/products/1614000

### Technical data

#### Notes

Order information:	Order crimp contacts Ø 1 mm separately	

### Product properties

Product type	Circular connector (cable-side)
Series	RF
Application	Feedback, signal
Number of positions	17
Connection profile	17
Shielded	yes
Coding	N
Thread type	M23

### Material specifications

Seal material	FPM
Housing material	Metal
Housing material	High-grade steel 1.4305

### Connection data

Conductor connection

Crimp connection
(

### Electrical properties

### Contact

Contact diameter	1 mm
Max. current	8 A
Nominal voltage U <sub>N</sub>	48 V AC 74 V DC
Overvoltage category	III
Degree of pollution	3
Rated surge voltage	1.5 kV

### Connector

Туре	straight
Direction of rotation	Standard
Connection 1	
Head design	Socket

### Cable/line

External cable diameter	6 mm 10 mm

#### Environmental and real-life conditions



1614000

https://www.phoenixcontact.com/us/products/1614000

#### Ambient conditions

Degree of protection	IP67	
Ambient temperature (operation)	-20 °C 125 °C	
Altitude	2000 m	




https://www.phoenixcontact.com/us/products/1614000



### Drawings

### Dimensional drawing

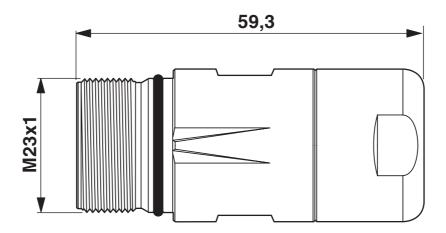

Dimensional drawing



1614000

https://www.phoenixcontact.com/us/products/1614000

### **Approvals**

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1614000

.71	<b>cUL Recognized</b> Approval ID: E153698-20090723			
	Nominal voltage $U_N$	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
	48 V	1 A	26 - 26	-

<b>7.1</b>	UL Recognized Approval ID: E153698-20	0090723			
		Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
		48 V	1 A	26 - 26	-

ᆈᄟ	 Dago	anized



1614000

https://www.phoenixcontact.com/us/products/1614000

### Classifications

UNSPSC 21.0

### **ECLASS**

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116
ETIM	
ETIM 9.0	EC002635
UNSPSC	

39121400



1614000

https://www.phoenixcontact.com/us/products/1614000

### Environmental product compliance

#### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	8114c391-098b-4473-bce9-acb56466c273



1614000

https://www.phoenixcontact.com/us/products/1614000

### Accessories

PROT-M23PRO-OT-IP20 - Plastic protective cap

1055753

https://www.phoenixcontact.com/us/products/1055753



Plastic protective cap, M23, degree of protection: IP20, series: M23 PRO

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com