
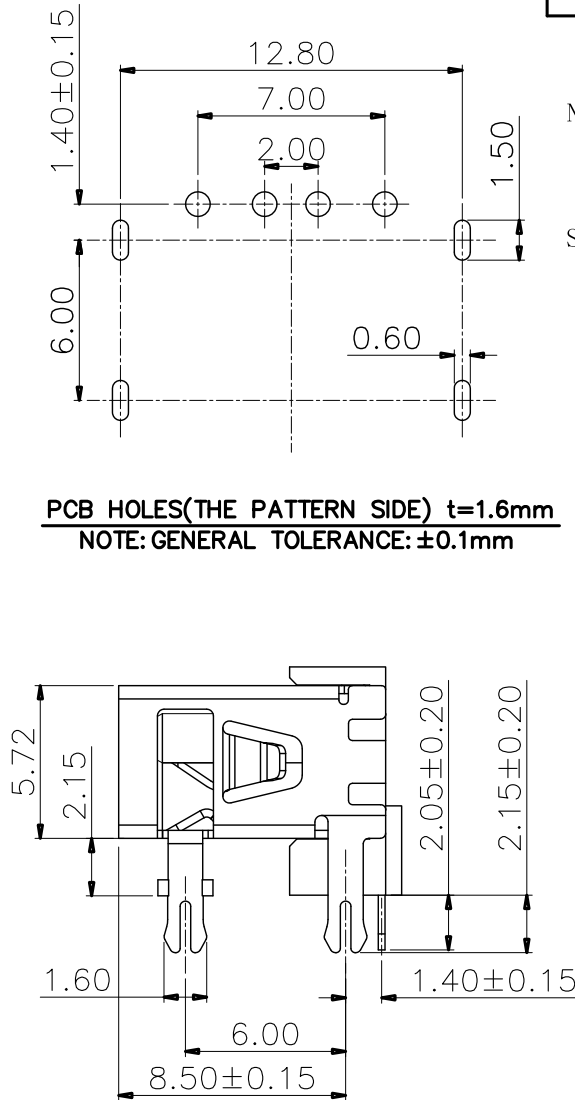
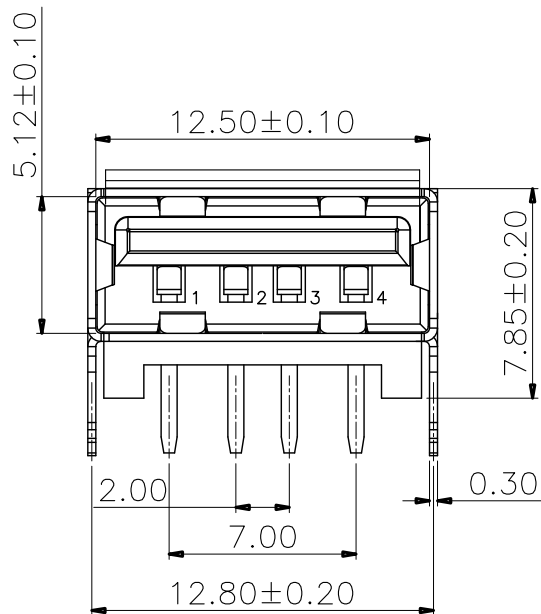


由Autodesk教育版产品制作

由Autodesk教育版产品制作

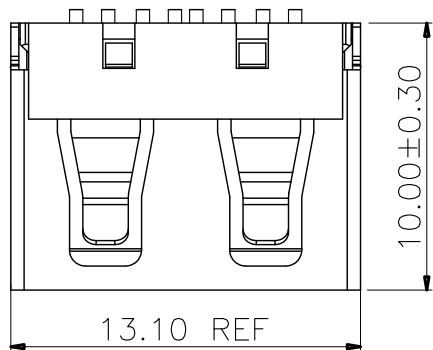

PCB HOLES(THE PATTERN SIDE) $t=1.6\text{mm}$
NOTE: GENERAL TOLERANCE: $\pm 0.1\text{mm}$

MAPX	MODIFICATION	DATE

NOTES:

1. HOUSING: SEE NOTES,
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

SPECIFICATION:

1. ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: $30\text{M}\Omega$ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: $1000\text{M}\Omega$ MIN
2. MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N (3.57KGF) MAX
EXTRACTION FORCE: $10\sim 35\text{N}$ ($1.02\sim 3.57\text{KGF}$) MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE: $10\sim 35\text{N}$
 5000 CYCLES MIN
 5000 CYCLES EXTRACTION FORCE: $3\sim 35\text{N}$
3. ENVIRONMENTAL:
OPERATING TEMPERATURE: $-55^{\circ}\text{C}+85^{\circ}\text{C}$
4. Contact finish:
01: Selective Gold Flash
02: Selective Gold $3\text{U}''$
03: Selective Gold $5\text{U}''$
04: Selective Gold $15\text{U}''$
05: Selective Gold $30\text{U}''$

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X	± 0.25	X	$\pm 5^{\circ}$
.X	± 0.20	.X	$\pm 2^{\circ}$
.XX	± 0.15	.XX	$\pm 1^{\circ}$
.XXX	± 0.10	.XXX	$\pm 0.5^{\circ}$

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	909-361A1025D10100
比例 SCALE	1:1	审核 CHECK		产品名称 PRODUCT NO.	AF10.0B款四脚无边铁壳LCP黑胶 7.8DIP无耳朵
日期 DATE	2015.02.04	核准 APPD		角法 VIEW	版本 VER
					AO

由Autodesk教育版产品制作