


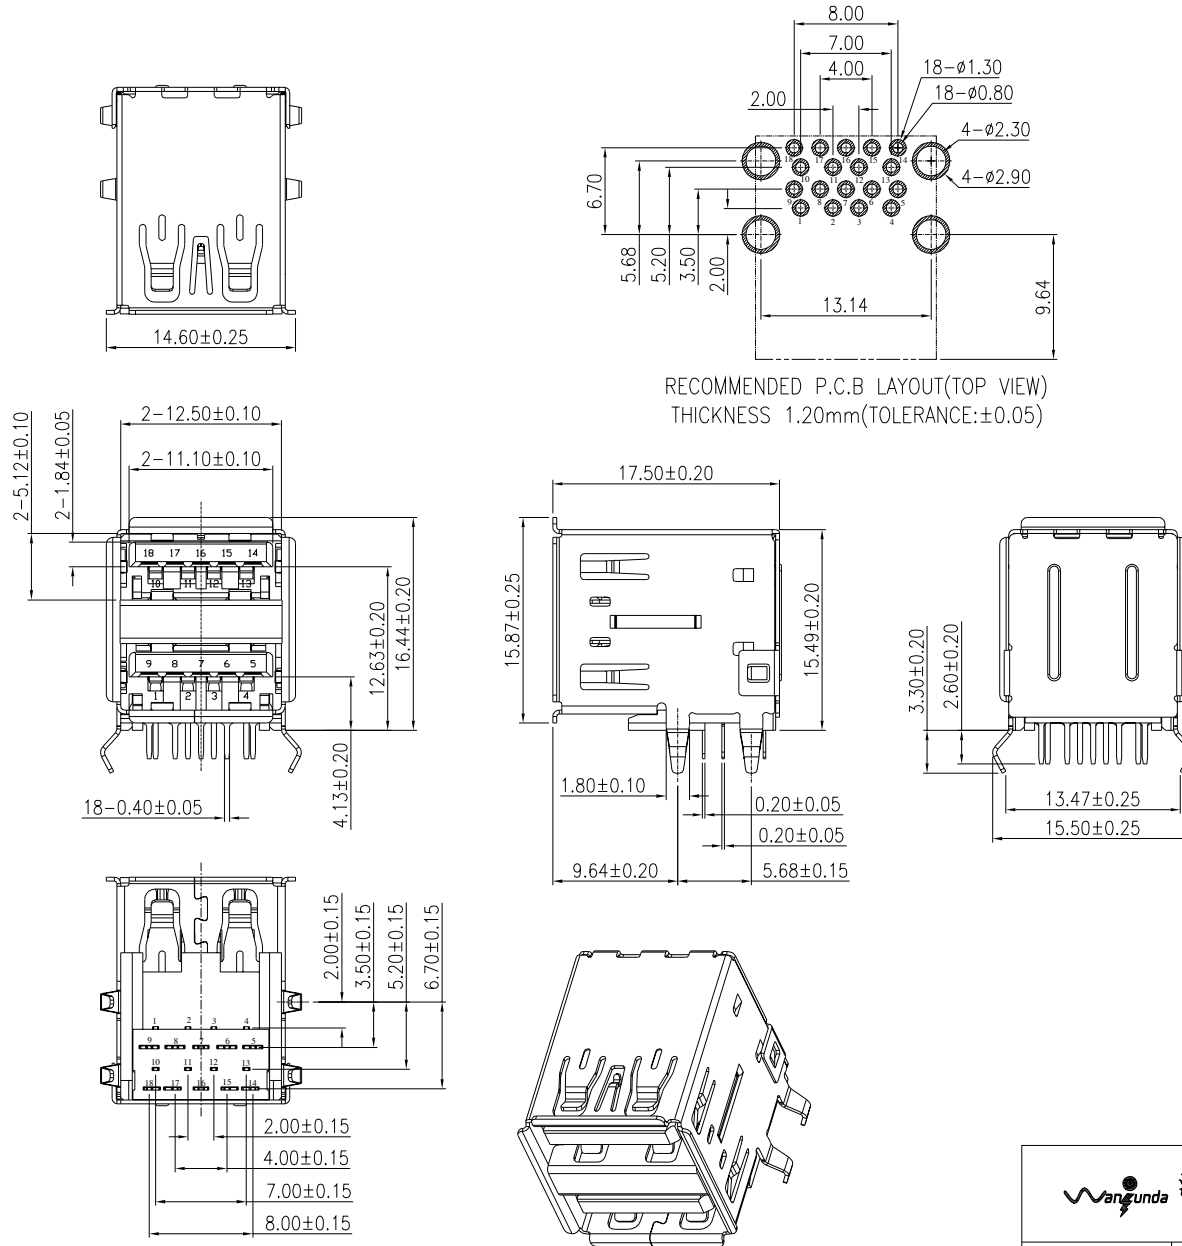

NOTE:

1. MATERIAL:

- 1.1 Housing: PBT Color: Blue
- 1.2 Cover: PBT Color: Blue
- 1.3 Contact: C2680 T=0.20
- 1.4 Shell: SPCC T=0.30
- 1.5 Middle Spring: SPCC T=0.25

2. PLATING:

- 2.1 Contact: Contact Area Au(G/F) Plated
Solder Area Sn(100u"Min) Plated
Under Plated Nickel(50u"Min)
- 2.2 Shell: Nickel(80u"Min) Plated

3. SPECIFICATION:

- 3.1 Current: 1.8A (Pin1,Pin4) Other Contacts 0.25A
- 3.2 Voltage: 30V RMS
- 3.3 Withstanding Voltage: 100V AC
- 3.4 Contact Resistance: 30 mΩ max. (Pin1,Pin4)
50 mΩ max. Other Contacts
- 3.5 Insulation Resistance: 100 MΩ min.
- 3.6 Temperature Range: -25°C to +85°C
- 3.7 Mating And Unmating Force:
 - 3.7.1 Mating Force: 3.5Kgf(35N)Max.
 - 3.7.2 Unmating Force: 1.02Kgf~3.5Kgf(10N~35N)
- 3.8 Durability: 1500 Cycles

 深圳市万骏达电子有限公司 http://www.wanjunda.com	图号 (DWG NO)		单位 (UNIT): MM
	版本 (REV)		比例 (SCALE) 1:1
	日期 (DATE)		
	设计 (DESIGN)		未注公差 TOLERANCE UNSPECIFIED
	审核 (CHECKED)		X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 X" ±5" X.X" ±2"
品名 (ITEM NO)	USB 3.0 TYPE A 双层90度弯脚母座	日期 (DATE)	
料号 (PART NO)	2USB3.0-AF-WC-JB	设计 (DESIGN)	
模号 (MODEL NO)		审核 (CHECKED)	
		核准 (APPROVED)	