

Actuator

17-
401230Z

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/17-401230Z>

Your product:



17-401230Z Actuator

FRONT

Front form:	round
Reflector:	Plastic, Black
Front dimension:	Ø 18,3 mm

MOUNTING

Design:	raised
Mounting cut-out:	Ø 16.2 mm

OPERATING-/INDICATION PART

Lens:	round
Illumination colour:	Red

ELECTRICAL CHARACTERISTICS

Lumi. Intensity:	240 mcd
Operation current:	3 mA ±15 %
Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector
Operating voltage:	230 V AC ±10 %

MECHANICAL CHARATERISTIC

Terminal:	Plug-in terminal, 2.8 x 0.8 mm
Weight:	0.008 kg
Tightening torque:	Fixing nut max. 0.2 Nm

AMBIENT CONDITION

Storage temperature:	- 25 °C ... + 80 °C
IP Protection:	IP40 front side, IP65 front side, according to IEC 60529
Operating temperature:	- 20 °C ... + 60 °C

CERTIFICATE

Conformities:	2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)
Approbations:	UL


OTHER

Hints:	Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.
---------------	--

Short Description:	Actuator, Ø 16.2 mm, Ø 18,3 mm, round, Plug-in terminal, 2.8 x 0.8 mm, Red
---------------------------	--


Kind of illumination:	Single-LED
------------------------------	------------

Dimension drawings:

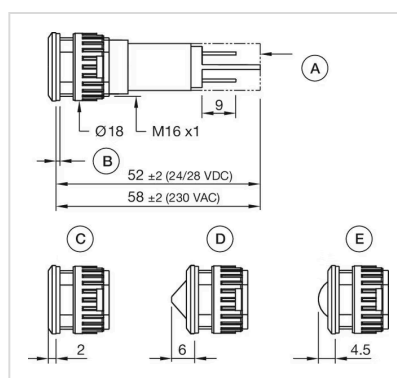

A = Protection tube (only 230 VAC)
 B = 1 gasket
 C = flat
 conical
 D = round

Mounting cut-outs:

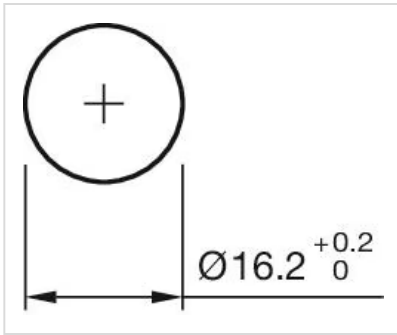

Wiring diagrams:

