






LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		0	RELEASED PER EC 0S13-0556-04	28JUL05	JG	SS

D



C

B

A

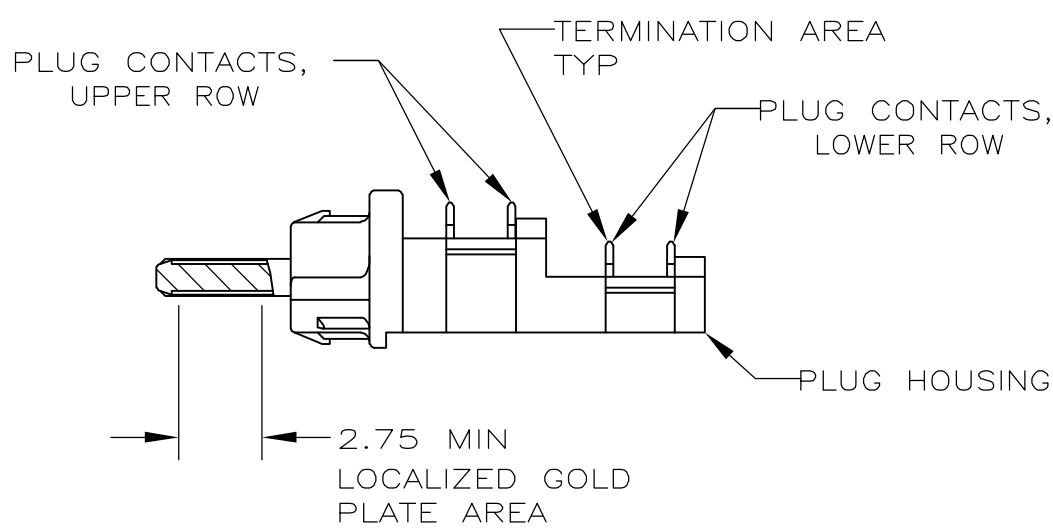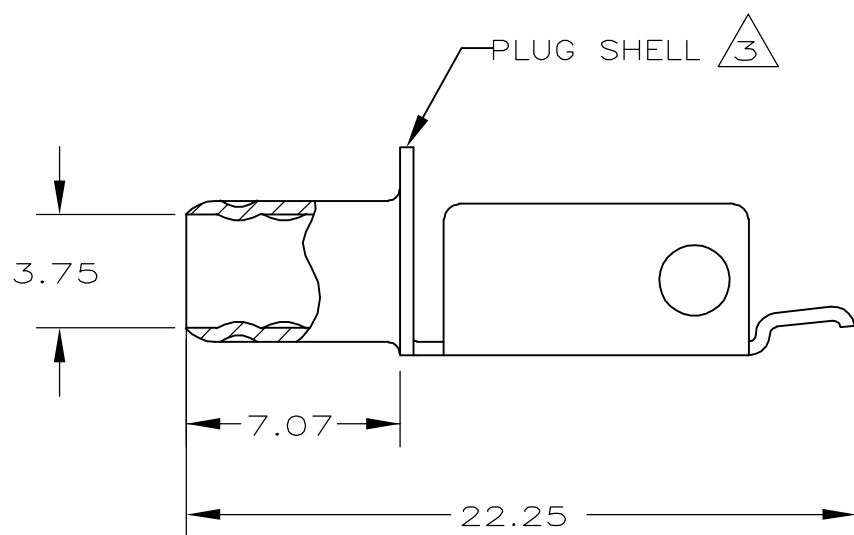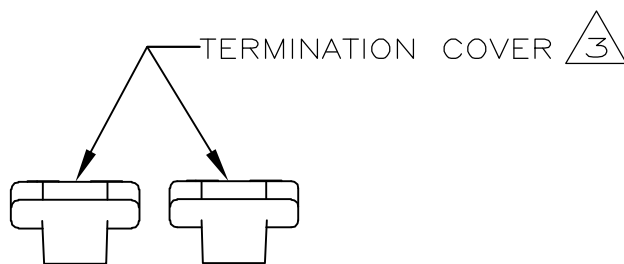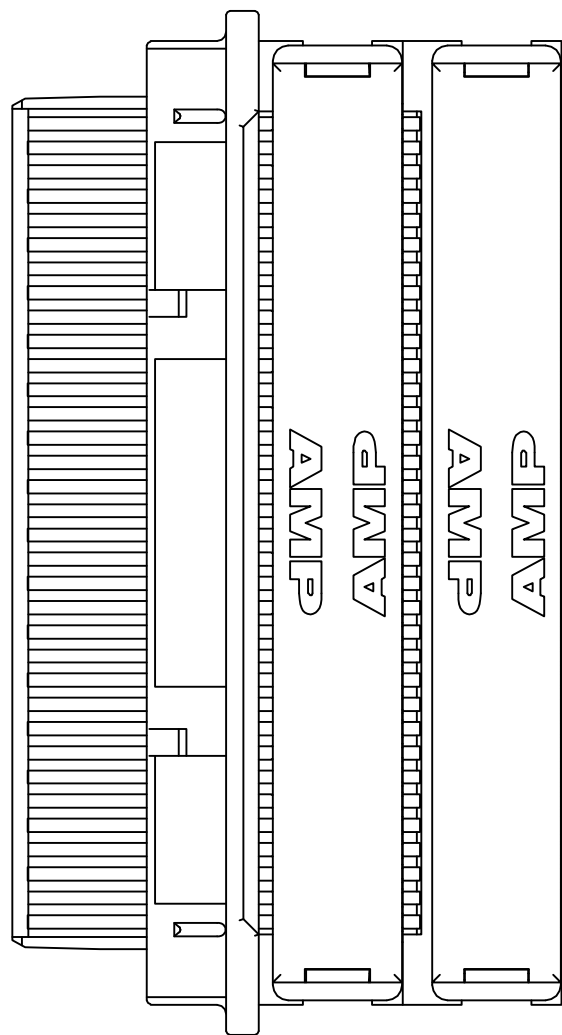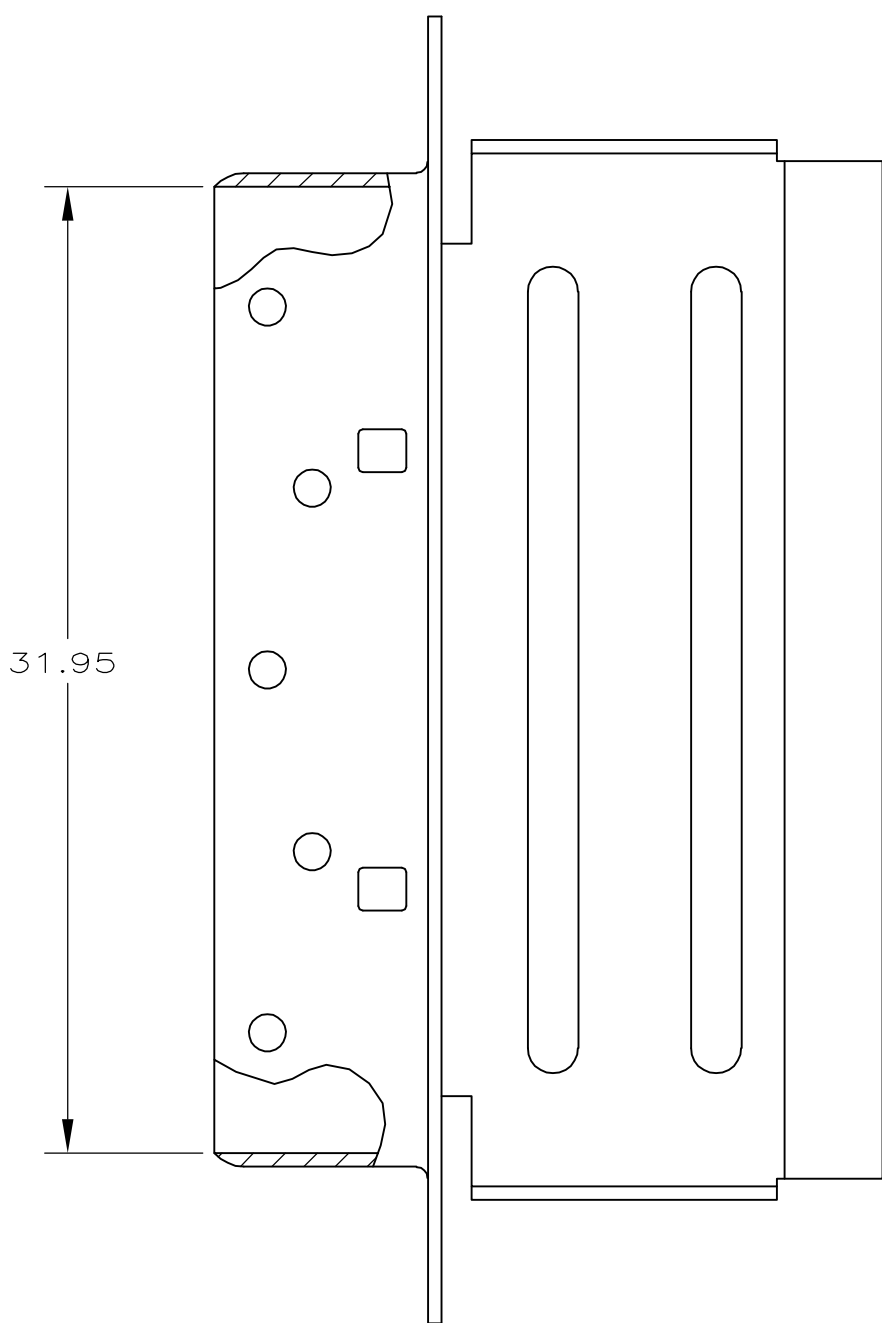

- 1 CONTACTS: PHOSPHOR BRONZE.
SHELL: CARBON STEEL.
HOUSING: LCP, UL94V-0 RATED, COLOR NATURAL.
COVERS: LCP, UL94V-0 RATED, COLOR BLACK.
- 2 CONTACTS: 0.76μm MINIMUM GOLD PLATE IN LOCALIZED GOLD PLATE AREA, 1.27μm MINIMUM TIN PLATE IN TERMINATION AREA, ALL OVER 1.27μm MINIMUM NICKEL.
SHELL: 5.08μm MINIMUM NICKEL OVER 1.27μm MINIMUM COPPER.
- 3 TERMINATION COVERS AND PLUG SHELL ARE PACKAGED UNASSEMBLED.
4. RECOMMENDED WIRE: 30 AWG WITH A 0.56-0.64 INSULATION DIAMETER, WIRE MUST BE APPROVED BY TYCO ELECTRONICS ENGINEERING.

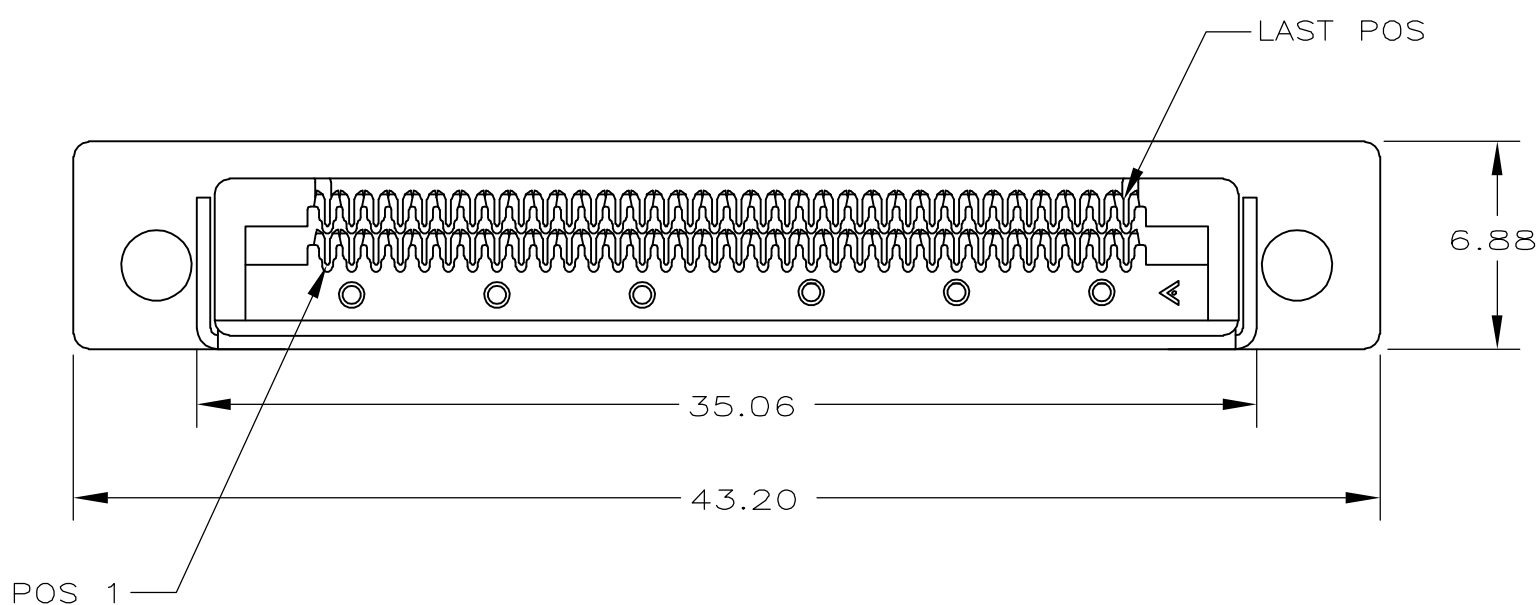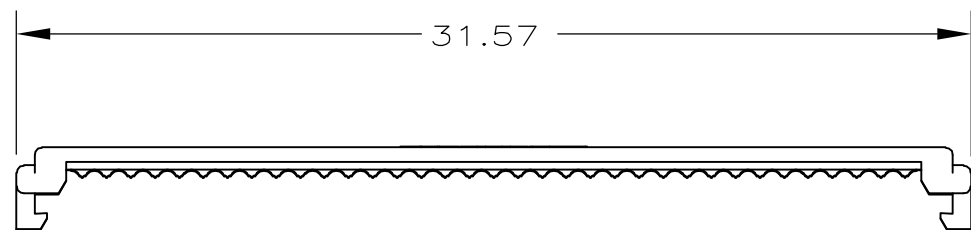

D

C

B

A

**COPYRIGHT 2005
TYCO ELECTRONICS CORP
ALL RIGHTS RESERVED**

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN J.GERACE 28JUL05		tyco Electronics Tyco Electronics Corporation Harrisburg, Pa 17105-3608			
DIMENSIONS:			CHK S.SHUEY 28JUL05					
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M.WALMSLEY 28JUL05		NAME PLUG KIT, UNASSEMBLED, 68 POS, OFFSET CABLE CONNECTOR, CHAMP 0.8MM		
		0 PLC ± -		PRODUCT SPEC				
		1 PLC ± -		108-1471				
		2 PLC ± 0.13		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO RESTRICTED TO		
		3 PLC ± -		-				
		4 PLC ± -		WEIGHT		A200779G-5787775		
		ANGLES ± -		-				
MATERIAL		FINISH		CUSTOMER DRAWING			SCALE	
							4:1	
							SHEET 1 OF 1	
							REV 0	

5787775

5787775-1
PART
NUMBER

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5787775-1](#)