



Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Assembly Type: **PCB Mount Header**

Connector System: **Wire-to-Board**

Number of Positions: **2**

Number of Rows: **1**

Centerline (Pitch): **6.35 mm [.25 in]**

Features

Product Type Features

Mixed & Hybrid Header	No
Connector Shape	Rectangular
PCB Connector Assembly Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Power Positions	2
Number of Columns	2
Number of Loaded Positions	2
Connector Contact Load Condition	Fully Loaded
Number of Positions	2
Number of Rows	1



PCB Mount Orientation	Vertical
-----------------------	----------

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Body Features

Primary Product Color	Natural
-----------------------	---------

Contact Features

Contact Size	2.2mm
PCB Contact Termination Area Plating Material Thickness	3.81 – 5.08 µm[150 – 200 µin]
Contact Layout	Inline
Mating Pin Diameter	2.2 mm[.087 in]
Contact Underplating Material Thickness	1.27 – 1.79 µm[50 – 70 µin]
Contact Mating Area Plating Material Thickness	.76 – .91 µm[30 – 36 µin]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Round
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material	Gold
Contact Type	Pin
Contact Current Rating (Max)	12 A

Termination Features

Termination Post & Tail Diameter	1.57 mm[.062 in]
Termination Post & Tail Length	3.56 mm[.14 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Mating Alignment Type	Polarization
Mating Retention	With
Panel Mount Feature	Without
Mating Retention Type	Locking Tab
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	Without



PCB Mount Retention

Without

Housing Features

Mating Entry Location	Top
Housing Material	Nylon
Centerline (Pitch)	6.35 mm[.25 in]

Dimensions

Connector Length	13.97 mm[.55 in]
Connector Height	13.97 mm[.55 in]
Connector Width	7.62 mm[.3 in]
PCB Thickness (Recommended)	1.57 mm[.062 in]
Profile Height from PCB	14.73 mm[.58 in]

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

UL Rating	Recognized
Glow Wire Rating	Standard Part - Not Glow Wire
Compatible With Agency/Standards Products	CSA, UL, VDE
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-2

Packaging Features

Packaging Quantity	200
Packaging Method	Bag

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	



Current ECHA Candidate List: JUNE 2024
(241)
Candidate List Declared Against: JUNE
2024 (241)
Does not contain REACH SVHC

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability	Wave solder capable to 265°C
---------------------------	------------------------------

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts


 TE Part # 640713-1 02P UMNL STR/REL & INSERT	 TE Part # 1-350589-0 STR/REL CLAMP NATL	 TE Part # 350811-1 STR/REL CLAMP	 TE Part # 640713-2 02P UMNL STR/RELIEVE
 TE Part # 1-480698-0 02P UMNL PLUG HSG NATL	 TE Part # 794269-1 02P UMNL INTERFACE SEAL	 TE Part # 794815-1 02P UMNL CAP HSG,HI TEMP	 TE Part # 1703062-1 CAP, 2 CIRCUIT , UNIVERSAL MATE-N-LOK



TE Part # 794991-1
02P UMNL BLACK INTERFACE SEAL



TE Part # 1586856-1
02P UMNL CAP HSG, GW

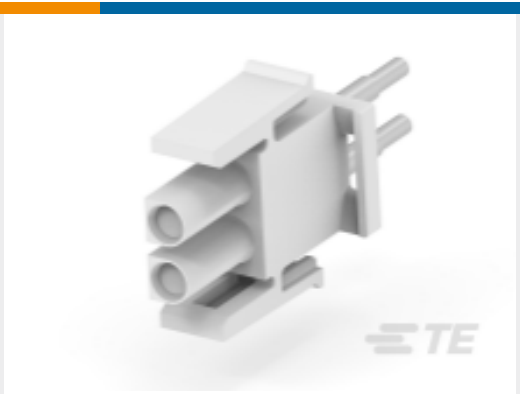

TE Part # 350848-2
02P UMNL PLUG TEST ASSY 94VO



TE Part # 1-640719-1
02P UMNL STR/REL NATL



TE Part # 794270-1
02P UMNL WIRE SEAL



TE Part # 1-640719-0
02P UMNL STR/REL & INSRT NATL



TE Part # 643250-1
02P UMNL ASSY MOD HSG V0



TE Part # 1703062-2
CAP, 2 CIRCUIT, UNIVERSAL MATE-N-LOK



TE Part # 1703062-3
CAP, 2 CIRCUIT, UNIVERSAL MATE-N-LOK



TE Part # 2-480699-0
02P UMNL CAP HSG NATL



TE Part # 2178649-1
2P UMNL CAP HSG, GW



TE Part # 2178649-2
2P UMNL CAP HSG, GW

Also in the Series | Universal MATE-N-LOK



Circular Power Connectors(2)



Connector Caps & Covers(34)



Connector Contacts(209)




Connector Hardware(12)




Connector Seals & Cavity Plugs(27)



Connector Strain Relief(7)

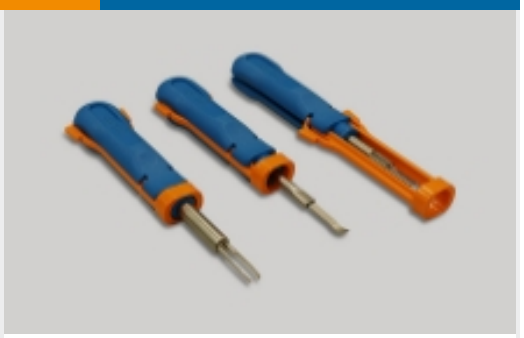

Insertion & Extraction Tools(4)

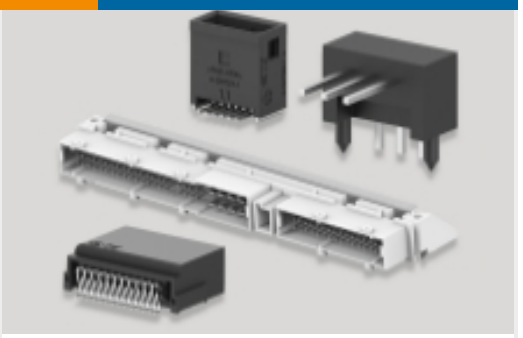

PCB Headers & Receptacles(285)



[Rectangular Connector Housings\(1\)](#)



[Rectangular Power Connectors\(370\)](#)



[Standard Circular Connectors\(1\)](#)

Customers Also Bought




TE Part #5747190-2
[09 RCPT SP/MS CNUT](#)



TE Part #292171-6
[CT POST HDR ASSY 6P IN-TUBE BL](#)



TE Part #4-6609987-5
[15SRBP=F8223H](#)

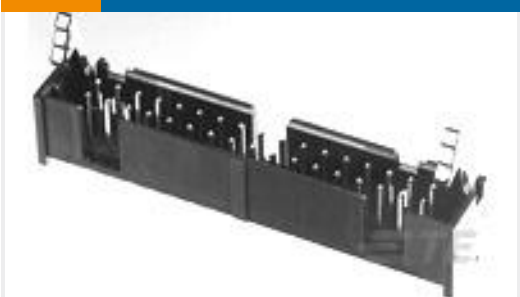

TE Part #1761606-9
[IDC LOW PRO HDR 26P VERT LG LA](#)




TE Part #5227754-2
[BNC SOLDER RECEPT JACK](#)



TE Part #5822030-3
[72 ME .050 VERT M/L PB-FREE](#)



TE Part #2356127-1
[FSP-73A-16V7](#)

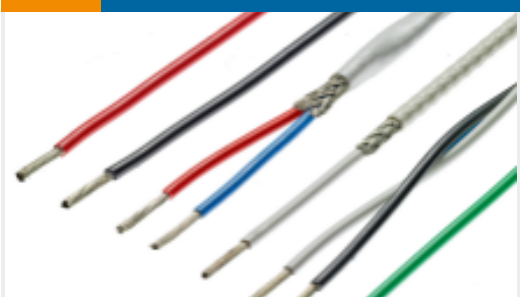

TE Part #383831-000
[44A0121-16-0/2](#)

Documents

Product Drawings

[02P UMNL PIN HDR ASSY NATL AU](#)

English

CAD Files

[3D PDF](#)

English

Customer View Model

[ENG_CVM_350428-4_Y.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_350428-4_Y.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_350428-4_Y.3d_stp.zip](#)

English

[3D PDF](#)



3D

Customer View Model

[ENG_CVM_CVM_350428-4_AH.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_350428-4_AH.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_350428-4_AH.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[SOFT_SHELL_PIN_SOCKET_CONNECTORS_STANDARD_DENSITY](#)

English

Product Specifications

[Application Specification](#)

English

Agency Approvals

[UL](#)

English