


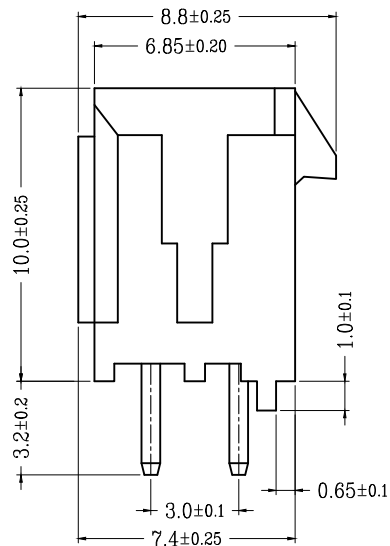
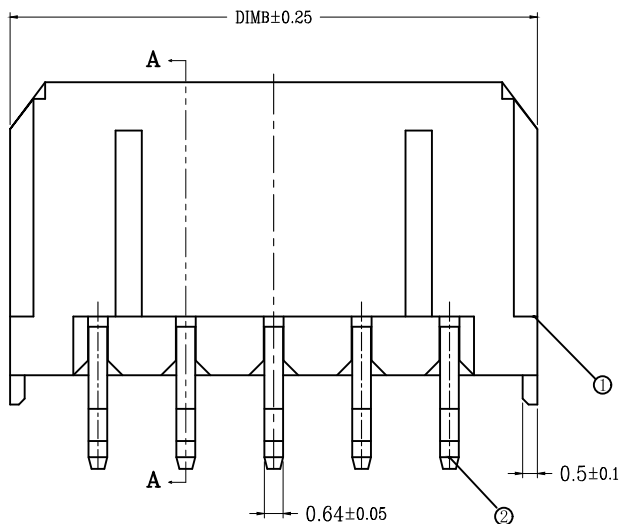


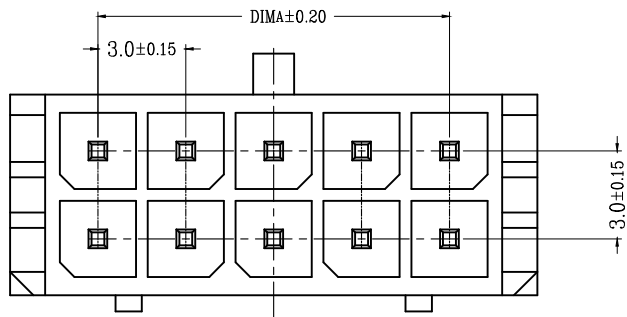

TYPE 1 (无K脚)

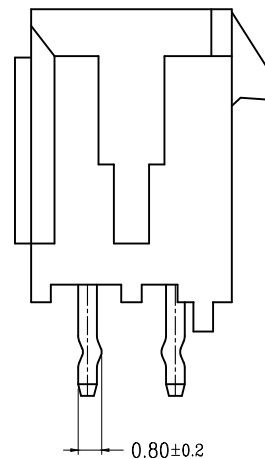

TYPE 2 (打K脚)

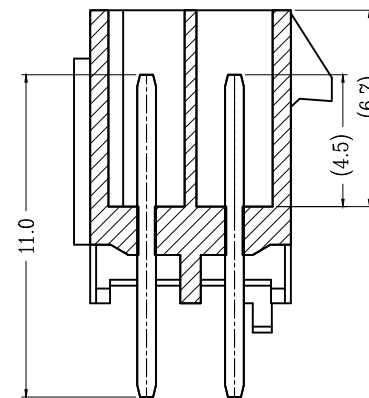


SECTION A-A

技术指标 (Technical Index):

1. 温度范围 (Temperature range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
2. 额定电压 (Rated voltage): 600V, AC, DC.
3. 额定电流 (Rated current): 5.0A AC, DC.
4. 接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$.
5. 耐压值 (Withstanding voltage): 1500V AC/minute.
6. 绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$.

CKT	A	B
2*1		6.00
2*2	3.0	9.00
2*3	6.0	12.00
2*4	9.0	15.00
2*5	12.0	18.00
2*6	15.0	21.00
2*7	18.0	24.00
2*8	21.0	27.00
2*9	24.0	30.00
2*10	27.0	33.00
2*11	30.0	36.00
2*12	33.0	39.00

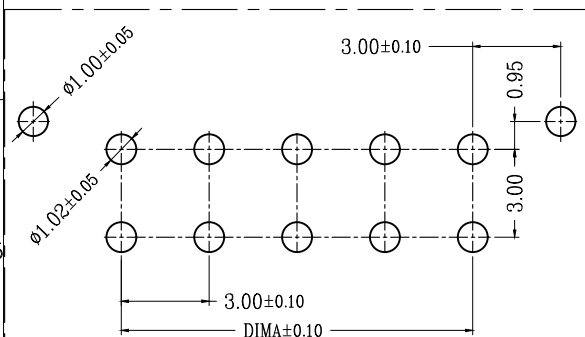

适用线路板 (PCB LAYOUT)

序号	品名	材质
①	MX3.0双排直针WTB胶芯	PA66 UL94V-0 黑色
②	MX3.0双排直针WTB端子	铜合金/表面镀锡

 深圳市万骏达电子有限公司 http://www.wanjunda.com	图号 (DWG NO)		单位 (UNIT): MM
	本 (REV)		比例 (SCALE) 1:1
	日期 (DATE)		
	设计 (DESIGN)		未注公差
	审核 (CHECKED)		TOLERANCE UNSPECIFIED
品名 (ITEM NO)	MX3.0双排直针WTB	核准 (APPROVED)	
料号 (PART NO)	WF-MX3.0-2nP-ZC		
模号 (MODEL NO)			