
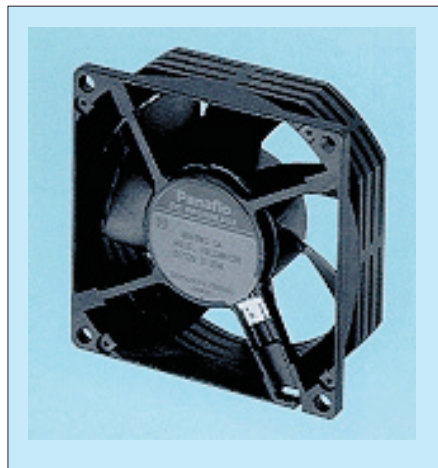


(mm)

Spin
⊖ pin
⊕ pin

■ Cut out



- Life Expectancy
50,000hours(40°C, 65%RH)
- Operating Temperature
-10°C~+70°C (65%RH)
- Storage Temperature
-40°C~+75°C (65%RH)
- Bearing Type
Hydro Wave Bearing

Basic Data

Below data is nominal value at room temperature.

	Rated Voltage (V)	Operating Voltage (V)	Current (mA)	Input Power (W)	Nominal Speed (min ⁻¹)	Noise (dB-A)
FBL08A12L	12	7~13.8	68	0.82	1900	21.0
FBL08A12M	12	7~13.8	124	1.49	2450	28.0
FBL08A12H	12	7~13.8	173	2.08	2950	32.0
FBL08A24L	24	14~27.6	54	1.30	1900	21.0
FBL08A24M	24	14~27.6	71	1.70	2450	28.0
FBL08A24H	24	14~27.6	105	2.52	2950	32.0

P-Q Characteristics

