


This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

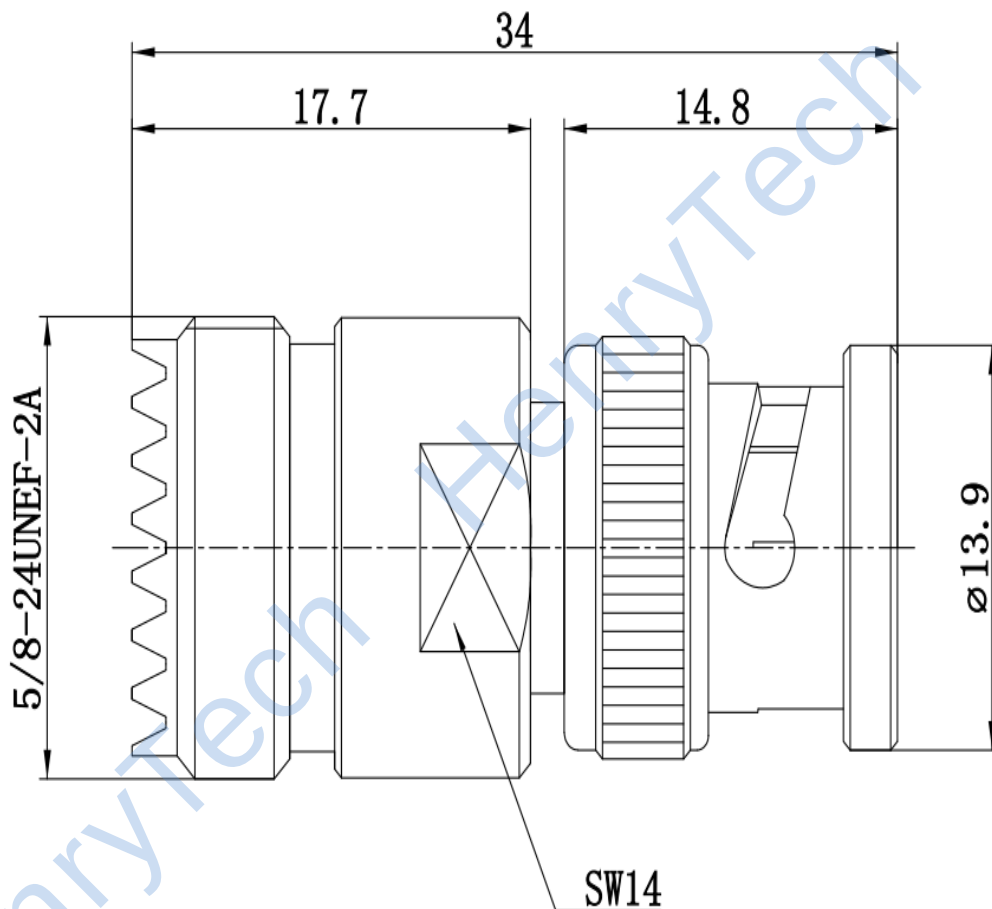

1 Electrical

1.1 Impedance	50 Ω
1.2 Frequency	DC-300MHz
1.3 VSWR	1.30:1

2 Environmental&Mechanical

2.1 Temperature range	-40°C~125°C
2.2 RoHs Compliant	
2.3 Durability	>500 cycles

3 Materials&Finish

3.1 Body:	Brass, Nickel plated
3.2 Insulator:	Teflon
3.3 Contact Pin:	Brass, Gold plated
3.4 Coupling Nut:	Brass, Nickel plated
3.5 Gasket:	Silicon rubber (red color)
3.6 C-ring:	Phosphor bronze, nickel plated

Notes:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED
X ± 0.50
.X ± 0.20
.XX ± 0.10
ANGLES $\pm 1^\circ$

TITLE:

RF Adaptor

UHF Female to BNC Male
Adaptor

PART NO: HL-UHF-BNC-KJ



DIMENSION IN MILLIMETERS (mm)

SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
----------	------------	------------	--------