



Ferrule

T&B Catalog Number:

F2028

UPC Number:

78621033997

Status:

Active

Description:

Polypropylene-Insulated Ferrule, Total Length .571 Inches/14.5mm, Pin Length .315 Inches/8mm, Pin Diameter .059 Inches/1.5mm, Base Diameter .118 Inches/3.0mm, Wire Range 18 AWG/1.00mm², Color Red, Copper, Tin Plated

WEB_USE

US Cutsheet PDF Catalog Link

<http://www-public.tnb.com/contractor/docs/stakon.pdf>

Features

Ferrules ensure reliable electrical connections when terminating conductors in screw clamp terminal blocks.

General

Ferrule Type	Insulated
Insulation Type	Polypropylene
Material	Copper
Finish	Electro -Tin Plated
Color	Red
Wire Range	18-17
Wire Size (mm ²)	1.00

Dimension Information

A (mm)	14.5
B (mm)	8.0
Diameter C (inches)	.059
Diameter C (mm)	1.5
Diameter D (inches)	.118
Diameter D (mm)	3.0
E (mm)	.15
A (inches)	.571
B (inches)	.315
E (inches)	.006

Specifications

Temperature Rating	105°C
Flammability Rating	94HB


Tooling

Tool Charts	Available on Website
Application Tools	T1, T3, ERG4
Recommended Tool	T1, T3, ERG4

Packaging

T&B Order Multiple	500
T&B Inner Pack	500
Package in Units	10000
T&B Sold in UOM	Each
T&B Weight Per UOM	0.63 lbs. per 1000

Application Support

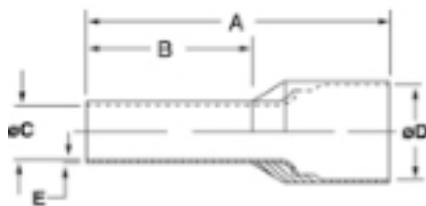

Overview

Available on Website

Wire Guide Tables

Available on Website

Notes

Ferrule dimensions conform to DIN 46228, Part 4.

Certifications

RoHS Compliance

Yes

For further technical assistance, please contact us...

Thomas & Betts - USA
8155 T&B Blvd.
Memphis, TN 38125
www.tnb.com

T&B Technical Support
MS 3B-50
8155 T&B Blvd.
Memphis, TN 38125

Hours: 7AM - 6PM CDT
Monday-Friday
Phone: (888) 862-3289
Fax: (901) 252-1321
Email: techsupport@tnb.com